
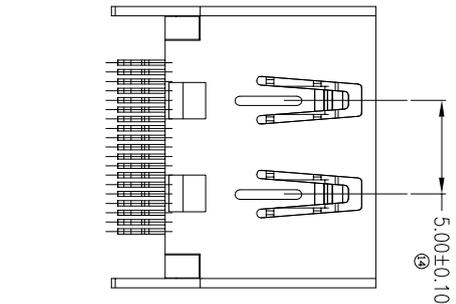
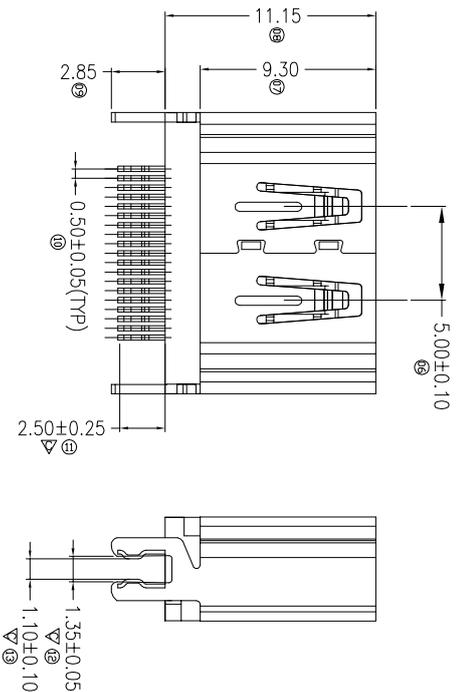


# RoHS 客户图

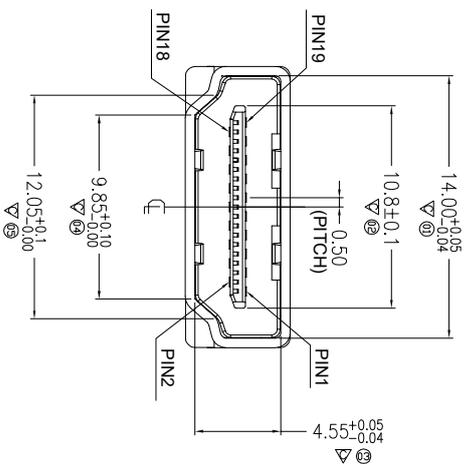

目錄 MAPX	變更內容 MODIFICATION	日期 DATE
A0	NEW	09-10-20

- NOTES:
1. MATERIAL:
- 1-1. INSERTMOLDING: LCP, COLOR:BACK, UL94-V0.
- 1-2. CONTACT: C2680(T=0.20mm);  
GOLD FLASH ON CONTACT AREA,  
100u" Min. Tin PLATED ON SOLDER TAILS.  
50u" Min. NICKEL PLATED OVERALL.
- 1-3. SHELL: SPCC,(T=0.50mm);  
100u" Min. NICKEL PLATED OVERALL.  
120u" Min. COPPER BOTTOM PLATED OVERALL.

2. ELECTRICAL CHARACTERISTICS:
- 2-1. CURRENT RATING: 0.5A
- 2-2. CONTACT RESISTANCE: 30mΩ MAX.
- 2-3. INSULATION RESISTANCE: 100MΩ MIN.
- 2-4. DIELECTRIC WITHSTAND VOLTAGE: AC 500V/MINUTE.
- 2-5. OPERATING TEMPERATURE RANGE: -25°C~+85°C
3. MECHANICAL CHARACTERISTICS:
- 3-1. INSERTION FORCE: 4.5Kgf MAX.
- 3-2. EXTRACTION FORCE: 1.0Kgf MIN, 4.0Kgf MAX.
4. DURABILITY: 10000 CYCLES.
5. SALT FOG TEST: 24H.
6. "⊗" SHOWS FAI MEASUREMENT POINT.
7. MARKED"▽"AS KEY CONTROL SIZE.

TABLE

料号对照表	
产品系列	品名规格
夹板母头	HDMI A/F 19P夹板1.4MM 绝缘橡胶 黑胶壳 弯针端子G/F PIN长2.50MM

产品图 PRODUCT CHART DWG		深圳市鑫风雷电子有限公司 Shenzhen xinfenglei Electronics Co., Ltd	
公差一览表 TOLERANCE UNLESS OTHERWISE		单位 UNITS	MM
X	±0.30	X'	±5'
X	±0.25	X''	±2'
XX	±0.20	XX'	±1'
XXX	±0.15	XXX'	±0.5'
比例 SCALE		日期 DATE	2009/10/20
制图 DRAWING		王冠 Wangguan	产品料号 PRODUCT NO.
审核 CHECK		雷永健 Lei Yongjian	产品名称 PRODUCT NO.
核准 APPR		雷永健 Lei Yongjian	联系方式 CONTACT INFO
			25027-HDMI-F01-X
			HDMI A/F 19P母座夹板1.4
			mailbox: sale1@xfll.com.com
			www.xfll.com.com