

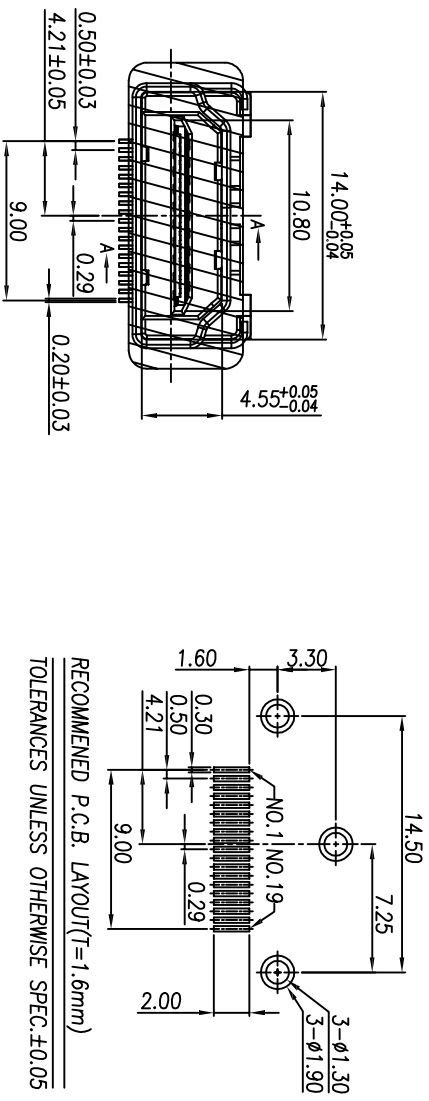


目錄 MAPX	變更內容 MODIFICATION	日期 DATE
A0	NEW	09-10-20

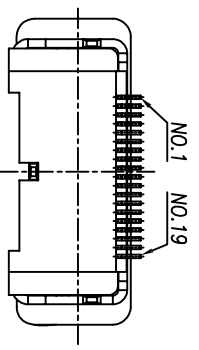

- NOTES:
- 1.) MATERIAL:
 - 1-1. HOUSING AND COVER:CP,UL 94V-0,COLOR:BLACK;
 - 1-2. CONTACT:BRASS T=0.20;
 - 1-3. SHELL:BRASS OR SPCC T=0.50;
 - 2.) FINISH:
 - 2-1. CONTACT: Au PLATING ON CONTACT AREA,(SEE P/N DESCRIBING) MATTE PURE Sn 120u" Min. PLATING ON SOLDERTAILS.50u" MIN. Ni UNDERPLATING OVERALL;
 - 3.) SPECIFICATIONS:
 - 3-1. VOLTAGE RATING: 40V
 - 3-2. CURRENT RATING: 0.5A
 - 3-3. INSULATION RESISTANCE: 100MEG.OHM MIN
 - 3-4. CONTACT RESISTANCE: 30 MILLIOHM MAX
 - 3-5. OPERATION TEMPERATURE: -20° TO +65°
 - 3-6. INSERT FORCE: 44.1N MAX
 - 3-7. EXTRACT FORCE: 9.8N MIN
 - 3-8. DURABILITY: 10000 CYCLES
 - 3-9. CONTACT PULL OUT FORCE:2.99N/PIN

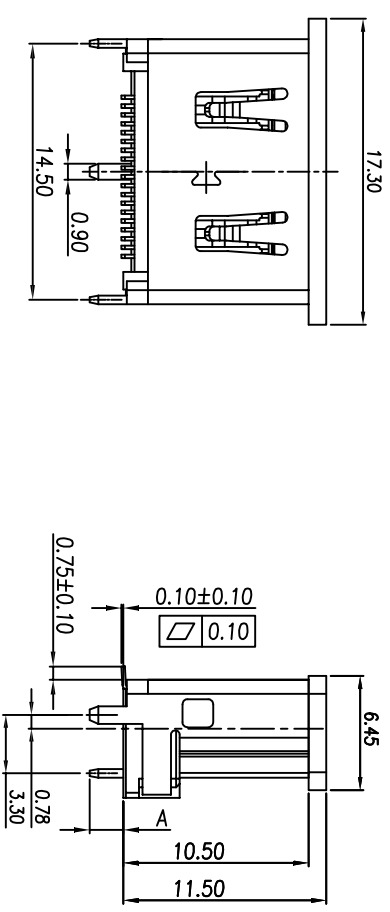

产品图

PRODUCT CHART DWG

深圳市鑫风雷电子有限公司

公差一覽表 TOLERANCE UNLESS OTHERWISE				單位 UNITS	MM	制圖 DRAWING	王冠	產品料號 PRODUCT PART NO.	17005-HDAF005-X		
X	±0.30	X'	±5°	比例 SCALE	1:1	審核 CHKD	雷永健	產品名稱 PRODUCT NO.	HDMI A型母座180度DIP H=10.5MM		
.XX	±0.30	.XX'	±2°	日期 DATE	2009/10/20	核准 APPD	雷永健	角法 VIEW	 	版本 VER	AO
.XXX	±0.15	.XXX'	±0.5°								