


RoHS 客户图






目錄 MAPX	變更內容 MODIFICATION	日期 DATE
A0	NEW	09-10-20

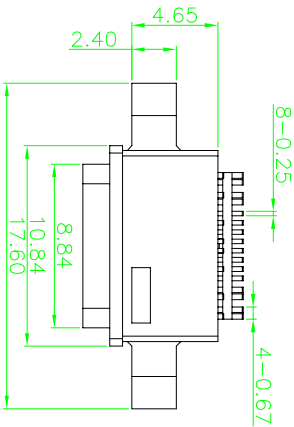

INTERFACE(FRONT VIEW)										
A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11 A12
GND			VBUS	CCI	DP1	SBU1	VBUS			GND
GND			VBUS	SBU2	DN2	DP2	CCI	VBUS		GND
B12	B11	B10	B9	B8	B7	B6	B5	B4	B3	B2

PIN ASSIGNMENT

PIN NO.	A1&B12	A4&B9	B8	A5	B7	A6	A7	B6	A8	B5	A9&B4	A12&B1
SIGNAL NAME	GND	VBUS	SBU2	CCI	DN2	DP1	DN1	DP2	SBU1	CCI2	VBUS	GND
PCB PAD NO.	C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12

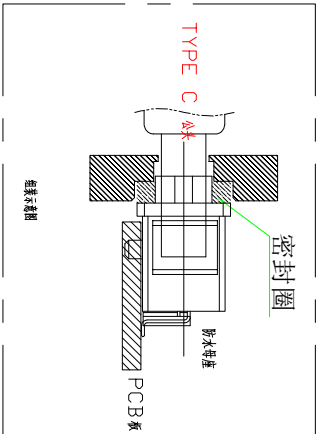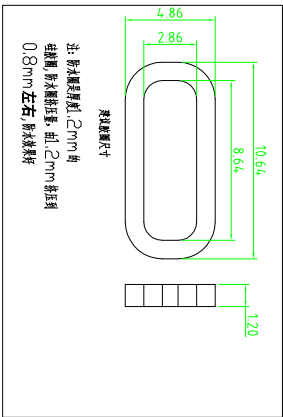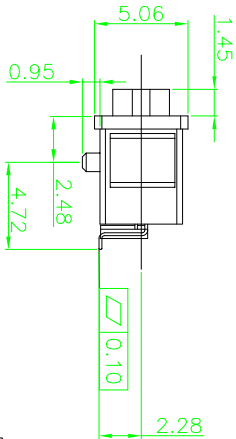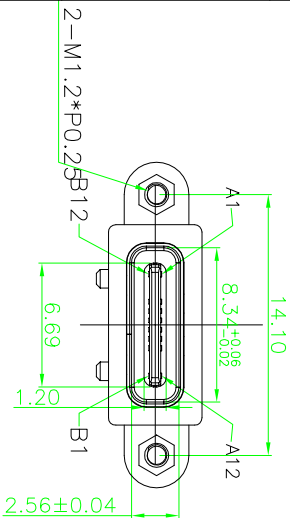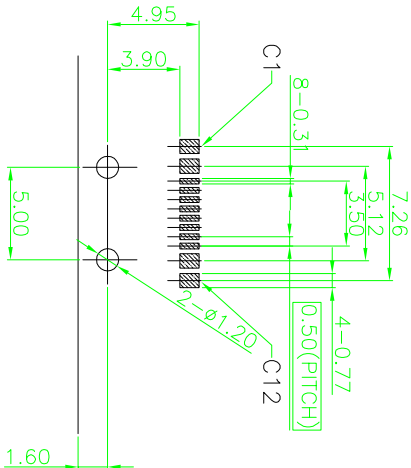

RECOMMENDED PCB LAYOUT(TOP VIEW)
THICKNESS T=1.0mm
DEFAULT TOLERANCE+/-0.05

NOTES:
1. MATERIAL: SEE "TABLE 1";
2. FINISH: SEE "TABLE 1";

3. ELECTRICAL:
- 3-1. CONTACT CURRENT RATING:
5A(BUS PIN 1.5A/PIN),
5A(GND PIN 1.25A/PIN MAX)/0.25A/PIN(OTHER PIN).
 - 3-2. INSULATION RESISTANCE:
100 MEGAOHMS MIN. AT 250VDC.
 - 3-3. DIELECTRIC WITHSTANDING VOLTAGE:
100VAC MIN.
 - 3-4. FLOW LEVEL CONTACT RESISTANCE:
INITIAL 40mΩ MAX.
AFTER 50mΩ MAX.
4. MECHANICAL CHARACTERISTICS:
- 4-1. MATING FORCE: 5~20N;
 - 4-2. UNMATING FORCE: 8~20N(INITIAL)/6~20N(AFTER 10000 CYCLES);
 - 4-3. DURABILITY: 10,000 MATING CYCLES.
 - 4-4. OPERATING TEMPERATURE: -40°C TO +80°C

产品图

PRODUCT CHART DWG

公差一览表

TOLERANCE UNLESS OTHERWISE		比例	审核	产品料号	00706-UCAF005-A
UNITS	MM	SCALE	CHKD	PRODUCT PART NO.	
X.	±0.30	X.	±5°	雷永健	Type C 16p 母座焊线带螺母防水型
.X	±0.25	.X	±2°	Leiyoungjian	
.XX	±0.20	.XX	±1°	雷永健	版本
XXX	±0.15	.XXX	±0.5°	Leiyoungjian	
日期		2009/10/20	核准	角法	A0
DATE			APPRO	VIEW	
					版本

深圳市鑫风雷电子有限公司
Shenzhen xinfenglei Electronic Co., Ltd