

RoHS 客户图

目錄 MAPX	設定內容 MODIFICATION	日期 DATE
A0	NEW	09-10-20

NOTES:

一、MECHANICAL:





1. MATING FORCE: 5-20N .
2. UNMATING FORCE: 8-20N .
3. DURABILITY: 10000 CYCLES

二、ELECTRICAL:

- 1 CONTACT CURRENT RATING: 1.25A/PIN FOR VBUS AND GND, 0.9A/PIN FOR ALL OTHER CONTACT.
- 2 DIELECTRIC WITHSTANDING VOLTAGE: 100V AC AT SEA LEVEL.
- 3 LOW LEVEL CONTACT RESISTANCE: 40mΩ MAX FOR VBUS AND GND, 50mΩ MAX FOR OTHER CONTACTS.
- 4 INSULATION RESISTANCE: 100MΩ MIN AT 250VDC.
5. OPERATING TEMPRATUR: -55°~85°

三、Materials&Plating

1. Contact: High performance copper alloy C7025, 30u"Min Au ON CONTACT AREA, 120u"Min TIN ON SOLDER AREA. 60u"NICHEL UNDERPLATING OVERALL.
2. Housing: LCP E1301 UL94V-0
3. Shell: Stainless Steel SUS304;.60u" NICKEL PLATING OVER ALL.
4. Retention Latch:Stainless Steel SUS301;.50u" NICKEL PLATING 100u"Min TIN ON SOLDER AREA

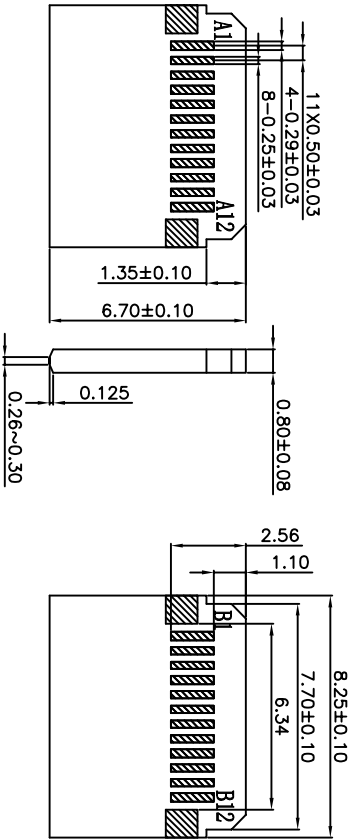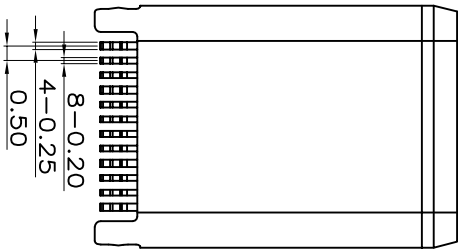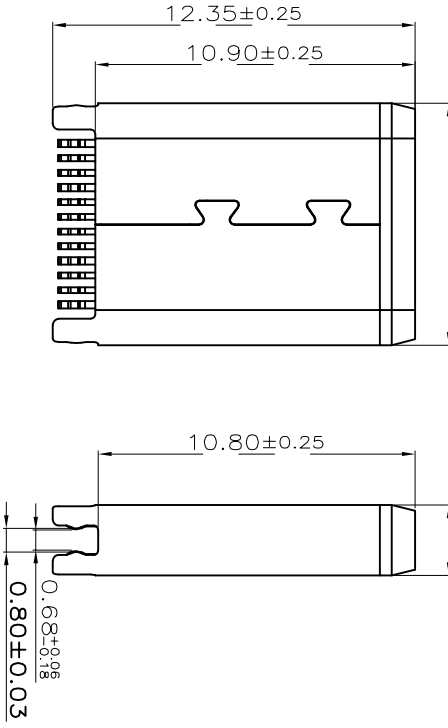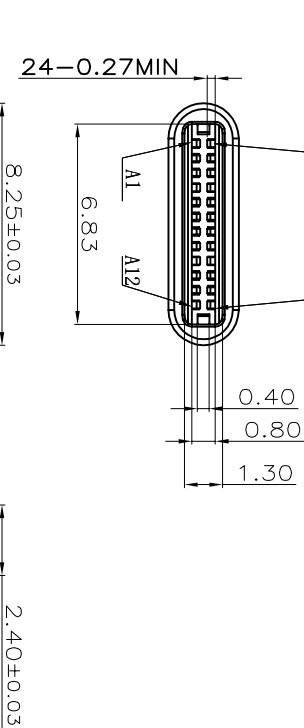

产品图

PRODUCT CHART DWG

深圳市鑫风雷电子有限公司
Shenzhen xinfenglei Electronics Co., Ltd

公差一览表 TOLERANCE UNLESS OTHERWISE		单位 UNITS	MM	制图 DRAWING	产品料号 PRODUCT PART NO
X	±0.30	X'	±5'	王冠 Wangguan	17014-UCAM001-X
X	±0.25	X'	±2'	雷永健 Lei Yongjian	产品名称
XX	±0.20	XX'	±1'	审核 CHD	PRODUCT NO.
XXX	±0.15	XXX'	±0.5'	日期 DATE	联系方式 Mailbox/web
				2009/10/20	Leiyongjian
				核准 Appd	联系方武 Mailbox/web
					www.xfl.com.cn