
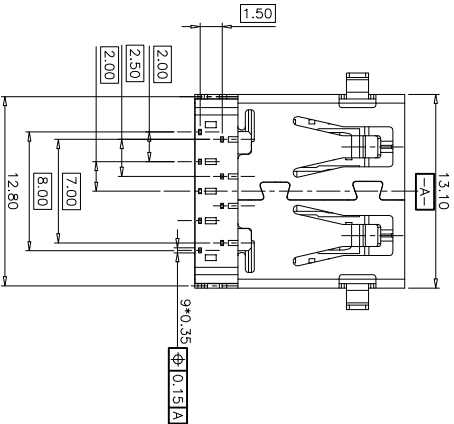

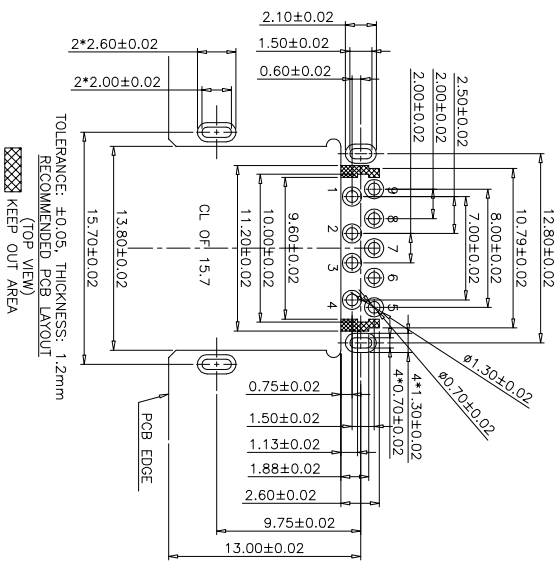


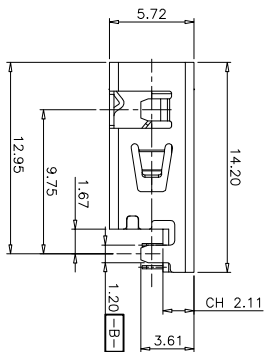


# RoHS 客户图



目錄 MAPX	变更内容 MODIFICATION	日期 DATE
A0	NEW	09-10-20

- NOTE:
- MATERIAL:
    - INSULATOR: LCP UL 94V-0
    - CONTACT: BRONZE (T=0.20mm)
    - SHELL: SUS201 (T=0.30mm)
  - ELECTRICAL CHARACTERISTICS:
    - CONTACT RESISTANCE: 30mΩ MAXIMUM
    - CONTACT CURRENT RATING: 1.5A
    - DIELECTRIC WITHSTANDING VOLTAGE: 500 V R. M. S.
    - INSULATION RESISTANCE 1000 MEGOHMS MIN
    - OPERATING TEMPERATURE: -40° C ~ 85° C
  - MECHANICAL CHARACTERISTICS:
    - MATING FORCE: 3.57kg MAX
    - UNMATED FORCE: 1.02kg MIN
    - DURABILITY: MANDATORY: 5,000 CYCLES
  - PLATING
    - TERMINAL:
      - MIN NICKEL ALL OVER
      - 50u" MIN TIN ON SOLDER AREA
      - 100u" MIN TIN ON CONTACT AREA (1~30) u" Au ON CONTACT AREA
      - SHELL: 100u" MIN. NICKEL ALL OVER

## 产品图

PRODUCT CHART DWG

### 公差一览表

TOLERANCE UNLESS OTHERWISE	UNIT	SCALE
X	±0.30	±5'
X	±0.25	±2'
.XX	±0.30	±1'
.XXX	±0.15	±0.5'

深圳市鑫风雷电子有限公司  
Shenzhen xinfenglei Electronic Co., Ltd

Pin #	1	2	3	4	5	6	7	8	9	Shell
SIGNAL NAME	VBUS	D-	D+	GND	Stda_SSTRx	Stda_SSTRx	Stda_SSTRx	Stda_SSTRx	Stda_SSTRx	Shield

单位	MM	制图	王冠	产品料号	26015-U3AF015-X
比例	1:1	审核	雷永健	产品名称	USB 3.0 AF 90度沉板2.11双排DP L=14.2
日期	2009/10/20	核准	雷永健	角法	版本
		APPD		视图	A0