
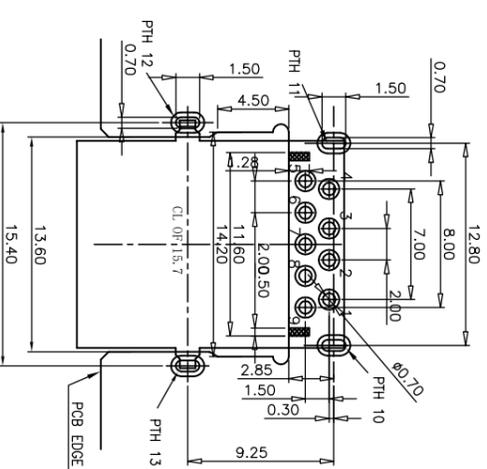
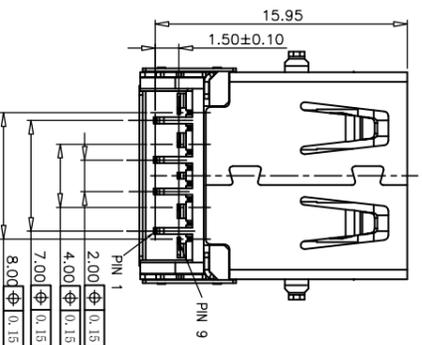
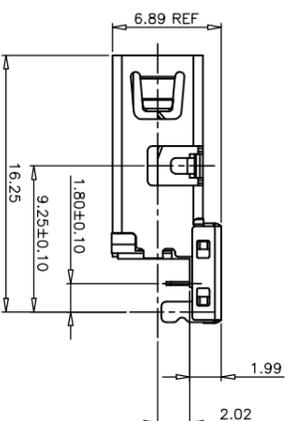




ROHS

客户图



TOLERANCE: ±0.05, THICKNESS: 1.2mm
 RECOMMENDED PCB LAYOUT
 (TOP VIEW)
 KEEP OUT AREA

- NOTE:
- MATERIAL:
 - INSULATOR:HIGH TEMPERATURE PLASTIC UL 94 V-0;BLUE
 - CONTACT:COPPER ALLOY(T=0.20mm)
 - SHELL:SUS201(T=0.30mm)
 - ELECTRICAL CHARACTERISTICS:
 - CONTACT RESISTANCE:30mΩ Max
 - CONTACT CURRENT RATING:1.5A
 - DIELECTRIC WITHSTANDING VOLTAGE:500 V R.M.S.
 - INSULATION RESISTANCE 100 MEGOHMS Min
 - OPERATING TEMPERATURE:-40°C ~ 85°C
 - MECHANICAL CHARACTERISTICS:
 - MATING FORCE:35 N Max
 - UNMATED FORCE:10 N Min INITIAL; 8 N Min AFTER TEST
 - DURABILITY:5,000 CYCLES
 - PLATING
 - TERMINAL CONTACT:(SEE TAB) GOLD PLATING ALL OVER 50u" MIN NICKEL AND 80u"MIN Matte Tin ALL OVER 50u" MIN NICKEL IN SOLDER AREA
 - SHELL:50u"MIN. NICKEL ALL OVER

4	USB 3.0 A/F DIP外壳	C2680R-H	1
3	USB 3.0 A/F DIP下端子	C2680	5
2	USB 3.0 A/F DIP上端子	C5191	4
1	USB 3.0 A/F DIP胶芯	PBT+30%GF	1
序号	产品名称	材 质	数量

产品图

PRODUCT CHART DWG

公差一览表

TOLERANCE UNLESS OTHERWISE		OTHERWISE	
X.	±0.30	X.	±5°
.X	±0.25	.X	±2°
.XX	±0.30	.XX	±1°
.XXX	±0.15	.XXX	±0.5°

深圳市鑫风雷电子有限公司

单位	MM	制图	王冠	产品料号	00405-U3AF004-X
比例	1:1	审核	雷永健	产品名称	USB3.0 A/F 90度沉板反向四脚无边L=16.9
日期	2009/10/20	核准	雷永健	角法	版本
DATE		APPD		VIEW	A0

目錄	设定内容	日期
MAPX	MODIFICATION	DATE
A0	NEW	09-10-20