
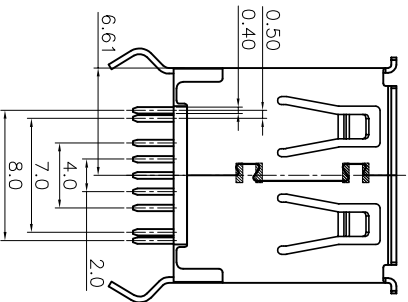

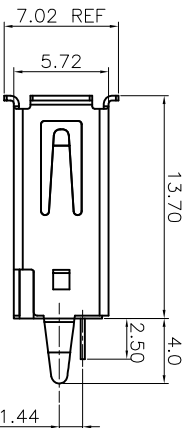

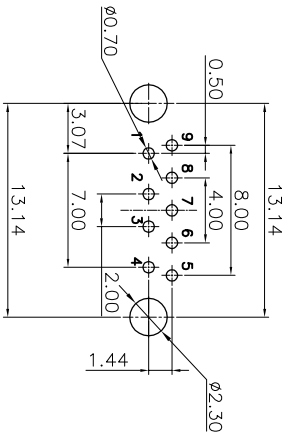


1 2 3 4 5 6 7 8 9 10

Rohs 客户图

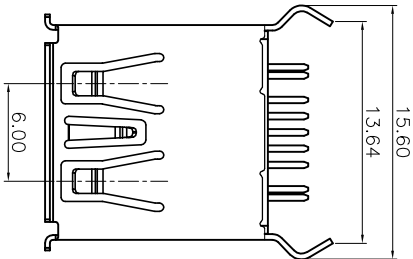

NOTES:

1. MATERIAL:

- 1.1 HOUSING: HIGH TEMPERATURE THERAL PLASTIC.
- 1.2 SPRING CONTACT: COPPER ALLOY.
- 1.3 FLAT CONTACT: COPPER ALLOY
- 1.4 SHELL : COPPER ALLOY.
- 1.5 COVER: HIGH TEMPERATURE THERAL PLASTIC.

2. FINISH:

- 2.1 CONTACT: (SEE P/N.), [50 μ] MIN. NICKEL UNDERPLATING OVER ALL.
- 2.2 SHELL: [50 μ] MIN. SOLDERABILITY NICKEL UNDERPLATING OVER ALL.

产品图

深圳市鑫风雷电子有限公司

公差一览表				单位				制图				产品料号			
TOLERANCE UNLESS OTHERWISE				UNITS				DRAWING				PRODUCT PART NO.			
X	±0.30	X'	±5°	MM				王冠				00505-U3AF021-A			
X	±0.25	X'	±2°	比例 1:1				审核 雷永健				产品名称			
XX	±0.30	XX'	±1°	SCALE				日期 2009/10/20				角法			
.XXX	±0.15	.XXX'	±0.5°	DATE				批准 雷永健				版本			
				APPD				VIEW				A0			

PIN NO.	PIN 1	PIN 2	PIN 3	PIN 4
SIGNAL NAME	V BUS	D-	D+	GND
REMARK	USB 2.0 CONTACT PINS			

PIN NO.	PIN 5	PIN 6	PIN 7	PIN 8	PIN 9
SIGNAL NAME	STDA_SSRX-	STDA_SSRX+	GND_DRAIN	STDA_SSTX-	STDA_SSTX+
REMARK	USB 3.0 CONTACT PINS				