

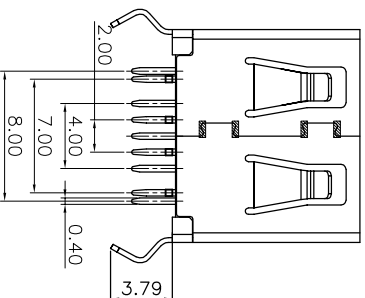
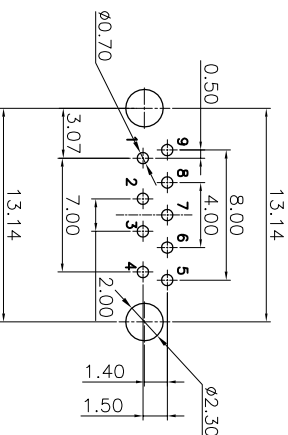




RoHS 客户图

目錄 MAPX	變更內容 MODIFICATION	日期 DATE
A0	NEW	09-10-20

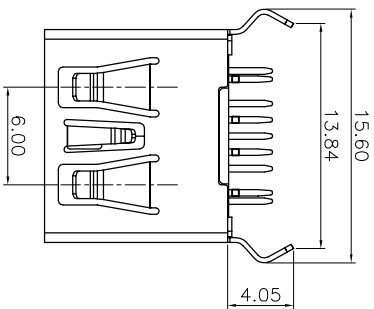

- NOTES:
- 1.MATERIAL:
- 1.1 HOUSING: HIGH TEMPERATURE THERAL PLASTIC.
 - 1.2 SPRING CONTACT: COPPER ALLOY.
 - 1.3 FLAT CONTACT: COPPER ALLOY
 - 1.4 SHELL :COPPER ALLOY.
 - 1.5 COVER:HIGH TEMPERATURE THERAL PLASTIC.

- 2.FINISH:
- 2.1 CONTACT: (SEE P/N,)[50 μ] MIN. NICKEL UNDERPLATING OVER ALL.
 - 2.2 SHELL: [50 μ] MIN.SOLDERABILITY NICKEL UNDERPLATING OVER ALL.

PIN NO.	PIN 5	PIN 6	PIN 7	PIN 8	PIN 9
SIGNAL NAME	STDA_SSRX-	STDA_SSRX+	GND_DRAIN	STDA_SSTX-	STDA_SSTX+
REMARK	USB 3.0 CONTACT PINS				

PIN NO.	PIN 1	PIN 2	PIN 3	PIN 4
SIGNAL NAME	V BUS	D-	D+	GND
REMARK	USB 2.0 CONTACT PINS			

产品图

深圳市鑫风雷电子有限公司

公差一览表		单位		制图		产品料号	
TOLERANCE	UNLESS OTHERWISE	UNITS	MM	DRAWING	王冠	PRODUCT PART NO.	00505-13AF002-X
X	±0.30	X'	±5'	比例	雷永健	产品名称	USB3.0 A ⁺ 180度弯脚无边H=11.5
XX	±0.25	X''	±2'	SCALE	雷永健	PRODUCT NO.	
.XX	±0.30	.XX'	±1'	日期	雷永健	角法	
.XXX	±0.15	.XXX'	±0.5'	DATE		版本	A0
				核准		VIEW	

PRODUCT CHART.DWG