
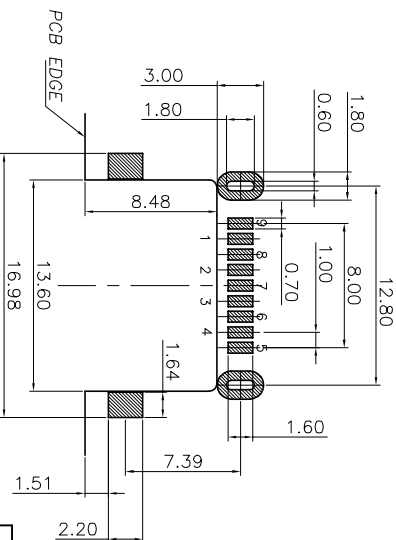
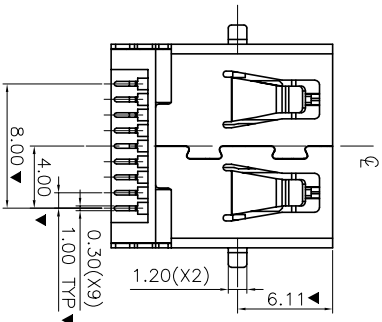






1 2 3 4 5 6 7 8 9 10

RoHS 客户图



RECOMMENDED PCB LAYOUT
TOLERANCE:±0.05 (TOP VIEW)

产品图

PRODUCT CHART DWG

公差一览表

TOLERANCE UNLESS OTHERWISE	公差	UNIT
X ±0.30	X'	±5°
X ±0.25	X'	±2°
XX ±0.30	XX'	±1°
XXX ±0.15	XXX'	±0.5°

深圳市鑫风雷电子有限公司

单位	MM	制图	王冠	产品料号	00505-U3AF018-X
比例	1:1	审核	雷永健	产品名称	3.0 USB A沉板SMT H=2.45直脚无边L=4.25
日期	2009/10/20	核准	雷永健	角法	⊕ ⊖
DATE	2009/10/20	APPD	雷永健	版本	A0

目錄	变更记录	日期
MAPX	MODIFICATION	DATE
A0	NEW	09-10-20

NOTES:

一. SPECIFICATIONS:

- 1.1: CONTACT CURRENT RATING:
1.8 A FOR PIN1&PIN4.
0.25 A OTHER CONTACTS
- 1.2: DIELECTRIC WITHSTANDING VOLTAGE:AC 100V(RMS)
- 1.3: INSULATION RESISTANCE:100MEGOHMS MINIMUM.
- 1.4: CONTACT RESISTANCE:
30mΩ MAX FOR PIN1&PIN4
50mΩ MAX FOR OTHER CONTACTS
- 1.5: MECHANICAL CHARACTERISTICS:
DUTABILITY :6000 CYCLES.
MATING FORCE:35N MAX.
UNMATING FORCE:10N Min.
- 1.6: ENVIRONMENTAL CHARACTER: SALT SPRAY: 24H
- 1.7: OPERATING TEMPERATURE:-55 °C+85 °C

二. MATERIAL:

- 2.1 HOUSING: HIGH TEMPERATURE THERAL PLASTIC.
- 2.2 CONTACT: COPPER ALLOY.
- 2.3 SHELL :COPPER ALLOY.

三. FINISH:

- 3.1 CONTACT: (SEE P/N.),[50u"] MIN. NICKEL UNDERPLATING OVER ALL.
- 3.2 SHELL: [50u"] MIN.SOLDERABILITY NICKEL UNDERPLATING OVER ALL.

PIN NO.	PIN 1	PIN 2	PIN 3	PIN 4
SIGNAL NAME	V BUS	D-	D+	GND
REMARK	USB 2.0 CONTACT PINS			

PIN NO.	PIN 5	PIN 6	PIN 7	PIN 8	PIN 9
SIGNAL NAME	STDA_SSRX-	STDA_SSRX+	GND_DRAIN	STDA_SSTX-	STDA_SSTX+
REMARK	USB 3.0 CONTACT PINS				