


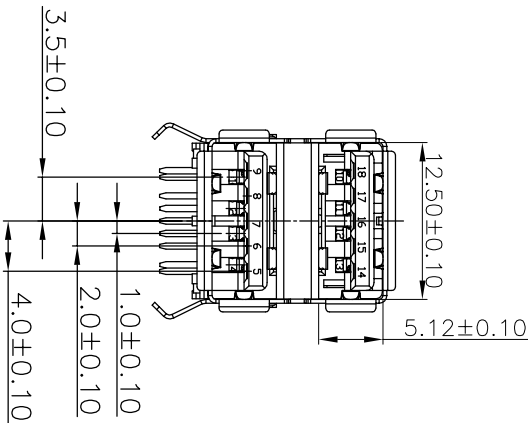



1 2 3 4 5 6 7 8 9 10

Rohs 客户图




Pin #	SIGNAL NAME	DESCRIPTION	MATING SEQUENCE
1	VBUS	POWER	SECOND
2	D-	USB 2.0 DIFFERENTIAL PAIR	THIRD
3	D+		
4	GND	GROUND FOR POWER RETURN	SECOND
5	Sida_SSRX-	SUPERSPEED RECEIVER DIFFERENTIAL PAIR	LAST
6	Sida_SSRX+		
7	GND_DRAIN	GROUND FOR SIGNAL RETURN	
8	Sida_SSTX-	SUPERSPEED TRANSMITTER DIFFERENTIAL PAIR	
9	Sida_SSTX+		
Shell	Shield	CONNECTOR METAL SHELL	FIRST

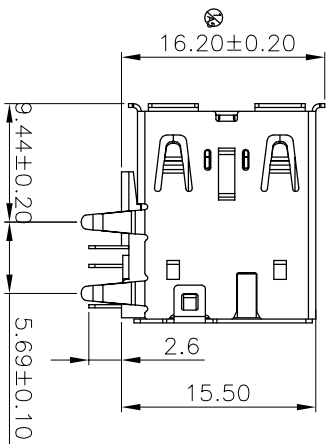

目錄 MAPX	變更內容 MODIFICATION	日期 DATE
A0	NEW	09-10-20

- SPECIFICATIONS:
- 1.0 Electrical Performance:
 - 1.1 Contact current Rating:
 - 1.80 Amperes for VBUS and GND contacts
 - 0.25 Amperes for all other contacts
 - 1.2 Dielectric Withstanding Voltage:AC 100V(RMS).
 - 1.3 Insulation resistance:100M ohms Min
 - 1.4 Contact Resistance:
 - 30m ohm Max for all other contacts
 - 50m ohm Max for VBUS and GND contacts
 - 1.5 Voltage Rating : 30 Vac (rms)
 - 2.0 Mechanical Performance:
 - 2.1 Mating Force:35N Max
 - 2.2 Unmating Force:10N Min;8N Min After Durability.
 - 3.0 Environmental Performance:
 - 3.1 Temperature Range:
 - 3.1.1 Operating Temperature:-55°C to +85°C
 - 3.1.2 Storage Temperature:-20°C to +60°C
 - 3.2 Salt Spray 24h Min
 - 4.0 MATERIAL:
 - 4.1 Housing:see table UL94 V-0
 - 4.2 Contact:2.0 Contacts C5191
 - 3.0 Contacts C2680
 - 4.3 Shell:see table
 - 5.0 PLATING:
 - 5.1 Contact:Au Plated on contact area
 - Tin 100u” Plated on solder area
 - Nickel 50u” Plated underplating over all.
 - 5.2 Shell: Nickel 50u” Plated.

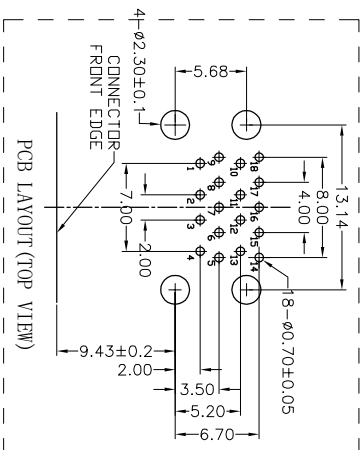

产品图

PRODUCT CHART DWG

公差一览表

公差一览表	单位	MM	制图	王冠	产品料号	11005-U3AF004-A
TOLERANCE UNLESS OTHERWISE	UNITS		DRAWING		产品名称	USB 3.0 AF双层90度弯脚有边
X ±0.30	X'	±5'	比例	1:1	审核	雷永健
X ±0.25	X'	±2'	SCALE		核准	雷永健
.XXX ±0.15	.XXX'	±1.5'	日期	2009/10/20	角法	版本
			DATE		VIEW	A0

深圳市鑫风雷电子有限公司