



RoHS 客户图

目錄 MAPX	變更內容 MODIFICATION	日期 DATE
A0	NEW	09-10-20

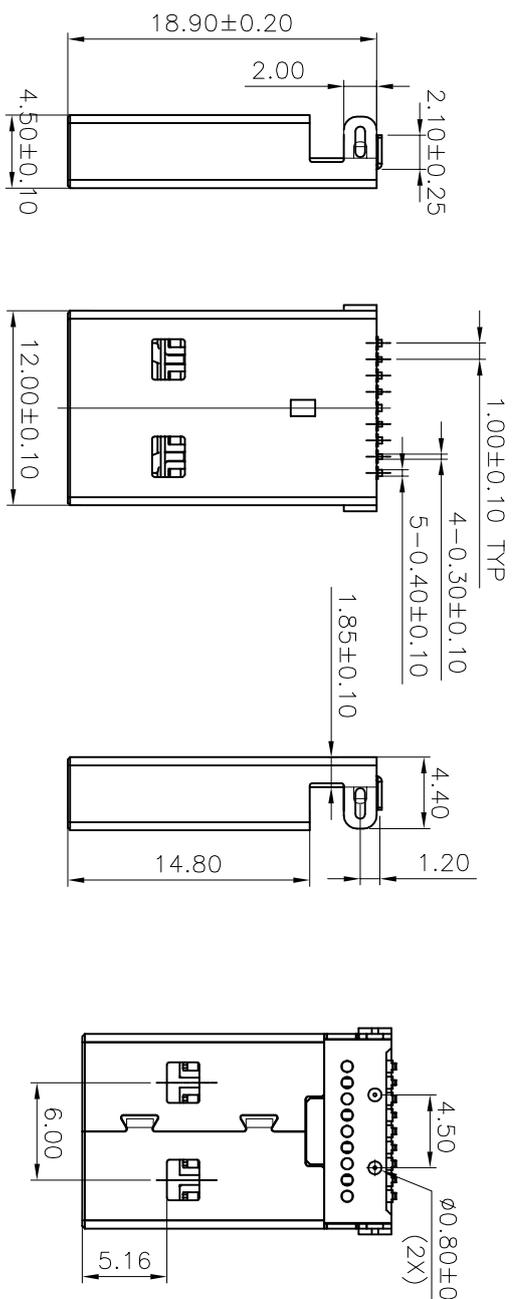

SPECIFICATIONS:
 Contact current Rating:
 1.8 Amperes for pin1&pin4,
 0.25 Amperes other contacts
 Dielectric Withstanding Voltage:AC 100V/(RMS)
 Insulation resistance:100Megohms Minimum.
 Contact Resistance:
 50mΩ Max for pin1&pin4
 50mΩMax for other contacts
Mechanical Characteristics:
 Mating Force:35 Newtons,Maximum
 Unmating Force:10 Newtons,Minimum.
MATERIAL:
 Housing: LCP+30%GF 94V-0 COLOR:BLUE
 Contact: copper alloy(T=0.25mm)
 Shell: SPCC
PLATING:
 Contact: Au Plated on contact area
 Tin Plated on solder area
 Nickel underplating over all
 Shell: Nickel Plated
 operating Temperature:-55°to+85°

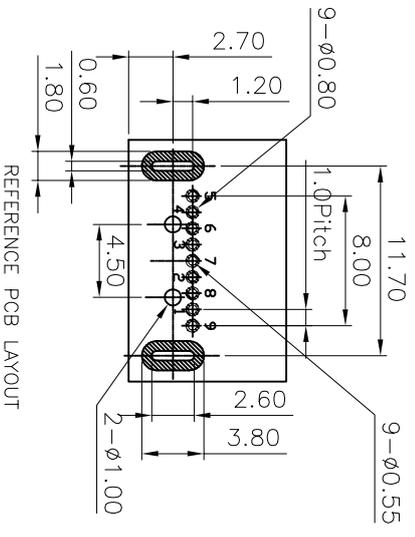

REFERENCE PCB LAYOUT

Pin NUMBER	SIGNAL NAME
1	VBUS
2	D-
3	D+
4	GND
5	Stda_SSRX-
6	Stda_SSRX+
7	GND_DRAIN
8	Stda_SSTX-
9	Stda_SSTX+
	ShellShield

产品图 PRODUCT CHART DWG		深圳市鑫风雷电子有限公司 Shenzhen xinfenglei Electronic Co., Ltd	
公差一览表 TOLERANCE UNLESS OTHERWISE SPECIFIED		单位 UNITS	MM
X	±0.30	X	±5°
X	±0.25	X	±2°
XX	±0.30	XX	±1°
XXX	±0.15	XXX	±0.5°
比例 SCALE		日期 DATE	2009/10/20
制图 DRAWING		审核 CHKD	王冠
产品料号 PRODUCT PART NO.		核准 APPD	雷永健
产品名称 PRODUCT NO.		角法 VIEW	11005-U3AM002-B
版本 VER			USB AM 3.0 90度 L=1.9 K脚 (有定位柱)
			A0