

1 2 3 4 5 6 7 8 9 10








ROHS

客户图

目錄
MAPX
A0

變更內容
MODIFICATION
NEW

日期
DATE
09-10-20

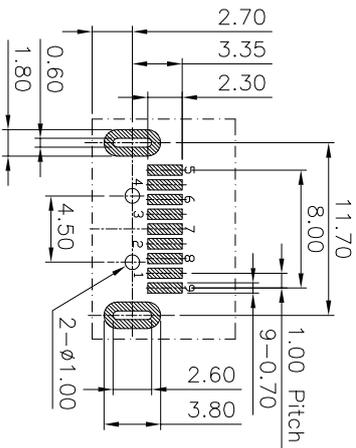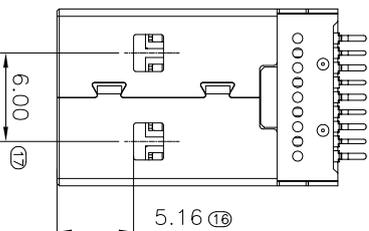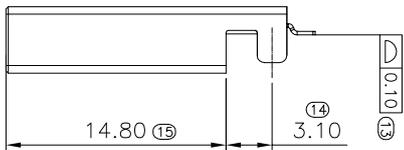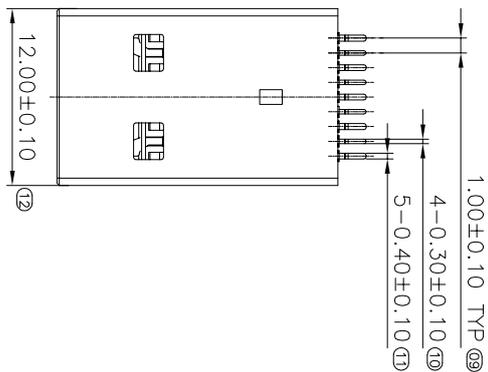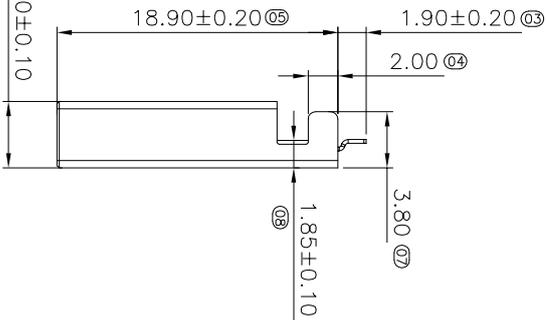

RECOMMENDED PCB LAYOUT(PCT T=1.60mm)
COMPONENT SIDE,±0.05mm

SPECIFICATIONS:
Contact current Rating:
1.8 Amperes for pin1&pin4,
0.25 Amperes other contacts
Dielectric Withstanding Voltage:AC 100V(RMS)
Insulation resistance:100Megohms Minimum.
Contact Resistance:
30mΩ Max for pin1&pin4
50mΩMax for other contacts
Mechanical Characteristics:
Mating Force:35 Newtons,Maximum
Unmating Force:10 Newtons,Minimum.
MATERIAL:
Housing: LCP+30%GF 94V-0 COLOR:BLUE
Contact: copper alloy(T=0.25mm)
Shell: SPCC
PLATING:
Contact: Au Plated on contact area
Tin Plated on solder area
Shell: Nickel underplating over all
Nickel Plated
operating Temperature:-55°to+85°

Pin	NUMERICAL SIGNAL NAME
1	VBUS
2	D-
3	D+
4	GND
5	Stda_SSRX-
6	Stda_SSRX+
7	GND_DRAIN
8	Stda_SSTX-
9	Stda_SSTX+
	ShellShield

产品图

PRODUCT CHART DWG

深圳市鑫风雷电子有限公司

公差一览表 TOLERANCE UNLESS OTHERWISE		单位 UNITS	制图 DRAWING	产品料号 PRODUCT PART NO.
X	±0.30	X'	王冠	11005-U3AM001-A
XX	±0.25	X''	雷永健	USB AM 3.0 SMT T=1.9
.XX	±0.30	XX'	雷永健	直脚 (有定位柱款)
.XXX	±0.15	XXX'	雷永健	角法
DATE	2009/10/20	SCALE	1:1	版本 VER
APPD		核推		A0