


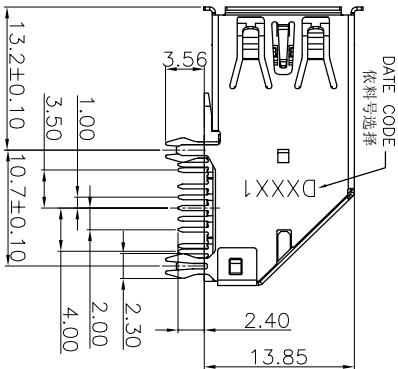

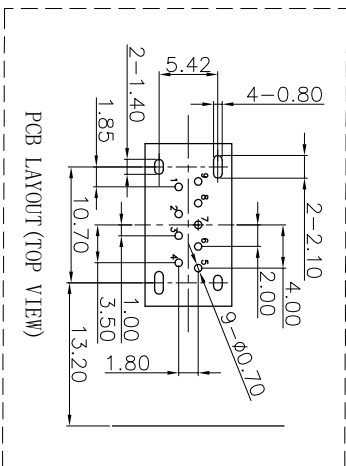




# RoHS Compliant

## 客户图



Pin Number	Signal Name	Pin Number	Signal Name
1	VBUS	5	SSRX-
2	D-	6	SSRX+
3	D+	7	GND
4	GND	8	SSTX-
Shell	Shield	9	SSRT+

ITEM	PART NAME	Material	QTY	REMARK
1	4P Semi-manufactured Good	Housing PBT/LDP	1	Black,Reddible U194V-0
2	5P Semi-manufactured Good	Contact Phosphor Bronze PBT/LDP	4	T=0.25 Picking Glu/7m
3	Manufactured Good	Contact Brass	1	Black,Reddible U194V-0
4	Shell	Stainless Steel	5	T=0.25 Picking Glu/7m
5			1	T=0.3

### 产品图

PRODUCT CHART DWG

#### 公差一览表

TOLERANCE UNLESS OTHERWISE	公差	单位 UNITS	比例 SCALE	日期 DATE	制图 DRAWTING	审核 CHKD	核准 APPD	产品料号 PRODUCT PART NO.	产品名称 PRODUCT NO.	角法 VIEW	版本 VER
X	±0.30	MM	1:1	2009/10/20	王冠	雷永健	雷永健	17002-U3AF014-X	USB3.0 A型侧插有边小鱼叉	⊕	A0
X	±0.25	X'	±2'								
.XX	±0.20	XX'	±1'								
.XXX	±0.15	XXX'	±0.5'								

## 深圳市鑫风雷电子有限公司

**SPECIFICATIONS:**  
 Contact current Rating:  
 1.8 Amperes for pin1&pin4.  
 0.25 Amperes other contacts  
 Dielectric Withstanding Voltage:AC  
 100V(RMS)  
 Insulation resistance:100Megohms Minimum.  
 Contact Resistance:  
 30mΩ Max for pin1&pin4  
 50mΩMax for other contacts  
 Mechanical Characteristics:  
 MATING FORCE:35 N Max  
 Extraction FORCE:10 N Min INITIAL; 8 N  
 Min AFTER TESTOperating  
 Temperature:-55 °C+85 °C2.FINISHED  
 CONTACTS: GOLD PLATED(SEE TABLE)  
 ON CONTACT AREA,80u"MIN. MATTE-TIN ON  
 SOLDERTALLS 50u" MIN. NICKEL  
 UNDERPLATING OVER ALL  
 SHELL: 50u" MIN. NICKEL  
 UNDERPLATING OVER ALL