
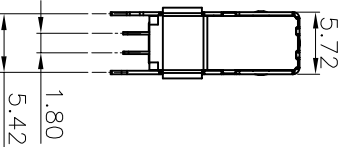
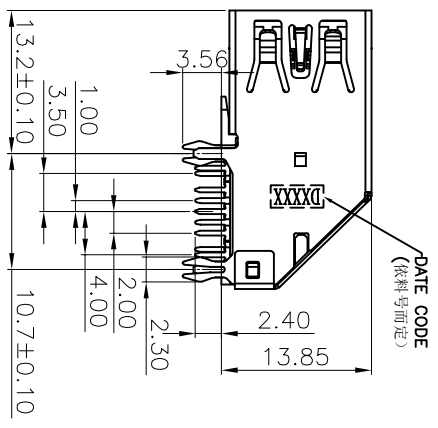
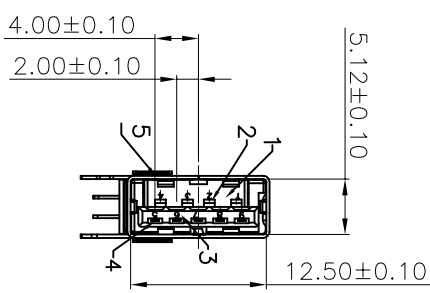
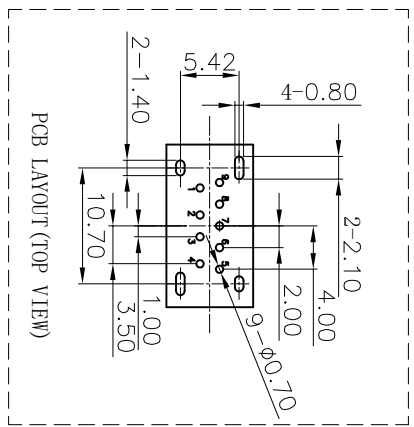

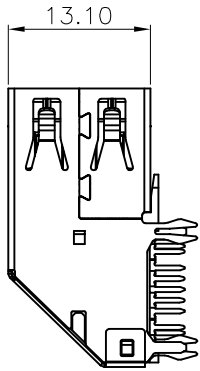


RoHS Compliant

客户图

目録 MAPX A0	変更内容 MODIFICATION NEW	日期 DATE 09-10-20
------------------	-----------------------------	------------------------



Pin Number	Signal Name	Pin Number	Signal Name
1	VBUS	5	SSRX-
2	D-	6	SSRX+
3	D+	7	GND
4	GND	8	SSTX-
Shield	Shield	9	SSRT+

ITEM	PART NAME	Material	QTY	REMARK
1	4P Semi-manufactured Good	Housing PBT/LDP	1	Black,Reddible U194V-0
2	5P Semi-manufactured Good	Contact Phosphor Bronze PBT/LDP	4	T=0.25 Picking Glu/In
3	Manufactured Good	Contact Brass	1	Black,Reddible U194V-0
4	Shell	Stainless Steel	5	T=0.25 Picking Glu/In
5			1	T=0.3

产品图

公差一览表
TOLERANCE UNLESS OTHERWISE SPECIFIED

公差	比例
X	±0.30
XX	±0.25
XXX	±0.15

深圳市鑫风雷电子有限公司
Shenzhen xinfenglei Electronic Co., Ltd

单位	比例	日期	制图	审核	核准	产品料号	产品名称	角法	版本
MM	1:1	2009/10/20	王冠	雷永健	雷永健	17002-U3AF007-A	USB3.0 A型侧插无边小鱼叉		A0

SPECIFICATIONS:
 Contact current Rating:
 1.8 Amperes for pin1&pin4.
 0.25 Amperes other contacts
 Dielectric Withstanding Voltage:AC
 100V(RMS)
 Insulation resistance:100Megohms Minimum.
 Contact Resistance:
 30mΩ Max for pin1&pin4
 50mΩMax for other contacts
Mechanical Characteristics:
 MATING FORCE:35 N Max
 Extraction FORCE:10 N Min INITIAL; 8 N
 Min AFTER TESToperating
 Temperature:-55 °C+85 °C2.FINISHED
 CONTACTS: GOLD PLATED(SEE TABLE)
 ON CONTACT AREA,80u"MIN. MATTE-TIN ON
 SOLDERTALLS 50u" MIN. NICKEL
 UNDERPLATING OVER ALL
 SHELL: 50u" MIN. NICKEL
 UNDERPLATING OVER ALL