









12345678910

Rohs 客户图

目錄 MAPX	變更內容 MODIFICATION	日期 DATE
A0	NEW	09-10-20



Specification:
1. Electrical Characteristics:
Contact Current Rating: 1.8 A
Dielectric Withstanding Voltage: AC 100V.
Insulation Resistance: 100 MΩ Min.
Contact Resistance:
30 mΩ (Max) initial for VBUS and GND contacts.
50 mΩ (Max) initial for all other contacts.
2. Mechanical Characteristics:
Insertion Force: 35N(3.57kgf) MAX
Extraction Force: 10N(1.02kgf) Min

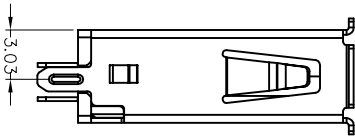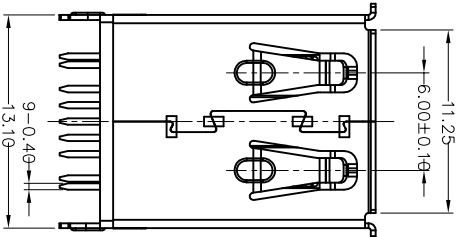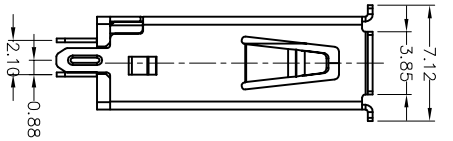

产品图

深圳市鑫风雷电子有限公司

公差一览表 TOLERANCE UNLESS OTHERWISE				单位 UNITS		制图 DRAWING		产品料号 PRODUCT PART NO.	
X	±0.30	X'	±5°	比例 SCALE	1:1	审核 CHKD	雷永健	产品名称 PRODUCT NO.	19001-U3AF002-A
.X	±0.25	.X'	±2°	日期 DATE	2009/10/20	核准 APPD	雷永健	角法 VIEW	USBS3.0 AF 180度直脚有边H=17.0
.XX	±0.30	.XX'	±1°						
.XXX	±0.15	.XXX'	±0.5°						