



ROHS 客户图

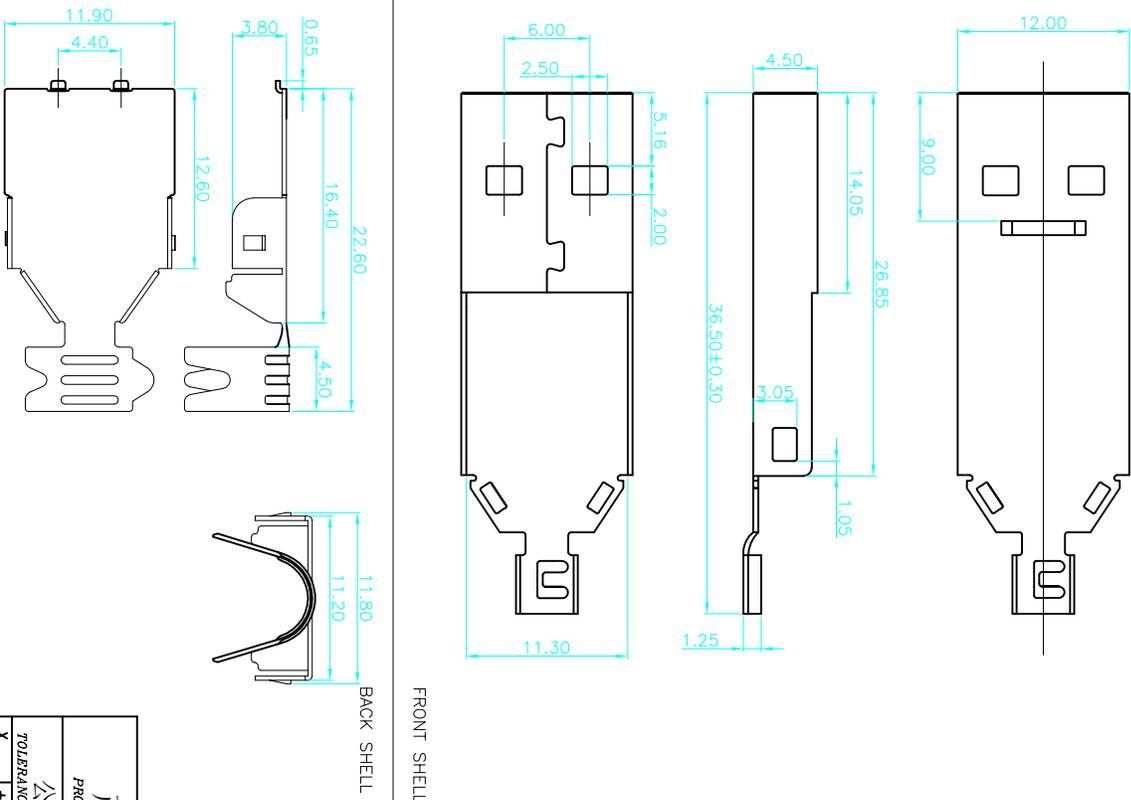

FRONT SHELL
BACK SHELL
CONNECTOR

NOTE:
*ELECTRICAL CHARACTERISTICS:
1.CONTACT RESISTANCE:30mΩ MAXIMUM
2.CONTACT CURRENT RATING:1.5A
3.DIELECTRIC WITHSTANDING VOLTAGE:500V R.M.S.
4.INSULATION RESISTANCE 1000 MEGOHMS MIN
*MECHANICAL CHARACTERISTICS:
1.MATING FORCE:3.57kg MAX
2.UNMATED FORCE:1.02kg MIN

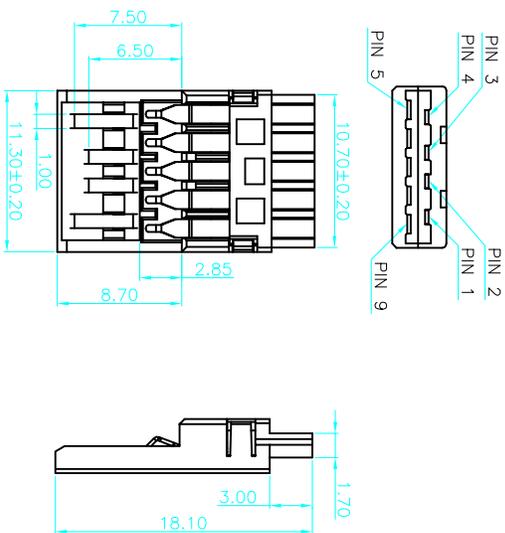

NO.	REV	REV DATE	REV BY	REV REASON
1	1			

PARTS LIST

深圳市鑫风雷电子有限公司

公差一览表 TOLERANCE UNLESS OTHERWISE		单位 UNITS		日期 DATE	
X	±0.30	X'	±5°	2009/10/20	核准
X	±0.25	X'	±2°		审核
.XX	±0.30	.XX'	±1°		制图
.XXX	±0.15	.XXX'	±0.5°		制图