

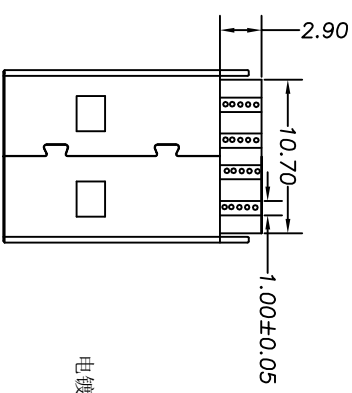
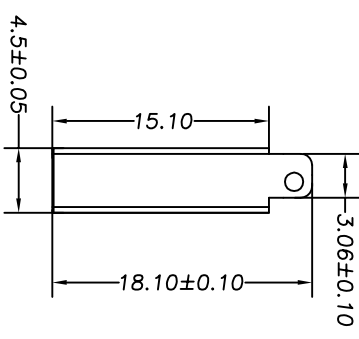




ROHS 客户图

目錄 MAPX A0	變更內容 MODIFICATION NEW	日期 DATE 09-10-20
------------------	-----------------------------	------------------------



USB-AM SOLDER TAIL
焊线式

特性: Specifications
电器 Electrical:
接触阻抗: Contact Resistance
30milliohms MAX

耐电压: Dielectric Withstanding Voltage
50V AC AT sea Level

绝缘阻抗: Insulation Resistance:
100MEGA ohms MIN

材料: Material:

塑胶: Housing:Hing Temperature Thermoplastics,
PBT料蓝色塑胶

端子: Contact:Copper Alloy 铜合金

铁壳: Shell:SPCC-SD 铁

电镀: Finish:

端子: Contact: Plated Gold in Mating Area;
Tin/Lead On Solder Tails

铁壳: Shell:
接触点镀金, 脚镀锡

Tin/Lead Plating 镀锡

深圳市鑫风雷电子有限公司

产品图 PRODUCT CHART DWG		单位 UNITS		制图 DRAWING		产品料号 PRODUCT PART NO.	
公差一览表 TOLERANCE UNLESS OTHERWISE		MM	王冠	200004-USBAM001-X			
X	±0.30	X'	±5°	审核 CHECK	雷永健	USB3.0 A公短体焊线一体式	
X	±0.25	X'	±2°	核准 APPD	雷永健	角法 VIEW	
.XX	±0.30	.XX'	±1°	日期 DATE	2009/10/20	版本 VER	
.XXX	±0.15	.XXX'	±0.5°			A0	

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO XINFENGLI ELECTRONIC CO.,LTD.AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION