



ROHS 客户图

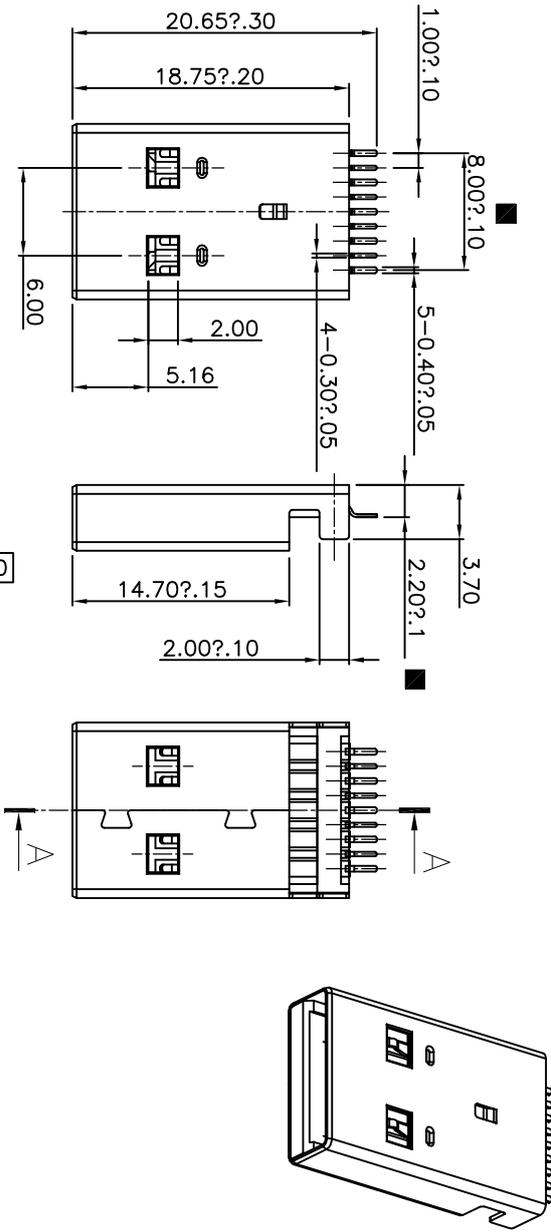

Notes:

- 1) Material:  
Insulator : Thermoplastic G.F. UL94V-0,BULE  
Contacts : Copper Alloy  
Shell : SPCC
- 2) Environmental :  
-55° to +105°
- 3) Electrical  
Voltage : 30VAC(R.M.S)  
Current Rating : 1.5 Ampere Min.  
Contact resistance : 30 Milliohms Max.  
Insulation resistance : 100 Megohms Min.  
Dielectric withstanding voltage : 500 VAC
- 4) Finish  
Shell : 50u" min. Nickel  
Contacts : 1~30u" min. Gold on mating area.  
100u" min. Tin on the tails.
- 5) QC Dimension Check

Critical  
Major  
Minor

SECTION "A-A"

RECOMMENDED P.C.B LAYOUT

3	SHELL	1	SPCC	SEE NOTE
2	TERMINAL	9	CS191-H	SEE NOTE
1	Molding-ASSY	1	LCP	UL94V-0; COLOR:BLUE
NO.	TITLE	Q'TY	MATERIAL	REMARK

产品图		公差一览表		单位		制图		产品料号	
PRODUCT CHART DWG		TOLERANCE UNLESS OTHERWISE		UNITS		DRAWING		PRODUCT PART NO.	
X	±0.30	X	±5°	MM	王冠	23001-U3AM001-A			
.XX	±0.25	.X	±2°	比例	雷永健	USB A/M 3.0 L=18.7 沉板2.2 外壳3.7			
.XXX	±0.15	.XX	±1°	SCALE	雷永健	无柱 锡脚1.9			
DATE		DATE		核准		角法		版本	
2009/10/20		2009/10/20		APPD		VIEW		A0	

深圳市鑫风雷电子有限公司