
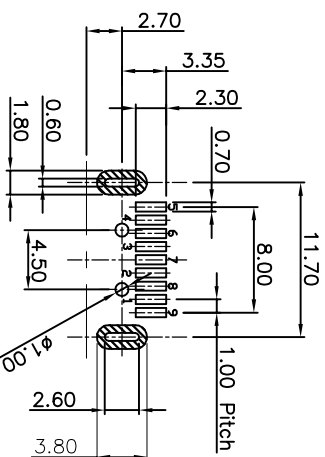

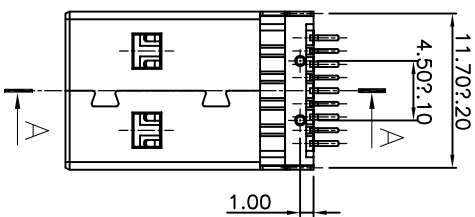
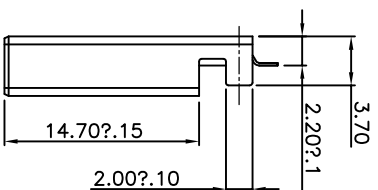


ROHS 客户图

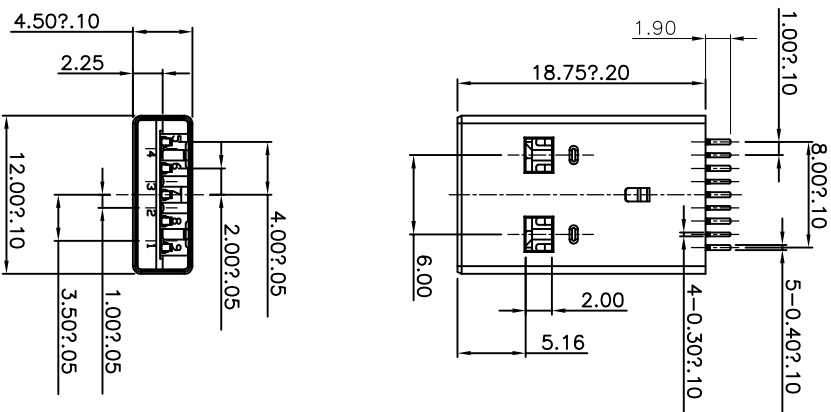

SECTION "A-A"

RECOMMEND PCB LAYOUT(TOLERANCE:±0.05)

- Notes:
- 1) Material:
Insulator : Thermoplastic G.F. UL94V-0,BULE
Contacts : Copper Alloy
Shell : SPCC
 - 2) Environmental :
-55# to +105#
 - 3) Electrical
Voltage : 30VAC(R.M.S)
Current Rating : 1.5 Amperes Min.
Contact resistance : 30 Milliohms Max.
Insulation resistance : 100 Megohms Min.
Dielectric withstanding voltage : 500 VAC
 - 4) Finish
Shell : 50u" min. Nickel
Contacts : 1~30u" min. Gold on mating area.
100u" min. Tin on the tails.

目錄 MAPX	變更內容 MODIFICATION	日期 DATE
A0	NEW	09-10-20

产品图

深圳市鑫风雷电子有限公司

公差一览表 TOLERANCE UNLESS OTHERWISE		单位 UNITS	制图 DRAWING	产品料号 PRODUCT PART NO.
X	±0.30	X'	王冠	23001-U3AM001-B
X	±0.25	X'	雷永健	USB AM 3.0 I=18.7 沉板.2 外壳.3.7
XX	±0.30	XX'	雷永健	有柱 锡脚.9
XXX	±0.15	XXX'	雷永健	角法
日期 DATE		比例 SCALE	核准 APPR	版本 VERS
2009/10/20		1:1	雷永健	A0