

RoHS 客户图

目錄
MAPX

设计内容
MODIFICATION



日期
DATE

A0


NEW

09-10-20

ASSEMBLY CAP

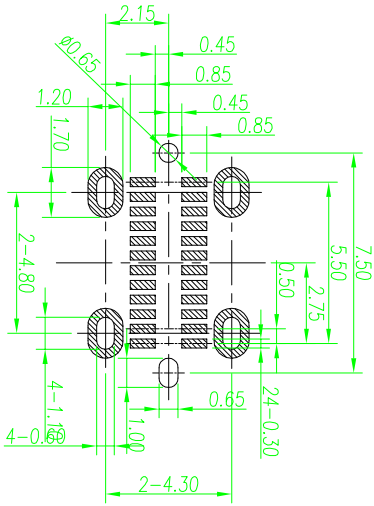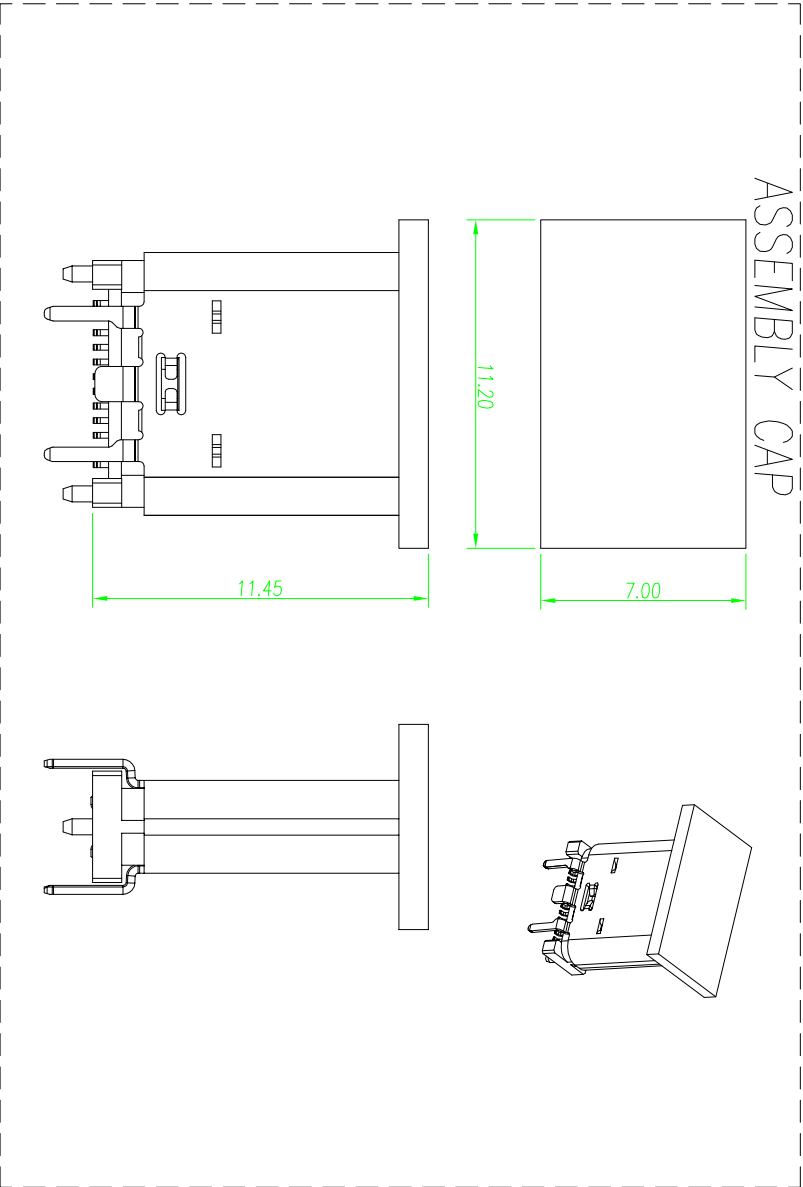

P.C.B LAYOUT VIEW
TOLERANCE ±0.05

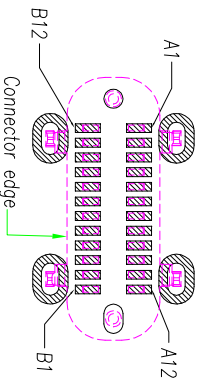

6	CAP	1 PCS	PLASTIC	UL94V-0
5	MID PLATE	1 PCS	STAINLESS STEEL	None
4	CONTACT 2	1 SET	COPPER ALLOY	CONTACT AREA : Au 1u" Min., Ni 30~80u"
3	CONTACT 1	1 SET	COPPER ALLOY	SOLDER AREA : Matte Tin 50u" Min., Ni 30~80u"
2	HOUSING	1 PCS	PLASTIC	UL94V-0
1	SHELL	1 PCS	STAINLESS STEEL	Ni 50~100u"
NO.	DESCRIPTION	QTY.	MATERIAL	FINISHED

PIN ASSIGNMENT												BLADE	SHELL
A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12		
GND	TX1+	TX1-	VBUS	CC1	D+	D-	SBU1	VBUS	RX2-	RX2+	GND		
GND	RX1+	RX1-	VBUS	SBU2	D-	D+	CC2	VBUS	TX2-	TX2+	GND		
B12	B11	B10	B9	B8	B7	B6	B5	B4	B3	B2	B1		

公差一览表 TOLERANCE UNLESS OTHERWISE SPECIFIED				产品图 PRODUCT CHART DWG				深圳市鑫风雷电子有限公司 Shenzhen xinfenglei Electronic Co., Ltd			
X	±0.30	X'	±5°	单位	MM	制图	王冠	产品料号	19009-UCAF025-A		
.X	±0.25	.X'	±2°	比例	1:1	审核	雷永健	产品名称	Type C 24+母座立式SMT H=10.5脚长1.65		
.XX	±0.30	.XX'	±1°	SCALE		核准	雷永健	PRODUCT NO.			
.XXX	±0.15	.XXX'	±0.5°	DATE	2009/10/20	批准	雷永健	角法		版本	A0
							Leiyongjian	VIEW			

