
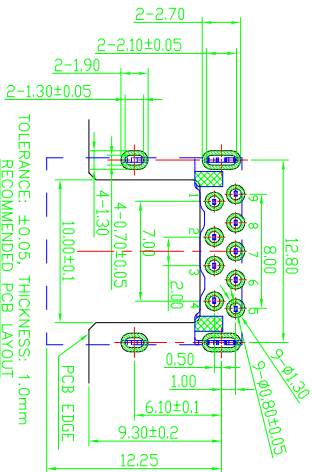



RoHS Compliant




客户图

目錄 MAPX	變更內容 MODIFICATION	日期 DATE
A0	NEW	09-10-20



Pin #	SIGNAL NAME	DESCRIPTION	PARTING SEQUENCE
1	VBUS	POWER	SECOND
2	D-	USB 2.0 DIFFERENTIAL PAIR	THIRD
3	D+	DIFFERENTIAL PAIR	THIRD
4	GND	GROUND FOR POWER RETURN	SECOND
5	SDA_SSRX-	SUPPRESSED RECEIVER DIFFERENTIAL PAIR	LAST
6	SDA_SSRX+	DIFFERENTIAL PAIR	
7	GND_BRAIN	GROUND FOR SIGNAL RETURN	
8	SDA_SSTX-	SUPPRESSED TRANSMITTER DIFFERENTIAL PAIR	
9	SDA_SSTX+	DIFFERENTIAL PAIR	
Shield	Shield	CONNECTOR METAL SHELL	FIRST

NOTE:
 1. MATERIAL:
 1.1 INSULATOR:HIGH TEMPERATURE PLASTIC UL 94 V-0-BLUE
 1.2 CONTACT: COPPER ALLOY (9-0-20mm)
 1.3 SOLDER: BRASS (7-0-30mm)
 2. ELECTRICAL CHARACTERISTICS:
 2.1 CONTACT RESISTANCE: 3mΩ Max
 2.2 CONTACT CURRENT RATING: 1.5A
 2.3 DIELECTRIC WITHSTANDING VOLTAGE: 500 V R.M.S.
 2.4 INSULATION RESISTANCE: 100 MEGOHMS Min.
 2.5 OPERATING TEMPERATURE: -40° C ~ 85° C
 3. MECHANICAL CHARACTERISTICS:
 3.1 MATING FORCE: 35 N Max
 3.2 IMMATED FORCE: 10 N Min INITIAL; 8 N Min AFTER TEST
 3.3 DURABILITY: 5,000 CYCLES
 4. PLATING:
 4.1 TERMINAL CONTACT: (SEE TAB) GOLD PLATING ALL OVER 50μ" MIN NICKEL AND 80μ" MIN TH ALL OVER 50μ" MIN NICKEL ON SQUARE AREA
 4.2 SOLDER: 80μ" MIN NICKEL ALL OVER



NO.	PART NAME	MATERIAL	DESCRIPTION
1	胶芯	HIGH TEMPERATURE PLASTIC	UL 94V-0
2	端子	COPPER ALLOY	GOLD/TIN PLATED
3	外壳	BRASS	NICKEL PLATED

产品图

深圳市鑫风雷电子有限公司

公差一览表		单位	MM	制图	王冠	产品料号	26015-U3AF004-A
TOLERANCE UNLESS OTHERWISE		UNITS		DRAWING		PRODUCT PART NO.	
X	±0.30	X'	±5'	审核	雷永健	产品名称	USB 3.0 AF 板上H=5.72 L=13.7
.XX	±0.30	.XX'	±2'	核准	雷永健	PRODUCT NO.	
.XXX	±0.15	.XXX'	±0.5'	日期		角法	
				DATE	2009/10/20	VIEW	
						版本	A0
						VER	