

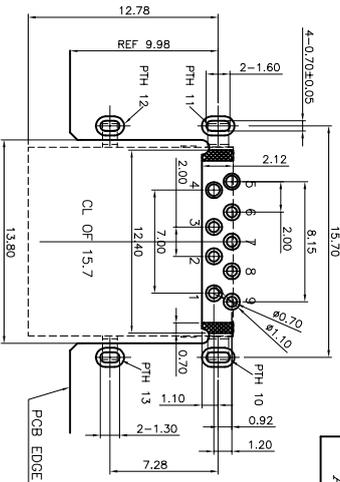


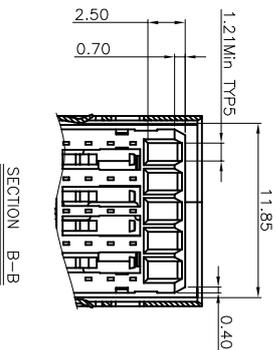
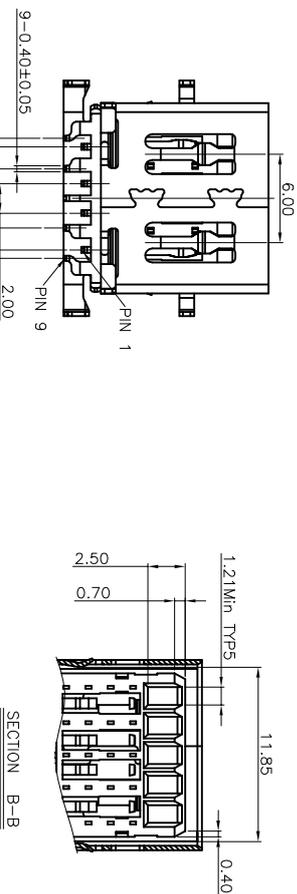

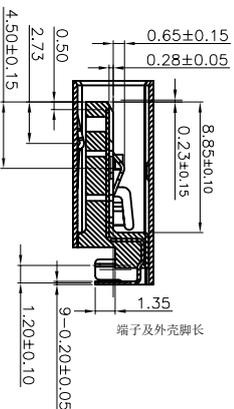


ROHS 客户图

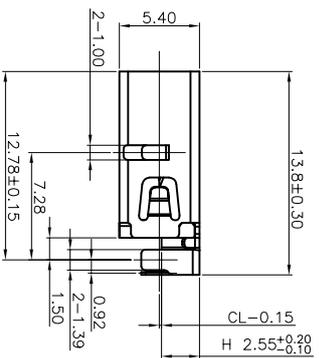

TOLERANCE: ± 0.05 , THICKNESS: 1.0~1.2mm
RECOMMENDED PCB LAYOUT
(TOP VIEW)
KEEP OUT AREA

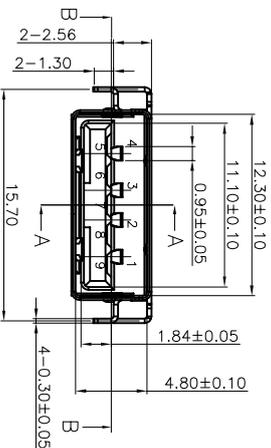

目次 MAPX A0	内容 MODIFICATION NEW	日期 DATE 09-10-20
------------------	---------------------------	------------------------



- NOTE:
- 1.1 INSULATOR: HIGH TEMPERATURE PLASTIC UL 94 V-0;
 - 1.2 CONTACT: COPPER ALLOY(T=0.2mm)
 - 1.3 SHELL: SUS201(T=0.30mm)
 2. ELECTRICAL CHARACTERISTICS:
 - 2.1 CONTACT RESISTANCE: 30m MAX.
 - 2.2 CONTACT CURRENT RATING: 1.5A
 - 2.3 DIELECTRIC WITHSTANDING VOLTAGE: 500 V R.M.S.
 - 2.4 INSULATION RESISTANCE: 100 MEGOHMS M
 - 2.5 OPERATING TEMPERATURE: -55°C~85°C
 - 2.6 RATE VOLTAGE: 30V DC
 3. MECHANICAL CHARACTERISTICS:
 - 3.1 MATING FORCE: 10 N Min INITIAL; 8 N Min AFTER TEST
 - 3.2 UNMATED FORCE: 35 N Max
 - 3.3 DURABILITY: 5,000 CYCLES
 4. PLATING
 - 4.1 TERMINAL CONTACT: GOLD PLATING ALL OVER 50μ" MIN NICKEL AND 80μ" MIN Matte Tin NICKEL IN SOLDER AREA (SEE TAB)
 - 4.2 SHELL: 50μ" MIN. NICKEL ALL OVER

Pin #	SIGNAL NAME	DESCRIPTION	MATING SEQUENCE
1	VBUS	POWER	SECOND
2	D-	USB 2.0 DIFFERENTIAL PAIR	THIRD
3	D+		
4	GND	GROUND FOR POWER RETURN	SECOND
5	Stda_SSRX-	SUPERSPEED RECEIVER DIFFERENTIAL PAIR	LAST
6	Stda_SSRX+		
7	GND_DRAIN	GROUND FOR SIGNAL RETURN	
8	Stda_SSTX-	SUPERSPEED TRANSMITTER DIFFERENTIAL PAIR	
9	Stda_SSTX+		
Shield	Shield	CONNECTOR METAL SHELL	FRIST



产品图 PRODUCT CHART DWG		深圳市鑫风雷电子有限公司 Shenzhen xinfenglei Electronic Co., Ltd	
公差一览表 TOLERANCE UNLESS OTHERWISE		单位 UNITS	MM
X	± 0.30	X	$\pm 5^\circ$
X	± 0.25	X	$\pm 2^\circ$
XX	± 0.30	XX	$\pm 1^\circ$
XXX	± 0.15	XXX	$\pm 0.5^\circ$
比例 SCALE		日期 DATE	2009/10/20
制图 DRAWING		审核 CHKD	核准 APPD
产品料号 PRODUCT PART NO.		产品名称 PRODUCT NAME	联系方式 CONTACT
25005-U3AF012-A		USB 3.0 A 90度 反向流板2.55 L=13.8 平口	mailto:sale1@xfll.com www.xfll.com.com

ROHS 客户图

目 录 MAPX A0	内 容 MODIFICATION NEW	日 期 DATE 09-10-20
-------------------	----------------------------	-------------------------

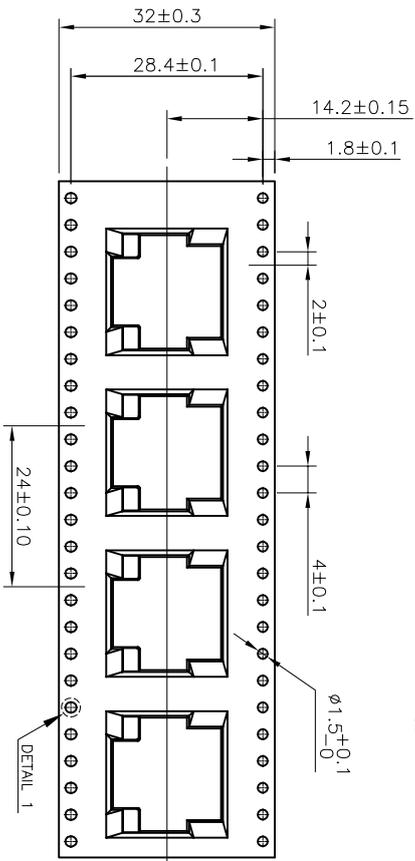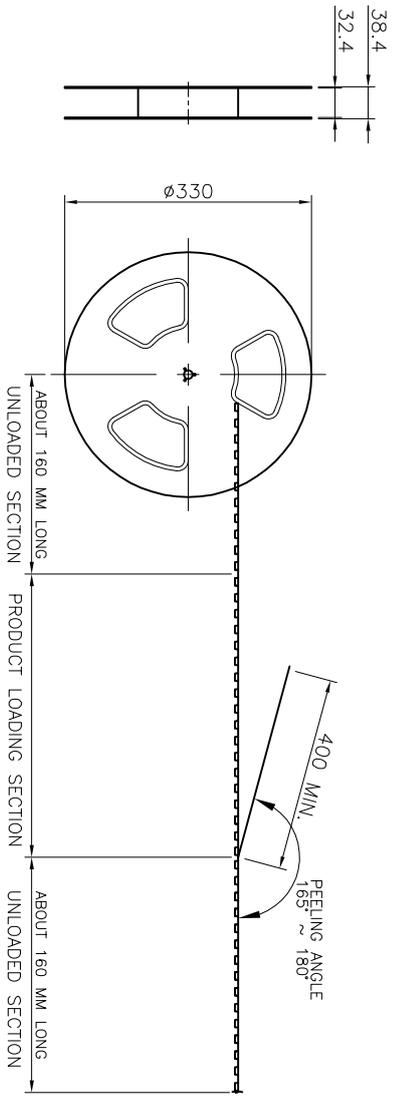

- NOTE:
- MATERIAL:
BOX: FIBREBOARD, CORRUGATED, DOUBLE WALL
TAPE: POLYSTYRENES, HEAT-RESISTANT TEMPERATURE: 120°C, BLACK COLOR.
REEL: POLYSTYRENES, HEAT-RESISTANT TEMPERATURE: 70°C, BLUE COLOR.
BAG: POLYETHYLENE, HEAT-RESISTANT TEMPERATURE: 100°C.
 - PEELING STRENGTH: 0.1 ~ 1.3 N (10 ~ 130 GRAMS)
 - PEELING SPEED: 300 mm/min.
 - EACH BAG SHALL BE INCLUDED DESICCANT.

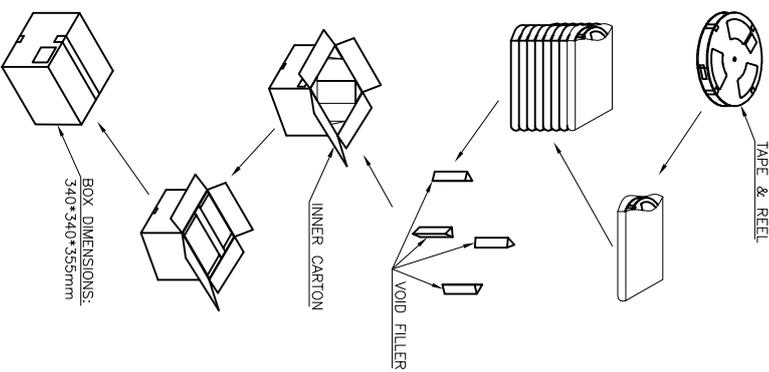

产品图

PRODUCT CHART DWG

公差一览表

TOLERANCE UNLESS OTHERWISE	公差	UNIT	制图	审核	产品料号
X	±0.30	X'	±5'	王冠	25005-U3AF012-A
X	±0.25	X'	±2'	雷永健	产品名称
XX	±0.30	XX'	±1'	雷永健	PRODUCT NO.
XXX	±0.15	XXX'	±0.5'	雷永健	联系方式

深圳市鑫风雷电子有限公司
Shenzhen xinfenglei Electronic Co., Ltd

450	9	4050 PCS	-- KG	-- KG
PCS/ REEL	REELS/ CARTON	QUANTITY	GROSS WEIGHT	NET WEIGHT