由 Autodesk 教育版产品制作

RoHS 客户图

目錄 MAPX	设变内容 MODIFICATION	日期 DATE
A0	NEW	09-10-20

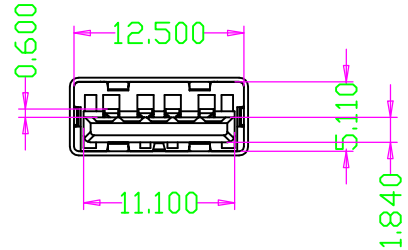

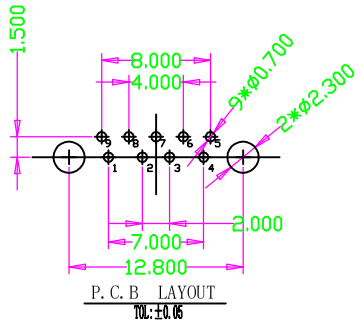

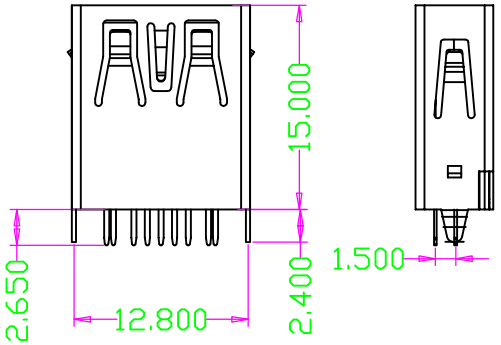

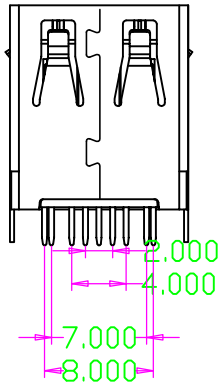



NOTE:
1. MATERIAL:
   1.1 INSULATOR:HIGH TEMPERATURE PLASTIC
   1.2 CONTACT:BRONZE,
   1.3 SHELL:BRASS,
2. ELECTRICAL CHARACTERISTICS;
   2.1 CONTACTRESISTANCE:30mΩ MAXIMUM
   2.2 CONTACT CURRENT RATING:1.5A
   2.3 DIELECTRIC WITHSTANDING VOLTAGE:100 V AC R.M.S.
   2.4 INSULATION RESISTANCE 100 MEGOHMS MIN
   2.5 OPERATING TEMPEROTURE:-40° C ～ 85° C
3 MECHANICAL CHARACTERISTICS:
   3.1 MATING FORCE:3.57kgf MAX
   3.2 UNMATED FORCE:0.82kgf MIN AFTER TEST
   3.3 DURABILITY MANDATORY:1,500 CYCLES
   3.4 Salt Spray: 24 hours

4. PLATING
   4.1 TERMINAL:
      50u″ MIN NICKEL ALL OVER
      80u″MIN Tin ON SOLDER AREA
      (1~30)u″Au ON CONTACT AREA
   4.2 SHELL:50u″MIN.NICEL ALL OVER

Pin NUMBER	SIGNAL NAME
1	VBUS
2	D-
3	D+
4	GND
5	StdA_SSRX-
6	StdA_SSRX+
7	GND_DRAIN
8	StdA_SSTX-
9	StdA_SSTX+
Shell	Shield

产品图 PRODUCT CHART DWG

公差一览表 TOLERANCE UNLESS OTHERWISE

X.	±0.30	X°.	±5°
.X	±0.25	.X°	±2°
.XX	±0.30	.XX°	±1°
.XXX	±0.15	.XXX°	±0.5°

深圳市鑫风雷电子有限公司

单位 UNITS	MM	制图 DRAWING	王 冠	产品料号 PRODUCT PART NO.	26015-U3AF014-D		
比例 SCALE	1:1	审核 CHKD	雷永健	产品名称 PRODUCT NO.	USB 3.0 AF 180度直脚无边 H=15.0		
日期 DATE	2009/10/20	核准 APPD	雷永健	角法 VIEW		版本 VER	A0

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO XINFENGLEI ELECTRONIC CO.,LTD.AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

由 Autodesk 教育版产品制作