
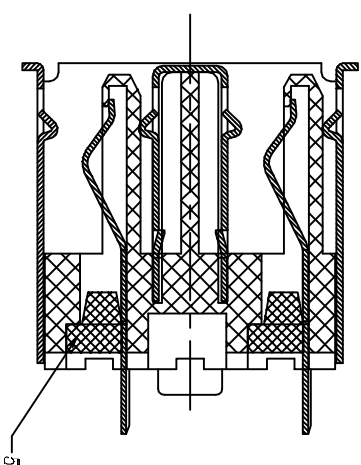
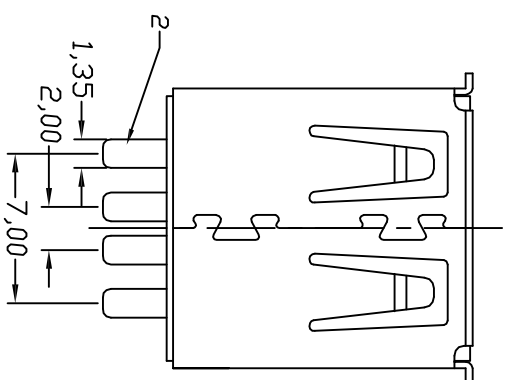
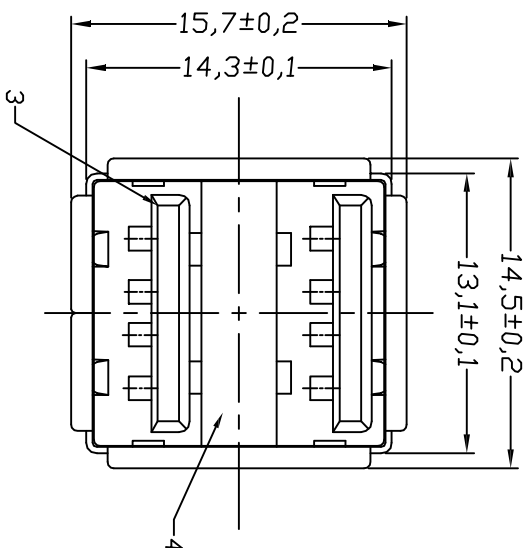


1 2 3 4 5 6 7 8 9 10

RoHS

客户图

目錄 MAPX A0	變更內容 MODIFICATION NEW	日期 DATE 09-10-20
------------------	-----------------------------	------------------------

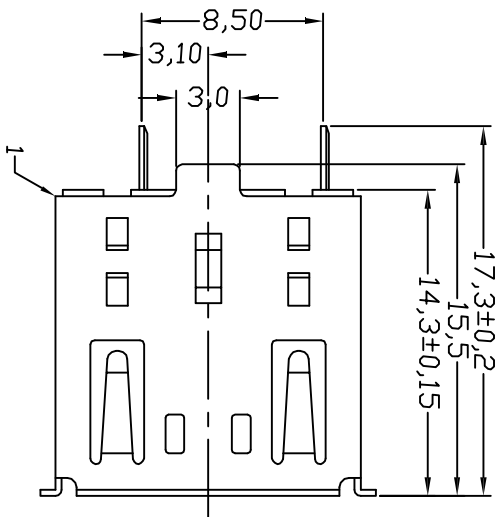

SPECIFICATIONS:
Contact current Rating: 1ampere,
DIELECTRIC Withstanding Voltage: AC 750V
at sea level
Insulation resistance: 1000Megohms
Minimum.
Contact Resistance: 30mΩ Max
operating Temperature: -55° to +85°

MECHANICAL CHARACTERISTICS:
Mating Force: 3.57Kg. Maximum
Umating Force: 1.02kg. Minimum.

5	后盖	1	PBT 30MG		COLOR: BLACK/WHITE,...
4	中夹片	1	黄铜	NICKEL PLATING	
3	胶碗	1	PBT 30MG		COLOR: BLACK/WHITE,...
2	端子	8	C5191H	NICKEL PLATING OVER ALL SURFACES	GOLD/1, 3, 5, 10, 15, 30u"
1	外壳	1	黄铜	NICKEL PLATING	

产品图 PRODUCT CHART DWG		公差一览表 TOLERANCE UNLESS OTHERWISE SPECIFIED		单位 UNITS		制图 DRAWING		产品料号 PRODUCT PART NO.	
X	±0.30	X	±5°	MM	1:1	王冠	26006-U2AF001-A		
.XX	±0.25	.X	±2°	审核 CHECK	雷永健	雷永健	产品名称 PRODUCT NAME		
.XXX	±0.15	.XXX	±1.5°	日期 DATE	2009/10/20	雷永健	A母180度双层焊线有边L=14.3MM		
				核准 APPROVED			角法 VIEW	版本 VER	A0

深圳市鑫风雷电子有限公司