

RoHS

客户图

目錄
MAPX设 变 内 容
MODIFICATION日 期
DATE

A0

NEW

09-10-20

规格说明: Specifications:

电气特性: Electrical:

- 额定电流: Current Rating
1.5A/contact terminal
- 额定电压: Voltage Rating
30V DC
- 接触电阻: Contact Resistance
30 milliohms MAX
- 耐电压: Dielectric Withstanding Voltage:
500 V AC AT Sea Level
- 绝缘电阻: Insulation Resistance:
1000MΩ ohms MIN

物理性能: Mechanical:

- 插拔力: Connector Mate and Unmate Force
Mate force: 3.57kgf (MAX)
Unmate force: 1.02kgf (MIN)
1.2kgf (MIN)
- 端子保持力: Terminal Retention

原材料: Material:


- 塑胶: Housing:
Hing Temperature Thermoplastics,
PBT White/Black

- 端子: Contact: Copper Alloy C2880

- 外壳: Shell: Copper Alloy C2880/SPCC

电镀: Finish:

- 端子: Contact: Plated Gold in Mating Area:
Tin Sn Solder Tails
- 外壳: Shell:
Nickel Plating

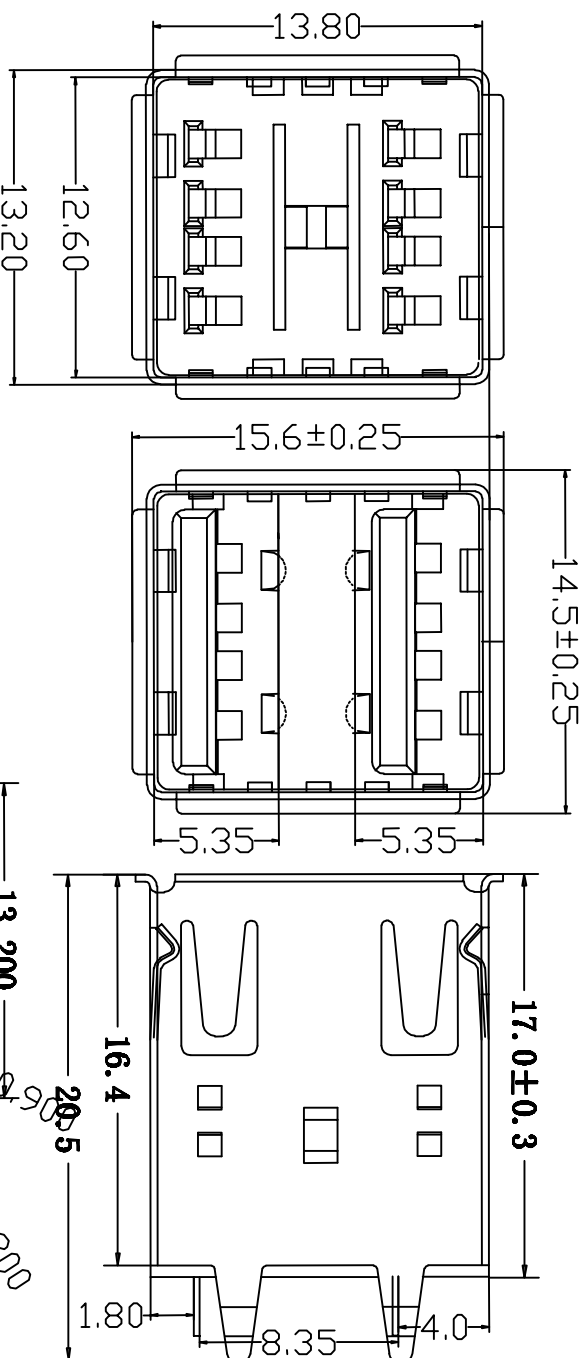

RECOMMENDED P.C.B PATTERN LAY OUT

产品图

PRODUCT CHART DWG

公差一览表

TOLERANCE UNLESS OTHERWISE

单位 UNITS	制图 DRAWING	审核 CHECK	核准 APPD
MM	王冠	雷永健	雷永健
比例 SCALE	1:1	产品名称 PRODUCT NO.	版本 VER
.XX ±0.30	.XX' ±5'	USB AP 180度双层弯脚有边H=17.0	A0
.X ±0.25	.X' ±2'		
.XX ±0.30	.XX' ±1'		
.XXX ±0.15	.XXX' ±0.5'		
DATE	2009/10/20	角法 VIEW	

深圳市鑫风雷电子有限公司
Shenzhen xinfenglei Electronic Co., Ltd