
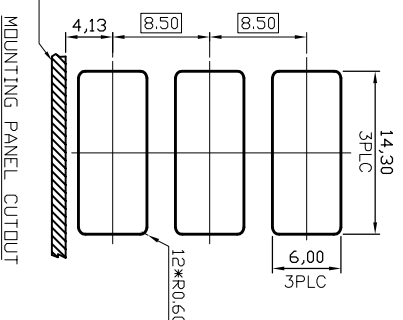
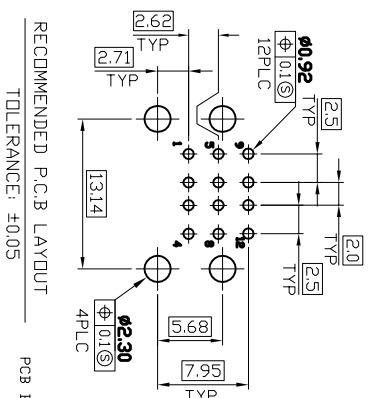








Rohs

密戸

目録 MAPX	設定内容 MODIFICATION	日期 DATE
A0	NEW	09-10-20



- NOTES:
1. MATERIAL:
 - 1.1 HOUSING: PA6T+30% G/F,COLOR:BLACK, UL94V-0;
 - 1.2 CONTACTS: PHOSPHOR BRONZE
 - 1.3 SHELL : SEE TABLE
 - 1.4 ISOLATED: SK7
 - 1.5 REAR SHELL :SPCC
 2. FINISH:
 - 2.1 CONTACT:
GOLD FLASH PLATING ON CONTACT AREA.
100u" MIN. BRIGHT-TIN PLATING ON SOLDER TAIL AREA.50u" MIN. NICKEL UNDERPLATING OVERALL,
 - 2.2 SHELL:
50u" MIN NICKEL PLATED.
 - 2.3 ISOLATED:SHELL: 100u" MIN NICKEL PLATED
 - 2.4 REAR SHELL: 100u" MIN NICKEL PLATED.
 3. ELECTRICAL CHARACTERISTICS:
 - CURRENT RATING: 1ampere Maximum
VOLTAGE: 30V AC,
CONTACT RETENTION FORCE:0.7KG/Minimum,
CONTACT RESISTANCE: 30 MILLIOHMS MAXIMUM,
INSULATION RESISTANCE: 1000MEGOHMS MINIMUM,
DIELECTRIC WITHSTANDING VOLTAGE: 750V AC AT SEELEVEL.
TEMPERATURE: -55°C~85°C .
 4. MECHANICAL:
MATING FORCE: 3.57kgf(35N) MAX
UNMATING FORCE: 1.02kgf(10N) MIN

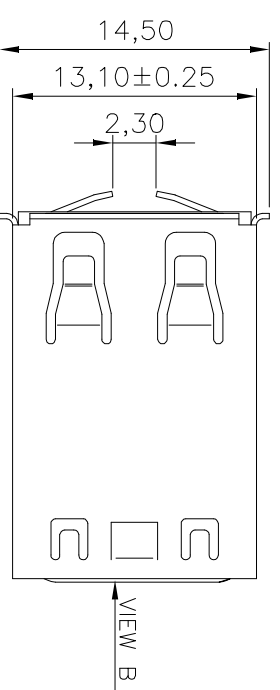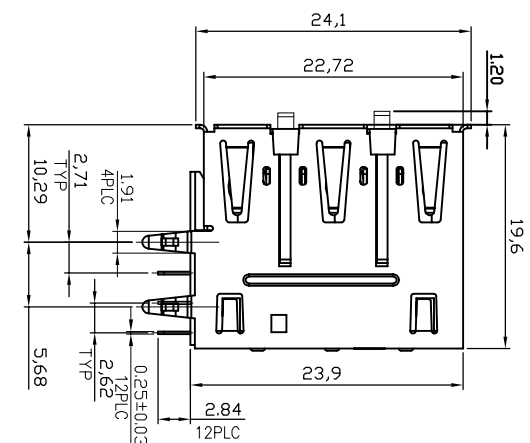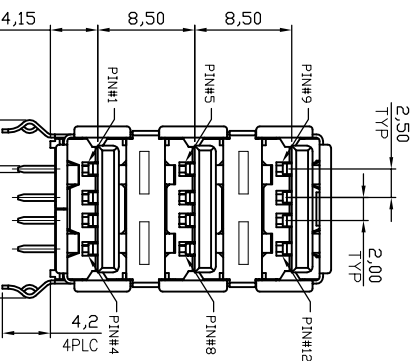

产品图									
PRODUCT CHART DWG									
公差一览表 TOLERANCE UNLESS OTHERWISE									
X.	±0.30	X.	±5°	单位	MM	制图	王冠	产品料号	00710-U2AF003-X
.X	±0.25	.X	±2°	比例	1:1	审核	雷永健	产品名称	USB2.0 三层 双内弹
.XX	±0.30	.XX	±1°	Scale		核准	雷永健	角法	
.XXX	±0.15	.XXX	±0.5°	日期	2009/10/20	核准	雷永健	版本	AO
				DATE		APPD		VER	