
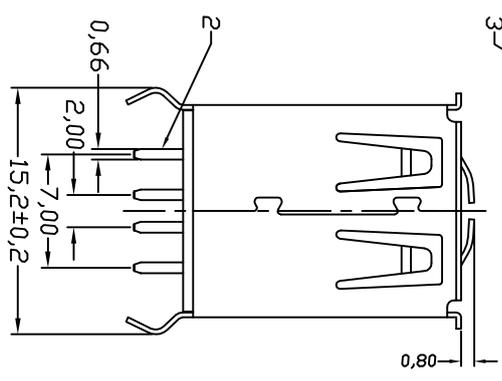
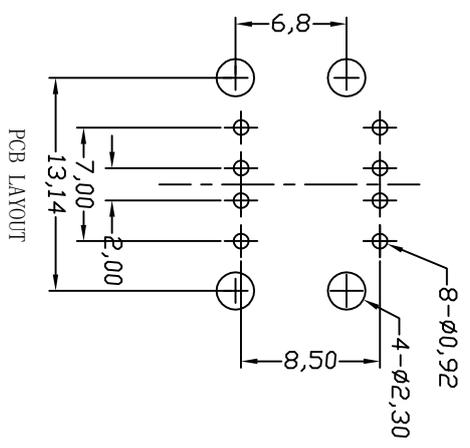
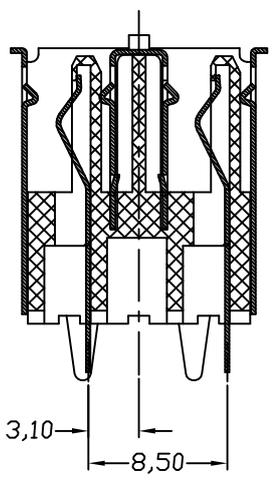
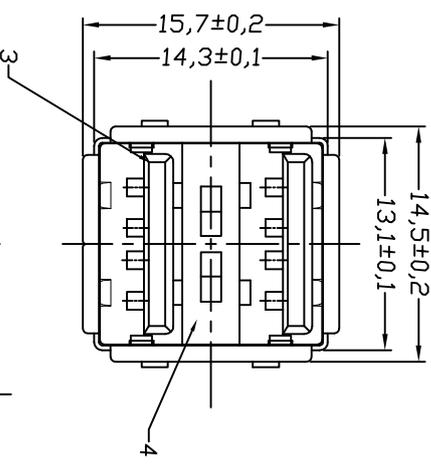


RoHS

客户图

目錄 MAPX A0	變更內容 MODIFICATION NEW	日期 DATE 09-10-20
------------------	-----------------------------	------------------------

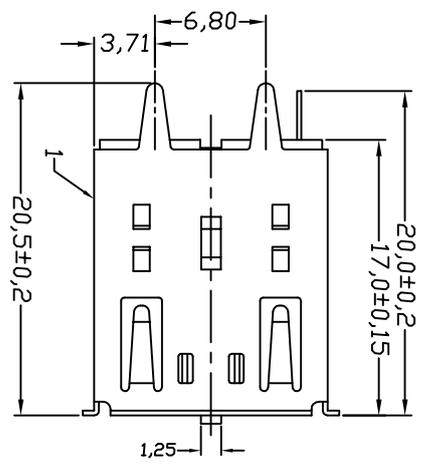

- Specifications:
- 1 Current rating: 1 A Max.
 - 1.2 Dielectric withstanding voltage: 500 V(ac) for 1 minute.
 - 1.3 Contact resistance: 30mΩ Max.
 - 1.4 Insulation resistance: 1000MΩ Min at DC 500V
 - 1.5 Total mating force: 3.5 Kgf Max.
 - 1.6 Total unmating force: 1.0 Kgf Min.
 - 1.7 Temperature range: -45°C ~ +105°C.

4	中夾片	1	黃銅	NICKEL PLATING	
3	膠蕊	1	PBT 30%G		COLOR: BLACK/WHITE...
2	端子	8	C5191H	NICKEL PLATED OVER ALL SURFACES	GOLD 1,3,5,10,15,30u"
1	外殼	1	黃銅/Fe	NICKEL PLATING	

深圳市鑫风雷电子有限公司

公差一览表 TOLERANCE UNLESS OTHERWISE SPECIFIED	
X	±0.30
X	±0.25
XX	±0.30
XXX	±0.15

单位 UNITS	MM
比例 SCALE	1:1
日期 DATE	2009/10/20
制图 DRAWING	王冠
审核 CHECK	雷永健
核准 APPROVE	雷永健
产品料号 PRODUCT PART NO.	26006-U2AF016-X
产品名称 PRODUCT NO.	
角法 VIEW	
版本 VER	A0

此圖此產品之商標及專利權均為本公司之財產，未經本公司書面許可，不得複製、傳播或用於其他用途。 XINFENGLEI ELECTRONIC CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION