


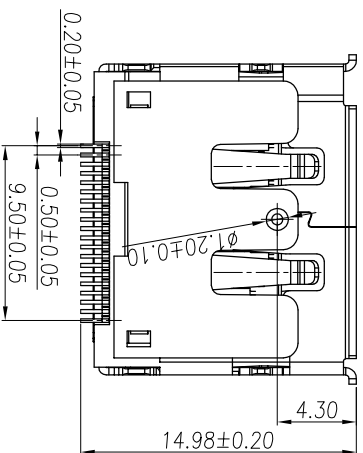
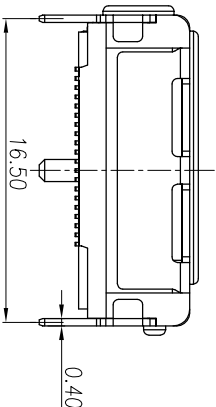
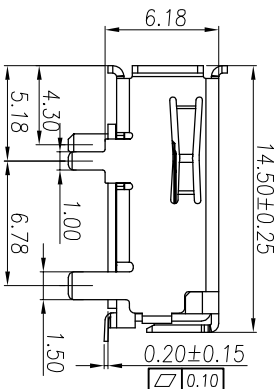
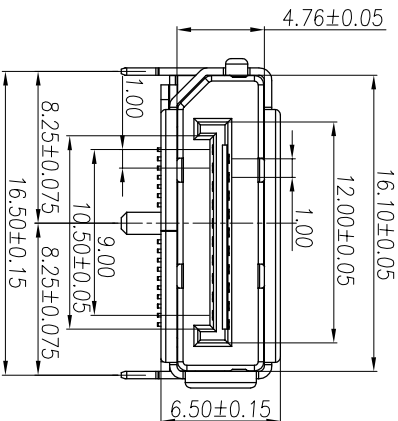
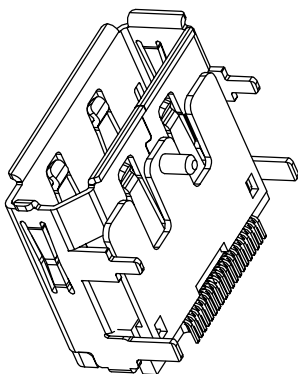


RoHS 客户图

目錄 MAPX	設定內容 MODIFICATION	日期 DATE
A0	NEW	09-10-20

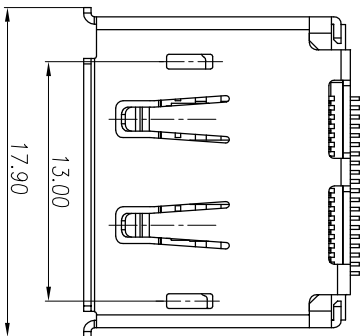

- NOTE:
- 1.MATERIAL:
- 1.1 HOUSING: LCP, UL 94V-0 COLOR: BLACK.
- 1.2 CONTACT: C2680, T=0.20mm.
- 1.3 SHIELD: C2680, T=0.40mm.
- 1.4 COVER: LCP,UL 94V-0
- 2.FINISH:
- 2.1 CONTACT: GOLD(1U²) PLATING IN CONTACT AREA, 50U²MIN TIN PLATED IN SOLDER AREA,50U² MIN. NICKEL UNDERPLATED OVERALL.
- 2.2 SHIELD: 50U² MIN. NICKEL UNDERPLATED OVERALL.
- 3.MECHANICAL CHARACTERISTICS
- 3.1 RATING CURRENT: 0.5A
- 3.2 RATING VOLTAGE: 40V
- 3.3 CONTACT RESISTANCE: 40 mΩ MAX
- 3.4 INSULATION RESISTANCE a. UNMATED: 100MΩ MIN AT 500 VDC. b. MATED: 10M OHMS MIN AT 150 VDC
- 3.5 DIELECTRIC WITHSTANDING VOLTAGE: 500V AC/1MINUTE
- 3.6 DURABILITY: 10000 CYCLES.

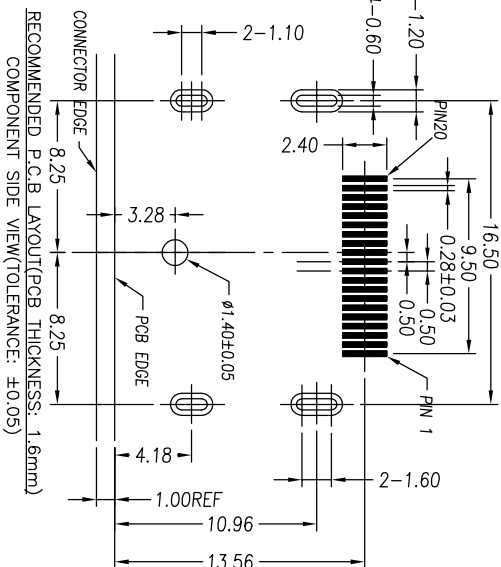

产品图

PRODUCT CHART DWG

公差一览表

公差一览表	单位 UNITS	MM	制图 DRAWING	产品料号 PRODUCT PART NO.	26022-DPFO001-X
TOLERANCE UNLESS OTHERWISE					
X ±0.30	X'	±5'	审核 CHKD	产品名称 PRODUCT NO.	DisplayPort 20PIN 母板四脚插针 有卷边有柱
.X ±0.25	.X'	±2'	核准 Appd	联系方式 Mailbox/web	mailto:sale@xfll.com.com www.xfll.com.com
.XX ±0.20	.XX'	±1'			
.XXX ±0.15	.XXX'	±0.5'			
DATE	2009/10/20				

深圳市鑫风雷电子有限公司

Shenzhen xinfenglei Electronics Co., Ltd