
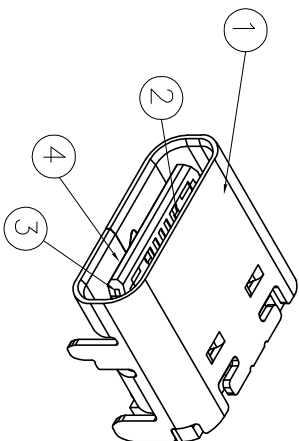





1 2 3 4 5 6 7 8 9 10

Rohs 客户图



| 目錄<br>MAPX | 設定內容<br>MODIFICATION | 日期<br>DATE |
|------------|----------------------|------------|
| A0         | NEW                  | 09-10-20   |

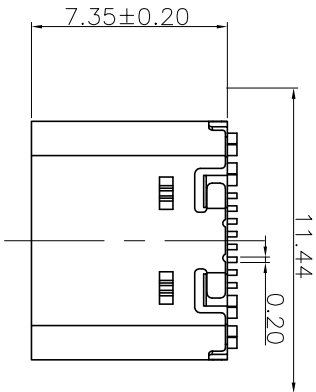

- NOTES:
- SPECIFICATION:
- CURRENT RATING: 10.0A MAX
  - VOLTAGE: 100 VAC
  - TEMPERATURE RANGE: -40 °C ~ 85 °C
  - CONTACT RESISTANCE: 40 MILLIONHM MAX
  - INSULATION RESISTANCE: 100 MEGOHMS MIN.
  - INSERTION FORCE : 5N~20N
  - UNMATING FORCE: 8N~20N
  - DURABILITY: 10,000 CYCLES

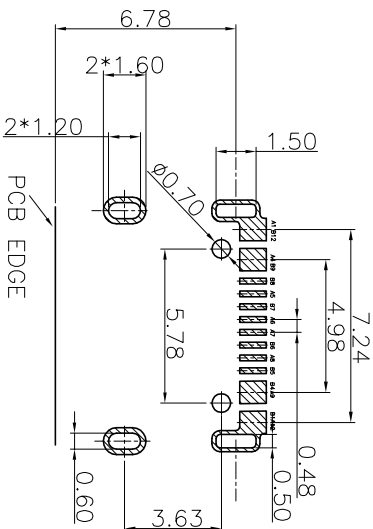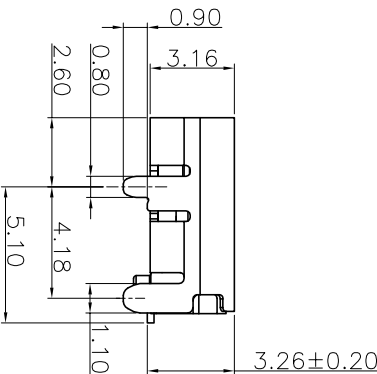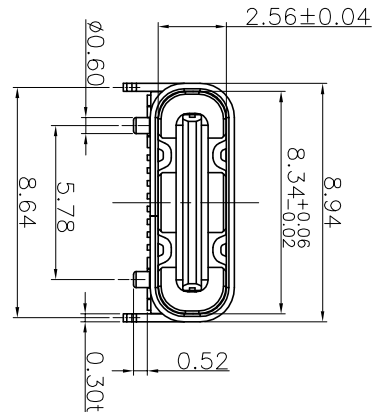

RECOMMENDED P.C.B. LAYOUT  
TOLERANCE UNSPECIFIED ±0.05mm

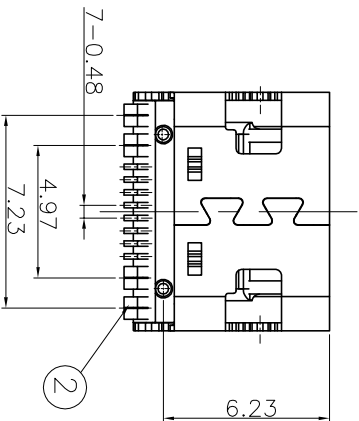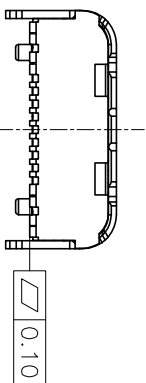

| NO. | DESCRIPTION     | MATERIAL        | COLOR | REMARK      |
|-----|-----------------|-----------------|-------|-------------|
| 4   | TYPE C MD       | HIGH TEMP       | BLACK | UL 94V-0    |
| 3   | CENTER PIECE    | STAINLESS STEEL | —     | NO Plated   |
| 2   | TYPE C TERMINAL | COPPER ALLOY    | —     | Gold Plated |
| 1   | SHELL           | COPPER ALLOY    | —     | Ni Plated   |

| 产品图<br>PRODUCT CHART DWG            |       |      |       | 深圳市鑫风雷电子有限公司<br>Shenzhen xinfenglei Electronics Co., Ltd |                |                         |                                                   |
|-------------------------------------|-------|------|-------|----------------------------------------------------------|----------------|-------------------------|---------------------------------------------------|
| 公差一览表<br>TOLERANCE UNLESS OTHERWISE |       |      |       | 单位<br>UNITS                                              | 制图<br>DRAWING  | 产品料号<br>PRODUCT PART NO |                                                   |
| X                                   | ±0.30 | X'   | ±5°   | MM                                                       | 王冠<br>Wangguan | 00702-UCAF001-X         |                                                   |
| X                                   | ±0.25 | X'   | ±2°   | 1:1                                                      | 审核<br>CHD      | 雷永健<br>Lei Yongjian     | Type C 16p母座板上SWT大电流10A                           |
| XX                                  | ±0.20 | XX'  | ±1°   | SCALE                                                    | 核准<br>Appd     | 雷永健<br>Lei Yongjian     | 联系方式<br>Mailbox: sale@xfll.com, www.xfll.com, com |
| XXX                                 | ±0.15 | XXX' | ±0.5° | DATE                                                     | 2009/10/20     | 雷永健<br>Lei Yongjian     | 2009/10/20                                        |