

1

2

3

4

5

6

7



8

9






10

Rohs

客户图

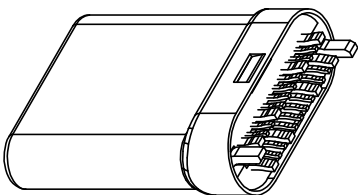

- 1.ELECTRICAL:
CURRENT:10A
CONTACT RESISTANCE:40 MILLIOHMS MAX
DIELECTRIC WITHSTANDING VOLTAGE: 200V AC
INSULATION RESISTANCE:100 MEGOHMS MIN
- 2.MECHANICAL:
MATING FORCE:6-20N
WITHDRAWAL FORCE:5-20N
DURIBILITY:10000 CYCLES
- 3.ENVIRONMENTAL:
TEMPERATURE RANGE -40℃~105℃
SALT TESTING:48 HOURS

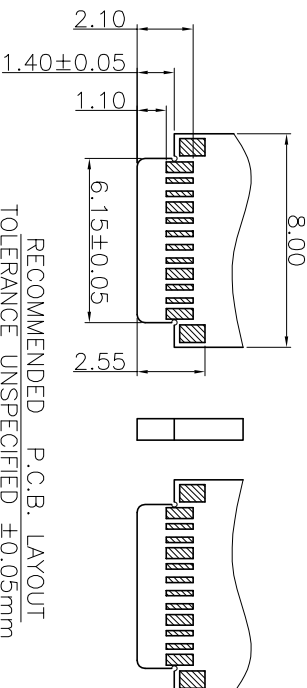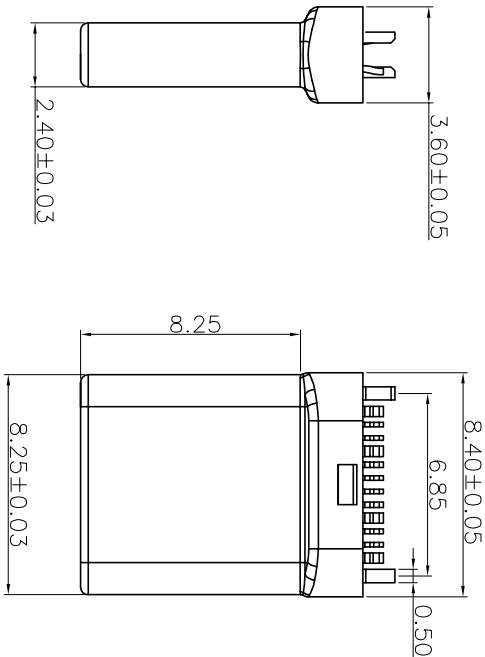

NO.	DESCRIPTION	MATERIAL	COLOR	REMARK
7				
6	HOUSING	HIGH TEMP	BLACK	UL 94V-0
5	TYPE C MD	HIGH TEMP	BLACK	UL 94V-0
4	LACTH	STAINLESS STEEL	—	SN Plated
3	TYPE C TERMINAL2	COPPER ALLOY	—	Gold Plated
2	TYPE C TERMINAL1	COPPER ALLOY	—	Gold Plated
1	SHELL	COPPER ALLOY	—	Ni Plated

产品图				深圳市鑫风雷电子有限公司			
PRODUCT CHART DWG				Shenzhen xinfenglei Electronics Co., Ltd			
公差一览表				单位	MM	制图	王冠
TOLERANCE UNLESS OTHERWISE				UNITS		DRAWING	Wongguan
X	±0.30	X'	±5°	比例	1:1	审核	雷永健
X	±0.25	X'	±2°	SCALE		CHD	Leiyoungjian
.XX	±0.20	.XX'	±1°	日期	2009/10/20	核准	雷永健
.XXX	±0.15	.XXX'	±0.5°	DATE		Appd	Leiyoungjian
				产品料号			
				00702-UCAM008-X			
				产品名称			
				Type C 24pin 公头插针 6脚夹板 0.8寸带板大电流10A			
				联系方式			
				mailbox: sale@xfl.com.com			
				www.xfl.com.com			