

1

2

3

4

5

6

7





8

9

10

Rohs


客户图

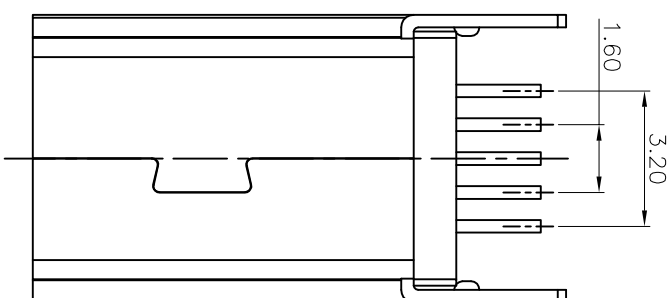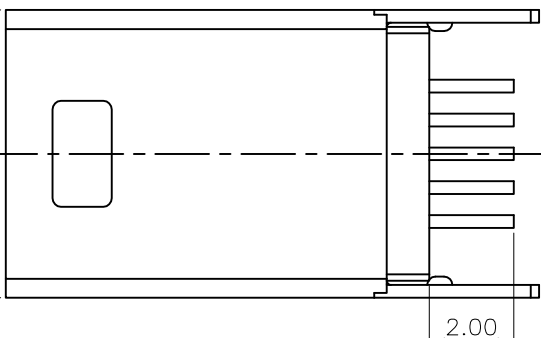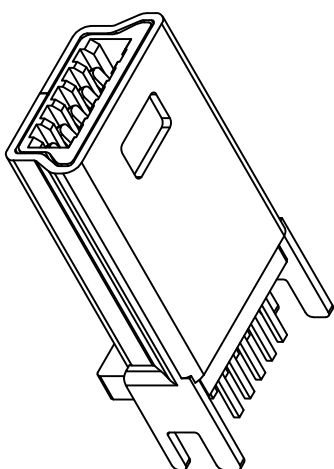

- NOTE:
1. ELECTRICAL CHARACTERISTICS
 - 1-1. VOLTAGE RATING:30V AC
 - 1-2. CURRENT RATING:1.0A
 - 1-3. CONTACT RESISTANCE: 50 milliohms MAX.
 - 1-4. INSULATION RESISTANCE: 100 Megohms MIN.
 - 1-5. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC
- FOR 1 MINUTE.
2. MECHANICAL CHARACTERISTICS
 - 2-1. RETENTION FORCE:MIN.300gf/PIN
 - 2-2. DURIBILITY: 10000CYCLES
 3. SALT SPRAY: SEE TABLE
 4. OPERATING TEMPERATURE:-40℃~85℃
 5. ROHS 2002/95/EC COMPLANT.
 6. CRITICAL DIMENSIONS : ▽

TABLE:

ITEM	P/N	NOTE	SALT SPRAY
1	1031002GR059	铁壳镀镍	24H
2	1031002GR061	铁壳镀金	24H
3	1031002GR063	铜壳镀镍	48H

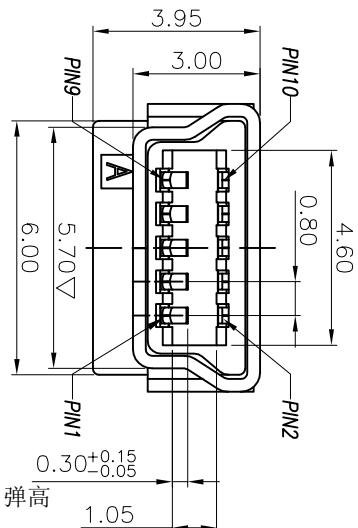

C	SHELL	1	SEE TABLE	SEE TABLE
B	CONTACT	10	COPPER ALLOY	Gold Flash On Contact Area Tin plated on Solder tail All over Nickel Plated .
A	HOUSING	1	THERMOPLASTIC U94-V0	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

产品图				深圳市鑫风雷电子有限公司			
PRODUCT CHART DWG				Shenzhen xinfenglei Electronics Co., Ltd			
公差一览表				单位	制图	王冠	产品料号
TOLERANCE UNLESS OTHERWISE				UNITS	DRAWING	Wangguang	PRODUCT PART NO
X	±0.30	X'	±5°	比例	审核	雷永健	产品名称
.XX	±0.25	.X'	±2°	SCALE	CHD	Lei Yongjian	PRODUCT NO.
.XXX	±0.20	.XX'	±1°	日期	核准	雷永健	联系方式
	±0.15	.XXX'	±0.5°	DATE	Appd	Lei Yongjian	Mailbox/web
				2009/10/20			mailbox: sale1@xfll.com.com
							www. xfll.com. com