

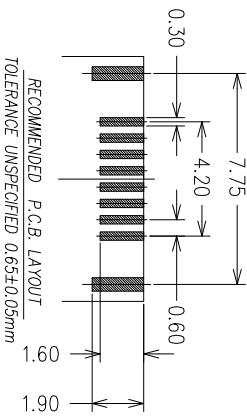
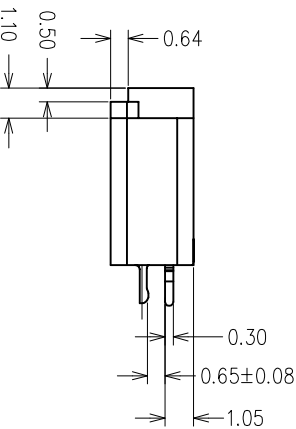



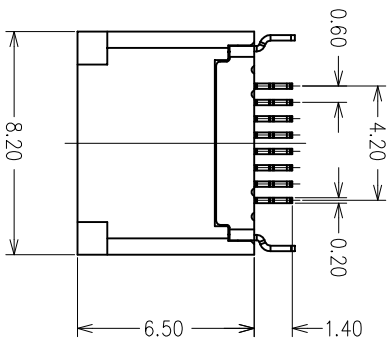
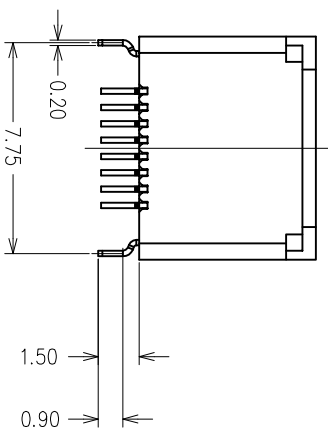


RoHS 客户图

目錄 MAPX	設定內容 MODIFICATION	日期 DATE
A0	NEW	09-10-20



- SPECIFICATION
1. ELECTRICAL CHARACTERISTICS:
- 1-1. VOLTAGE&CURRENT RATING:DC 30V MAX&1A
 - 1-2. CONTACT RESISTANCE: 30mΩ MAX INITIAL.
 - 1-3. INSULATION RESISTANCE: 500MΩ MIN FOR VOLTAGE 250VDC.
 - 1-4. DIELECTRIC WITHSTAND: 100V AC for 1 MIN/UTE
 - 1-5. OPERATING TEMPERATURE: -25℃~+85℃
2. MECHANICAL CHARACTERISTICS:
- 2-1. LIFE TEST :10,000 CYCLES



产品图

公差一览表

公差一览表				单位				比例				日期				核准				联系方式			
TOLERANCE UNLESS OTHERWISE				UNITS				SCALE				DATE				APPROD				MAILBOX			
X	±0.30	X'	±5'	MM				1:1				2009/10/20				Lei Yong Jian				mailbox: sale1@xficom.com			
X	±0.25	X'	±2'																				
.XX	±0.20	.XX'	±1'																				
.XXX	±0.15	.XXX'	±0.5'																				

深圳市鑫风雷电子有限公司
Shenzhen xinfenglei Electronics Co., Ltd