


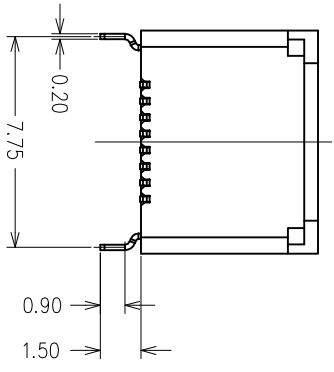

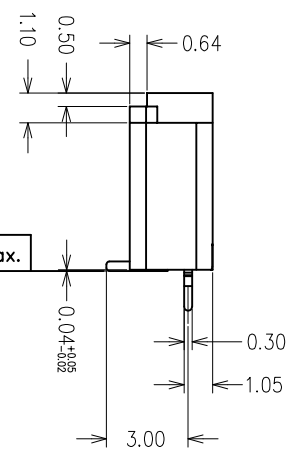
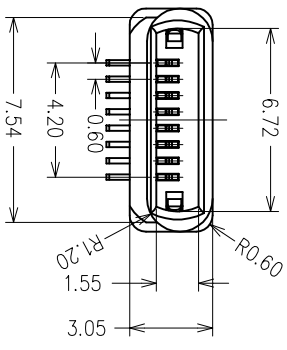
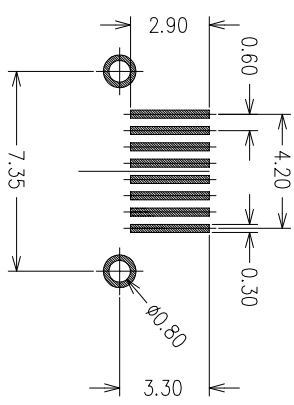




RoHS 客户图

目錄 MAPX A0	變更內容 MODIFICATION NEW	日期 DATE 09-10-20
------------------	-----------------------------	------------------------



RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED 0.65±0.05mm

SPECIFICATION

1. ELECTRICAL CHARACTERISTICS:

1-1. VOLTAGE & CURRENT RATINGS: DC 30V MAX X14
1-2. OPERATING TEMPERATURE: -25°C ~ +85°C
1-3. INSULATION RESISTANCE:
500MΩ MIN FOR VOLTAGE 250VDC.

1-5. OPERATING TEMPERATURE: -25°C ~ +85°C

2. MECHANICAL CHARACTERISTICS:

2-1. LIFE TEST : 10,000 CYCLES

产品图

PRODUCT CHART DWG

公差一览表

TOLERANCE UNLESS OTHERWISE	UNIT
X ±0.30	MM
.X ±0.25	MM
.XX ±0.20	MM
.XXX ±0.15	MM

深圳市鑫风雷电子有限公司

Shenzhen xinfenglei Electronics Co., Ltd

单位 UNITS	MM	比例 SCALE	1:1	日期 DATE	2009/10/20	制图 DRAWING	王冠 Wangguan	产品料号 PRODUCT PART NO.	23010-IPF0001-X
审核 CHKD		比例 SCALE		日期 DATE		审核 CHKD	雷永健 Lei Yongjian	产品名称 PRODUCT NO.	
批准 APPD		比例 SCALE		日期 DATE		批准 APPD	雷永健 Lei Yongjian	联系方式 CONTACT INFO	