
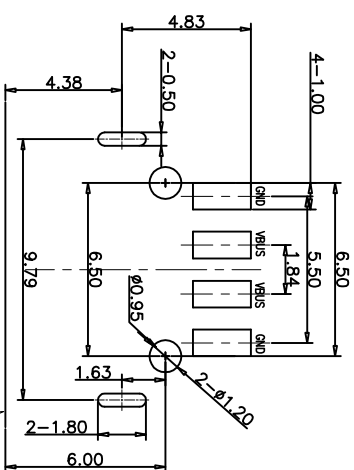
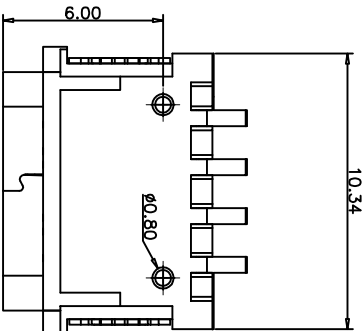

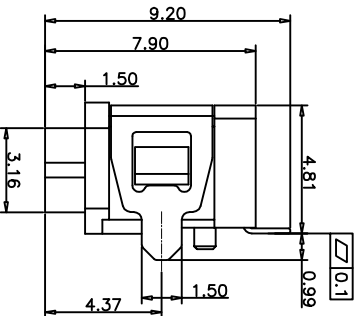

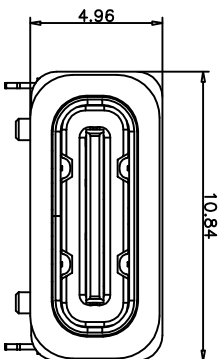
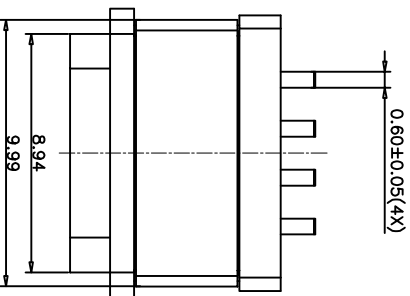


# ROHS 客户图

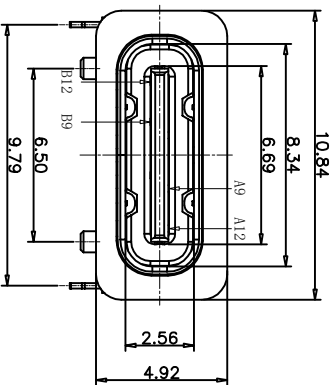

RECOMMEND P.C.B LAYOUT(COMPONENT SIDE)  
TOLERANCE FOR PCB LAYOUT IS ±0.05

**NOTES:**

- SPECIFICATION:**
- 1.CURRENT RATING: 3.0A MAX
  - 2.VOLTAGE: 100 VAC
  - 3.TEMPERATURE RANGE: -30°C~+85°C
  - 4.CONTACT RESISTANCE: 40 MILLIONHM MAX
  - 5.INSULATION RESISTANCE: 100 MEGOHMS MIN
  - 6.INSERTION FORCE: 5N~20N
  - 7.UNMATING FORCE: 8N-20N
  - 8.DURABILITY: 10000 CYCLES
  - 9.WATER PROOFNESS: THIS PRODUCT IS BASED ON IPX7.

**PIN ASSIGNMENT:**

PIN NO	A1&B12	A4&B9	A9&B4	A12&B1
SIGNAL NAME	GND	VBUS	VBUS	GND
PCB PAD NO.				

TABLE:

NO	PART	Q'TY	Material
1	SHELL	1	STAINLESS STEEL, NI PLATED
2	CONTACT	6	COPPER STEEL, TIN/AU/NI PLATED
3	MID PLATE	1	STAINLESS STEEL, NO PLATING
4	IMD HOUSING	1	HIGH TEMPERATURE RESISTANT PLASTIC BLACK UL94 V-0
5	2MD HOUSING	1	HIGH TEMPERATURE RESISTANT PLASTIC BLACK UL94 V-0
6	SHIELDING PLATE	1	STAINLESS STEEL, NI PLATED

**产品图**

PRODUCT CHART DWG

深圳市鑫风雷电子有限公司  
Shenzhen xinfenglei Electronics Co., Ltd

公差一览表		单位		比例		日期	
TOLERANCE UNLESS OTHERWISE	UNIT	SCALE	DATE	DRAWING	DATE	APPRO	DATE
X	±0.30	X'	±5'	审核	2009/10/20	王冠	2009/10/20
X	±0.25	X'	±2'	审核		雷永健	
XX	±0.20	XX'	±1'	核准		雷永健	
XXX	±0.15	XXX'	±0.5'	核准		雷永健	

加防水圈示意图