








1 ROHS

2 客户图

7 目錄
MAPX
A0


8 變更內容
MODIFICATION
NEW

10 日期
DATE
09-10-20

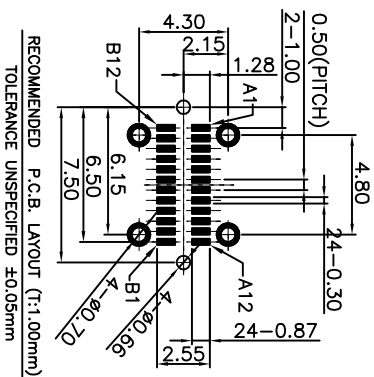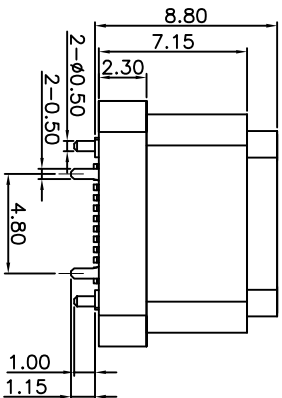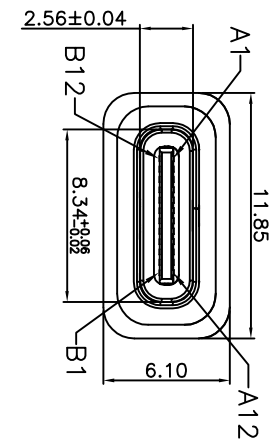

建议胶圈尺寸

- NOTES:
- SPECIFICATION:
1. CURRENT RATING: 3.0A MAX
 2. DIELECTRIC WITHSTAND VOLTAGE: 100VAC
 3. TEMPERATURE RANGE: -30 °C ~ 85 °C
 4. CONTACT RESISTANCE: 40 MILLIONHM MAX
 5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
 6. INSERTION FORCE : 5N~20N
 7. UNMATING FORCE: 8N~20N
 8. DURABILITY: 10,000 CYCLES



PIN NUMBER	SIGNAL NAME	PIN NUMBER	SIGNAL NAME
A1	GND	B12	SSRXp1
A2	SSTXp1	B11	SSRXn1
A3	SSTXn1	B10	SSRXn1
A4	VBUS	B9	VBUS
A5	CC1	B8	SBUS
A6	Dp1	B7	Dn2
A7	Dn1	B6	Dp2
A8	SBUS1	B5	CC2
A9	VBUS	B4	VBUS
A10	SSRXn2	B3	SSTXn2
A11	SSRXp2	B2	SSTXp2
A12	GND	B1	GND

产品图

深圳市鑫风雷电子有限公司
Shenzhen xinfenglei Electronic Co., Ltd

公差一览表
TOLERANCE UNLESS OTHERWISE SPECIFIED

公差	单位
±0.30	MM
±0.25	MM
±0.30	MM
±0.15	MM

单位	比例	日期	制图	审核	产品料号	产品名称	产品方式
UNITS	SCALE	DATE	DRAWING	CHD	00208-UCAR014-X	Type C 24P 绝缘立式SMT 防水 H=8.8 1167	mailbox: sale1@xfll.com, www: xfll.com, com
MM	1:1	2009/10/20	王冠	雷永健			
			雷永健	雷永健			
			核推	核推			

NO.	DESCRIPTION	MATERIAL	REMARKS	QTY
6	胶壳	硅胶	BLACK	1PCS
5	SHELL	STAINLESS STEEL	NI Plated	1PCS
4	SHIELDING PLATE	STAINLESS STEEL	NI Plated	1PCS
3	CONTACT	COPPER ALLOY	Au/NI Plated	1SET
2	SHELL HOUSING	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
1	HOUSING	HIGH TEMPERATURE PLASTIC	BLACK	1PCS