

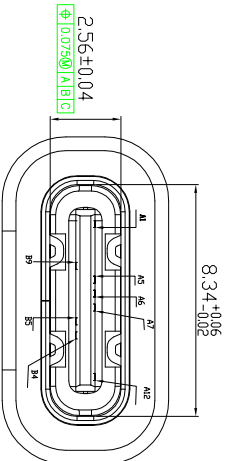
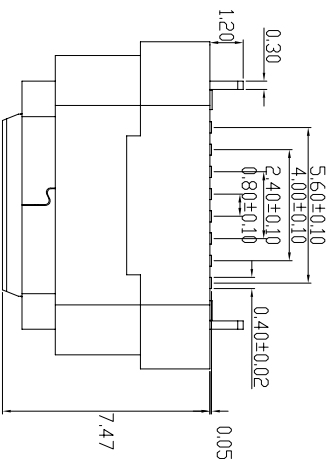
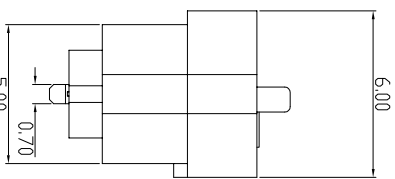
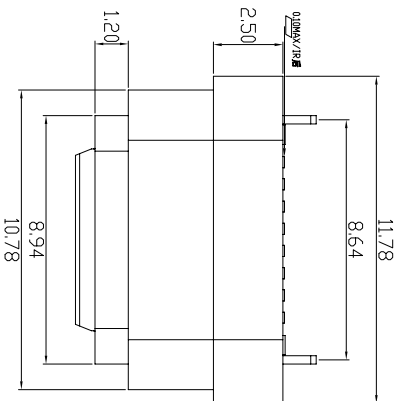
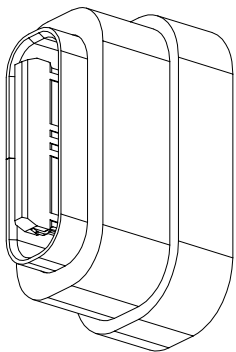


# RoHS 客户图



目錄 MAPX	變更內容 MODIFICATION	日期 DATE
A0	NEW	09-10-20

**NOTE:**

**1. MATERIAL:**

- 1.1 INSULATOR: HIGH TEMPERATURE PLASTIC UL 94 V-0; Black Color
- 1.2 CONTACT: C7025 (T=0.20mm)
- 1.3 SHELL: STAINLESS STEEL (T=0.30mm)
- 1.4 MID PLATE: STAINLESS STEEL (T=0.15mm)

**2. ELECTRICAL CHARACTERISTICS:**

- 2.1 CONTACT RESISTANCE: 40mΩ Max FOR INITIAL. 10mΩ CHANGE AFTER TEST. MEASURE AT 20mV, 100mA.
- 2.2 CONTACT CURRENT RATING: 5A FOR COLLECTIVELY POWER SUPPLY PIN(PIN1, A4, A9, A12, B1, B4, B9, B12); 1.25A FOR VCONN PIN; 0.25A FOR OTHER SIGNAL PIN.
- 2.3 DIELECTRIC WITHSTANDING VOLTAGE: 100V AC R.M.S.

**2.4 INSULATION RESISTANCE 100MΩ Min**

**2.5 OPERATING TEMPERATURE: -40° C ~ 85° C**

**3 MECHANICAL CHARACTERISTICS:**

- 3.1 MATING FORCE: 5~20 N.
- 3.2 UNMATED FORCE: 8~20N INITIAL TEST; 6~20N DURABILITY AFTER TEST
- 3.3 DURABILITY: 10,000 CYCLES

**4. PLATING**

- 4.1 TERMINAL CONTACT: Au 3u' PLATING ON CONTACT AREA; TIN 50u' Min TING ON SOLDER TAIL, SN 80u' Min UNDERPLATING OVERALL
- 4.2 SHELL: 50u' Min. NICKEL ALL OVER,
- 4.3 MID PLATE: 50u' Min. NICKEL ALL OVER,

## 产品图

PRODUCT CHART DWG









### 公差一览表

NO	DESCRIPTION	MATERIAL	REMARKS	QTY	PCS
5	CAP	LCP 6007AS UL94V-0	BLACK		1PCS
4	SHELL	SUS304 T=0.30mm	NI 50u' Min Plated		1PCS
3	LATCH	SUS301-H T=0.15mm	NI 50u' Min Plated	24H	1PCS
2	CONTACT	C7025 T=0.20mm	As of FRAMING ON CONTACT AREA, TIN 50u' MIN TING ON SOLDER TAIL, SN 80u' MIN UNDERPLATING OVERALL.		1PCS
1	HOUSING	LCP UL94V-0	LCP BLACK UL94V-0		1PCS


深圳市鑫风雷电子有限公司  
Shenzhen xinfenglei Electronics Co., Ltd

单位 UNITS	比例 SCALE	日期 DATE	制图 DRAWING	审核 CHKD	批准 APRD	产品料号 PRODUCT PART NO	产品名称 PRODUCT NO	联系方式 CONTACT
MM	1:1	2009/10/20	王冠 Wangguan	雷永健 Leiyongjian	雷永健 Leiyongjian	00101-UCAR022-B		mailto:sale@xfll.com www.xfll.com.cn


# RoHS 客户图

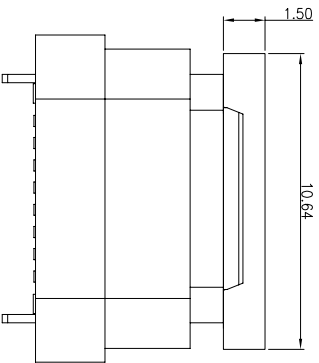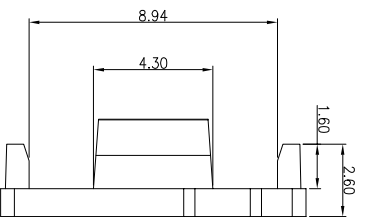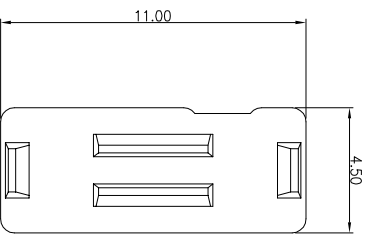

加防水圈示意图

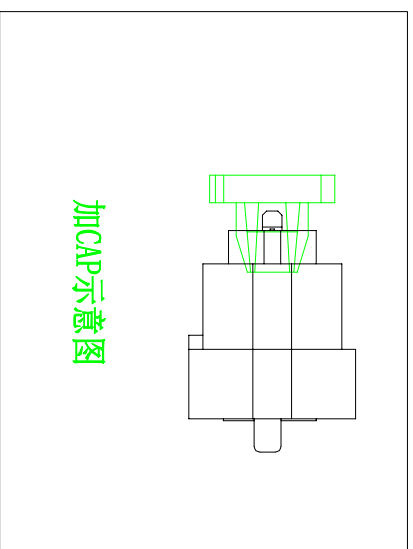

加CAP示意图

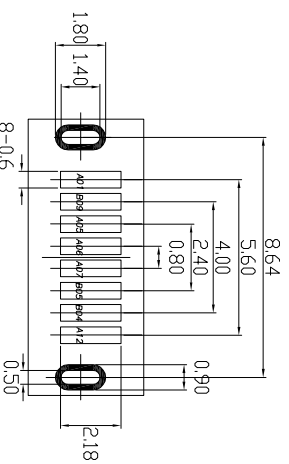

RECOMMENDED P. C. B. LAYOUT  
TOLERANCE UNSPECIFIED ±0.05mm

## 产品图

PRODUCT CHART DWG

### 公差一览表




TOLERANCE UNLESS OTHERWISE		TOLERANCE UNLESS OTHERWISE	
公差	单位	公差	单位
X	±0.30	X'	±5°
X	±0.25	X''	±2°
XX	±0.20	XX'	±1°
XXX	±0.15	XXX'	±0.5°

深圳市鑫风雷电子有限公司  
Shenzhen xinfenglei Electronics Co., Ltd

单位	MM	制图	王冠	产品料号	00101-UCAR022-B
比例	1:1	审核	雷永健	产品名称	
日期	2009/10/20	核准	雷永健	联系方式	mailto:salel@xfll.com
			Leiyongjian	联系邮箱	www.xfll.com

目录	变更内容	日期
MAPX A0	MODIFICATION NEW	DATE 09-10-20

# RoHS 客户图

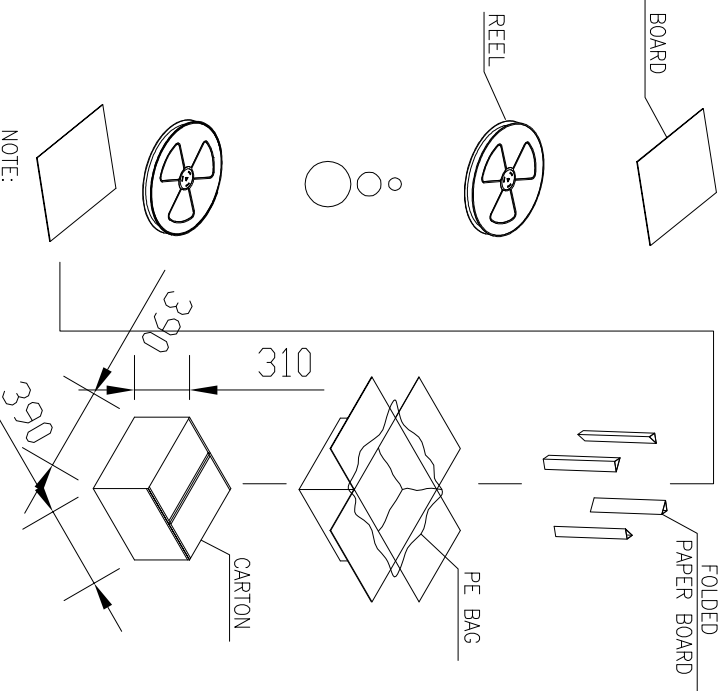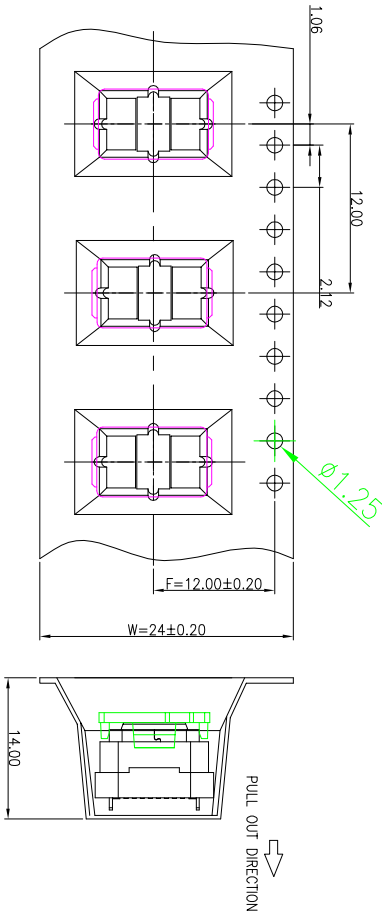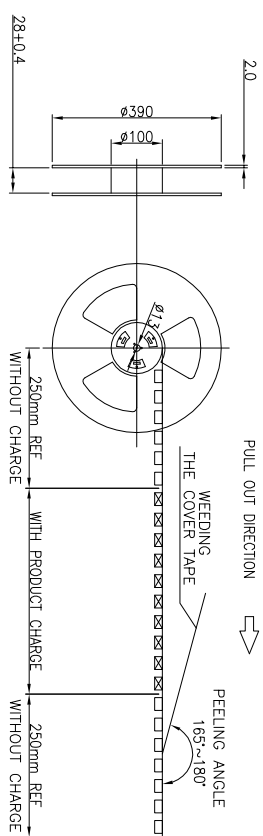

600	10	6000	PCS
PCS/卷	卷/箱		箱

- 注意:
1. 材料:  
纸箱: 纤维板, 瓦楞, 双层壁。  
胶带: 聚苯乙烯, 耐热温度: 120°C, 白。  
卷筒: 聚苯乙烯, 耐热温度: 70°C, 蓝色。  
包装: 聚乙烯, 耐热温度: 100°C。
  2. 剥离强度: 0.1 ~ 1.3 N(10 ~ 130克)
  3. 脱皮速度: 300mm /min。
  4. 每个袋子都应包括干燥剂\*2。
  5. 外箱上贴号物料标签及RHOS标签
  6. 同一产品只能装同一纸箱, 不允许其它产品;
  7. 包装后, 产品吻合面朝外; 柱子朝内;

产品图		公差一览表		单位		比例		日期		制图		产品料号	
PRODUCT CHAIR DWG		TOLERANCE UNLESS OTHERWISE		UNITS		SCALE		DATE		DRAWING		PRODUCT NO.	
X	±0.30	X	±5°	MM	1:1	2009/10/20	王冠	00101-UCAR022-B					
XX	±0.25	X	±2°				雷永健						
XX	±0.20	XX	±1°				雷永健						
XXX	±0.15	XXX	±0.5°				雷永健						

深圳市鑫风雷电子有限公司  
Shenzhen xinfenglei Electronics Co., Ltd

目錄	变更内容	日期
MAPX	MODIFICATION	DATE
A0	NEW	09-10-20