




1 2 3 4 5 6 7 8 9 10

RoHS 客户图








A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBUS2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBUS1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND

PIN	SIGNAL NAME	PIN	SIGNAL NAME
-----	-------------	-----	-------------




SECTION
A-A

SCALE 1:1

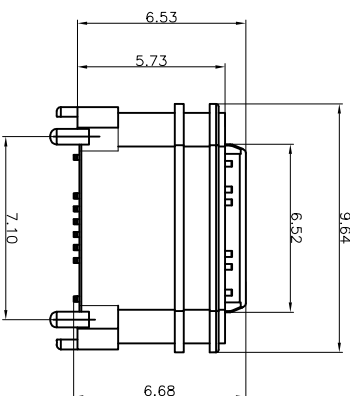

RECOMMENDED P.C.B. LAYOUT (1:1.00mm)
TOLERANCE UNSPECIFIED ±0.05mm



- Note:
1. Material:
 - 1.1 Housing: LCP
 - 1.2 Contact: C7025, t=0.20mm
 - 1.3 Shell: SUS316
 2. ELECTRICAL:
 - 2-1: CURRENT RATING: VBUS AND GND CONTACTS RATED AT 1.25A PARALLELED FOR A TOTAL OF 5A;
 - 2-2: INITIAL CONTACT RESISTANCE: 40 MEGOHMS
 - 2-3: DIELECTRIC WITHSTANDING VOLTAGE: 100V AC MIN;
 - 3: MECHANICAL CHARACTERISTICS:
 - 3-1: MATING FORCE: 5~20N
 - 3-2: UNMATING FORCE: 8~20N (INITIAL), 6~20N (AFTER 10000 CYCLES)
 - 3-3: FREQUENCY: 200±50 CYCLES / HOUR,
 - 3-4: OPERATING TEMPERATURE: -40°~80°.

1. Material:
- 1.1 Housing: LCP
 - 1.2 Contact: C7025, t=0.20mm
 - 1.3 Shell: SUS316
2. ELECTRICAL:
- 2-1: CURRENT RATING: VBUS AND GND CONTACTS RATED AT 1.25A PARALLELED FOR A TOTAL OF 5A;
 - 2-2: INITIAL CONTACT RESISTANCE: 40 MEGOHMS
 - 2-3: DIELECTRIC WITHSTANDING VOLTAGE: 100V AC MIN;
- 3: MECHANICAL CHARACTERISTICS:
- 3-1: MATING FORCE: 5~20N
 - 3-2: UNMATING FORCE: 8~20N (INITIAL), 6~20N (AFTER 10000 CYCLES)
 - 3-3: FREQUENCY: 200±50 CYCLES / HOUR,
 - 3-4: OPERATING TEMPERATURE: -40°~80°.

产品图

PRODUCT CHART DWG

公差一览表

TOLERANCE UNLESS OTHERWISE SPECIFIED	X	XX	XXX
±0.30	±0.25	±0.20	±0.15
±5°	±2°	±1°	±0.5°

深圳市鑫风雷电子有限公司
Shenzhen xinfenglei Electronics Co., Ltd

单位	MM	制图	王冠	产品料号	00305-UCAFD29-A
比例	1:1	审核	雷永健	产品名称	Type C 16p 母板180度立插SMT H=6.68 板厚2.0
日期	2009/10/20	批准	雷永健	联系方式	mailbox: sale@xfconn.com
DATE	2009/10/20	Appd	Lei Yong Jian	联系网站	www.xfconn.com