



# RoHS

# 客户图


目錄 MAPX A0	變更內容 MODIFICATION NEW	日期 DATE 09-10-20
------------------	-----------------------------	------------------------




1.





2.



3.



4.

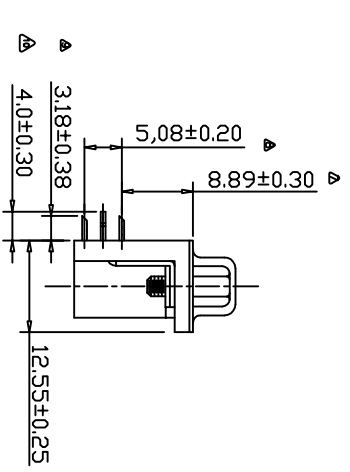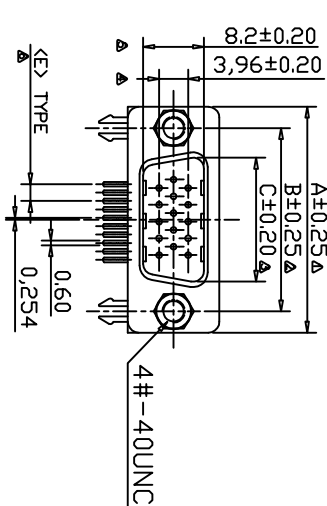


PARTS DIMENSION TABLE

parts no.	DIM. a	DIM. b	inner thread
1	4.8	11.8	4#40
2	5.8	12.0	4#40
3	4.8	11.8	M3
4	5.8	11.8	M3
5	4.8	11.8	M2.6
6	5.8	12.0	M2.6
7	6.0	12.0	4#40

**MATERIALS AND FINISH**  
 SHELL : STEEL MATERIAL, NICKEL FINISHED  
 INSULATOR : PBT THERMOPLASTIC, 30% GLASS FILLED, UI, 94Y-0 RATED, BLACK COLOR  
 CONTACT MATERIAL: BRASS  
 CONTACT FINISH : FULL GOLD FLASHED  
 GROUNDING BRACKET : BRASS MATERIAL, TIN FINISHED

**ELECTRICAL CHARACTERISTICS**  
 CONTACT CURRENT RATING : 5.0 AMPS  
 CONTACT RESISTANCE : 30 MILLIOHMS MAX.  
 DIELECTRIC WITHSTANDING VOLTAGE : 1000 V AC MIN.  
 INSULATION RESISTANCE : 5000 MEGAOHMS MIN.  
 TEMPERATURE RATING : -55°C ~ +105°C



No. of Contact	A±0.20	B±0.20	C±0.20	D
15	30.90	24.99	16.95	2.29
26	39.24	33.32	25.38	2.29
44	53.10	47.04	38.86	2.29
62	69.50	63.60	55.37	2.41

### 产品图

公差一览表  
 TOLERANCE UNLESS OTHERWISE SPECIFIED

深圳市鑫风雷电子有限公司 Shenzhen xinfenglei Electronics Co., Ltd	
单位 UNITS	MM
比例 SCALE	1:1
日期 DATE	2009/10/20
制图 DRAWING	王冠
审核 CHECK	雷永健
核准 APPD	雷永健
产品料号 PRODUCT PART NO.	00731-HDRM001-X
产品名称 PRODUCT NO.	HDR8.89 90度公15-62P系列
联系方式 Mailbox/Website	mailbox: sale1@xfll.com.com www: xfll.com.com