



RoHS 客户图





目錄 MAPX A0	變更內容 MODIFICATION NEW	日期 DATE 09-10-20
------------------	-----------------------------	------------------------

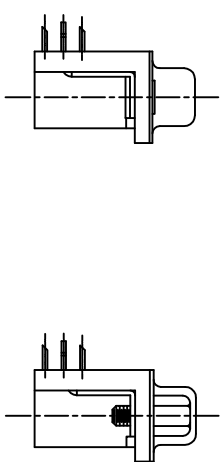

MATERIALS AND FINISH
 SHELL : STEEL MATERIAL, NICKEL FINISHED
 DIMPLES ON PLUG ONLY
 INSULATOR : PBT THERMOPLASTIC, 30% GLASS
 FILLED, UL 94V-0 RATED, BLACK COLOR
 CONTACT MATERIAL : BRASS
 CONTACT FINISH : SELECTIVE GOLD FLASH
 GROUNDING BRACKET : BRASS MATERIAL, TIN FINISHED
 JACK SCREWS : STEEL MATERIAL, NICKEL FINISHED
 WITH #4-40 THREADED ASSEMBLED

ELECTRICAL CHARACTERISTICS

CONTACT CURRENT RATING : 5.0 AMPS
 CONTACT RESISTANCE : 30 MIILOHMS MAX.
 DIELECTRIC WITHSTANDING VOLTAGE : 1000 V AC MIN.
 INSULATION RESISTANCE : 5000 MEGAOHMS MIN.
 TEMPERATURE RATING : -55°C ~ +105°C

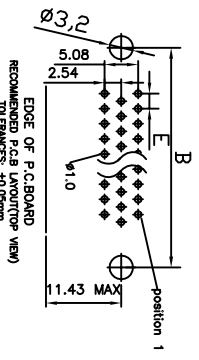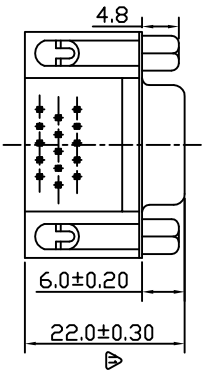

No. of Contact	A	B	C	E
09	30.90	24.99	16.34	2.29
15	39.24	33.32	24.76	2.29
25	53.10	47.04	38.40	2.29
37	69.50	63.50	54.89	2.41

产品图

公差一览表
 TOLERANCE UNLESS OTHERWISE SPECIFIED

UNIT	X	XX	XXX
±0.30	X	XX	XXX
±0.20	X	XX	XXX
±0.15	X	XX	XXX

深圳市鑫风雷电子有限公司
 Shenzhen xinfenglei Electronics Co., Ltd

单位 UNITS	MM
比例 SCALE	1:1
日期 DATE	2009/10/20
制图 DRAWING	王冠 Wangguan
审核 CHECK	雷永健 Lei Yongjian
核准 APPD	雷永健 Lei Yongjian
产品料号 PRODUCT PART NO.	00731-HDRF001-X
产品名称 PRODUCT NO.	HDR8-89 90度母15-62P系列
联系方式 Contact us	mailbox: sale1@xfll.com www: xfll.com

PARTS DIMENSION TABLE

part no.	DIM. a	inner thread	inner thread
1	4.8	1.8	4#40
2	5.8	1.20	4#40
3	4.8	1.8	M3
4	5.8	1.8	M3
5	4.8	1.8	M2.6
6	5.8	1.20	M2.6
7	6.0	1.20	4#40