

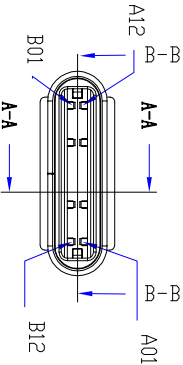

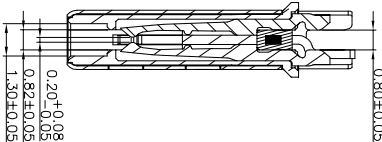
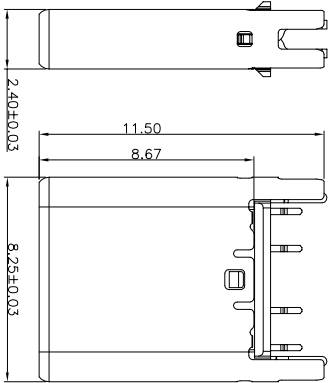


12345678910

RoHS 客户图



RECOMMENDED P.C.B. LAYOUT (T:0.75mm)
TOLERANCE UNSPECIFIED ±0.05mm


目錄 MAPX	變更內容 MODIFICATION	日期 DATE
A0	NEW	09-10-20

- NOTES:
- MATERIAL:
MOLDING: LCP UL94 V-0
CONTACT: COPPER ALLOY, C5191 T=0.15±0.02mm
GOLD PLATED 1u" Min ON CONTACT AREA, 100u" Min TIN (LEAD FREE) ON SOLDER AREA,
SHELL: SUS304-H, T=0.15±0.02mm
50u" NICKEL PLATING OVER ALL.
Card hook: SUS301-H, T=0.35±0.02mm
strapnel: SUS304-H, T=0.10±0.02mm
 - MECHANICAL:
INSERTION: 5~20N.
EXTRACTION: 8~20N.
DURABILITY: 10000 CYCLES
 - ELECTRICAL:
CURRENT: 5A MIN FOR VBUS;
0.25A MIN FOR OTHER.
VOLTAGE: 5VAC MAX
WITHSTANDING VOLTAGE: 100V AC.
CONTACT RESISTANCE: 40mΩ MAX.
INSULATION RESISTANCE: 100MΩ MIN.
 - ENVIRONMENTAL
TEMPERATURE RANGE -55°C ~ +85°C

TABLE : PIN DEFINE

A12	A9	A4	A1
GND	VBUS	VBUS	GND
GND	VBUS	VBUS	GND
B1	B4		B12

剖面 B-B

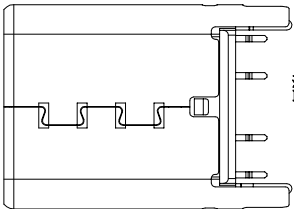

产品图
PRODUCT CHART DWG

深圳市鑫风雷电子有限公司

公差一览表 TOLERANCE UNLESS OTHERWISE				单位 UNITS	MM	制图 DRAWING	王冠	产品料号 PRODUCT PART NO.	00302-UCAM006-X
X	±0.30	X'	±5°	比例 SCALE	1:1	审核 CHKD	雷永健	产品名称 PRODUCT NO.	TYPE C 8P 公头 铆合式 插针式 不带板
.XX	±0.30	.XX'	±1°	日期 DATE	2009/10/20	核准 APPD	雷永健	角法 VIEW	☉ ☐
.XXX	±0.15	.XXX'	±0.5°					版本 VER	A0