RoHS 客户图

目錄 MAPX	设变内容 MODIFICATION	日期 DATE
A0	NEW	09-10-20





NOIE.
1.MATERIAL:
- 1.1 INSULATOR:LCP UL 94V-0
- 1.2 CONTACT:COPPER ALLOY(T=0.15mm)
- 1.3 SHELL:SUS-304(T=0.30mm)

2.ELECTRICAL CHARACTERISTICS;
- 2.1 CONTACT RATING:30 VAC
- 2.2 CONTACT CURRENT RATING:1.5A
- 2.3 DIELECTRIC WITHSTANDING VOLTAGE:100 V R.M.S.
- 2.4 INSULATION RESISTANCE 100MΩ MIN INITIAL
- 2.5 OPERATING TEMPEROTURE:-0°C ~ 50°C

3 MECHANICAL CHARACTERISTICS:
- 3.1 MATING FORCE:3.57kg MAX
- 3.2 UNMATED FORCE:1.02kg MIN

4.PLATING
- 4.1 TERMINAL:1u"3u"5u"10u"15u"GOLD FLASH ALL OVER 50u" MIN NICKEL AND 100u"MIN Tin ALL OVER 50u" MIN NICKEL ON SOLDER AREA
- 4.2 SHELL:50u"MIN.NICEL OVER 20"MIN COPPER

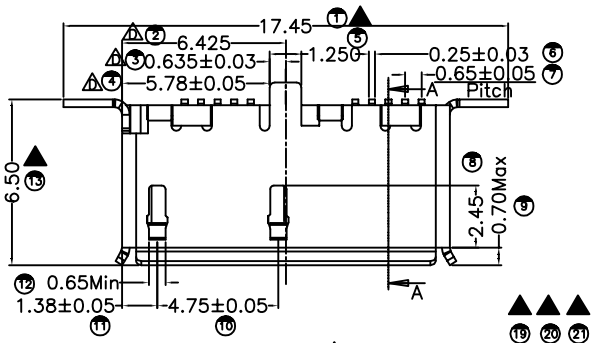



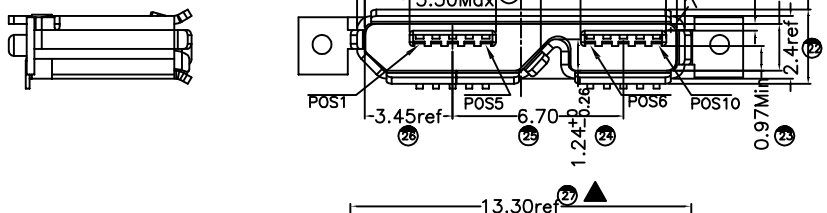

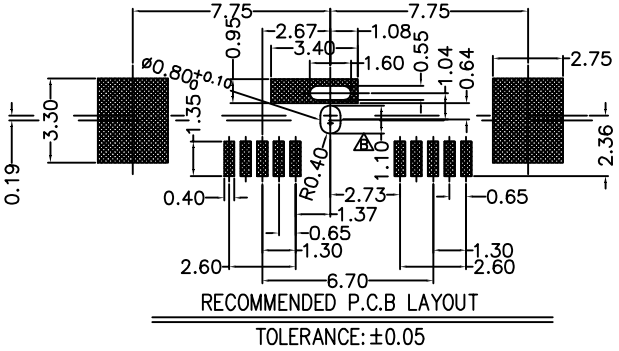

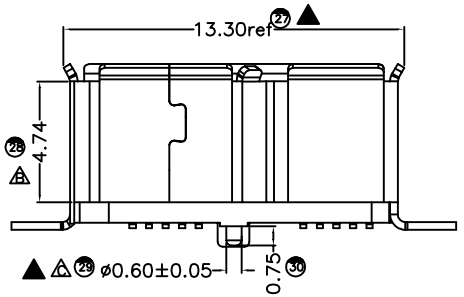

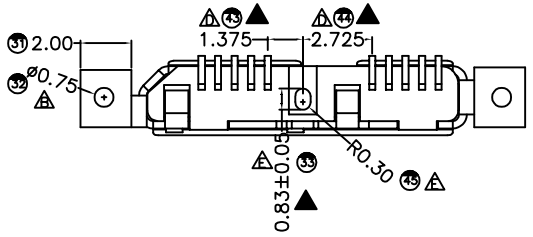

Pin NUMBER	SIGNAL NAME
1	VBUS
2	D-
3	D+
4	ID
5	GND
6	MicA_SSTX-
7	MicA_SSTX+
8	GND_DRAIN
9	MicA_SSRX-
10	MicA_SSRX+
Shell	Shield

	环保要求	产品必须符合ROHS要求		
3	Shell	SUS-304		Ni Plated
2	Terminal	Pho.Bronse C5191R-H		Gold/Tin Plated
1	Housing	High Temp	Black	UL 94V-0
NO.	DESCRIPTION	MATERIAL	COLOR	REMARK

产品图 PRODUCT CHART DWG

公差一览表 TOLERANCE UNLESS OTHERWISE

X.	±0.30	X'.	±5°
.X	±0.25	.X'	±2°
.XX	±0.30	.XX'	±1°
.XXX	±0.15	.XXX'	±0.5°

深圳市鑫风雷电子有限公司

单位 UNITS	MM	制图 DRAWING	王 冠	产品料号 PRODUCT PART NO.	17004-U3MF005-X
比例 SCALE	1:1	审核 CHKD	雷永健	产品名称 PRODUCT NO.	USB3.0 MICRO B型180度SMT H=6.5
日期 DATE	2009/10/20	核准 APPD	雷永健	角法 VIEW	版本 VER A0

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO XINFENGLEI ELECTRONIC CO.,LTD.AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

由Autodesk教育版产品制作