
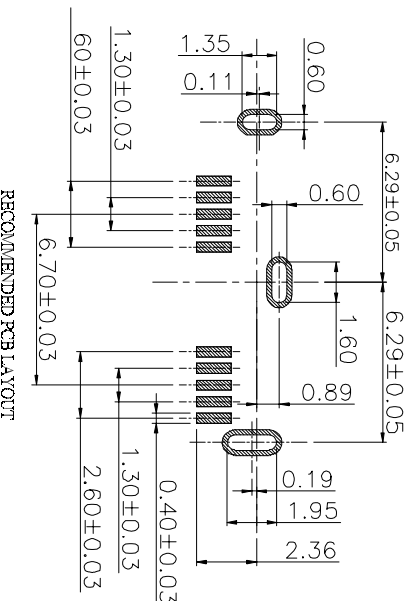

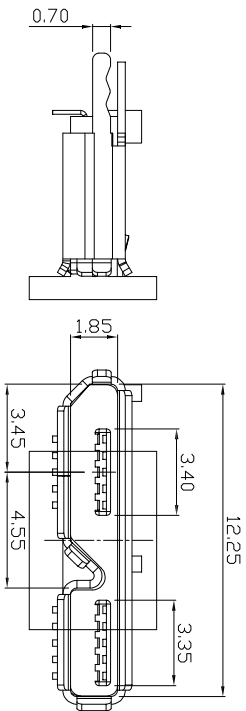



# ROHS 客户图

目錄 MAPX A0	變更內容 MODIFICATION NEW	日期 DATE 09-10-20
------------------	-----------------------------	------------------------

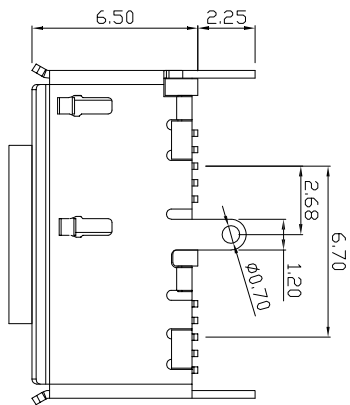

RECOMMENDED PCB LAYOUT

- NOTE:
- MATERIAL:
    - INSULATOR: LCP UL 94V-0
    - CONTACT: COPPER ALLOY(T=0.15mm)
    - SHELL: SUS-304(T=0.30mm)
  - ELECTRICAL CHARACTERISTICS:
    - CONTACT RATING: 30 VAC
    - CONTACT CURRENT RATING: 1.5A
    - DIELECTRIC WITHSTANDING VOLTAGE: 100 V R.M.S.
    - INSULATION RESISTANCE: 100MΩ MIN INITIAL
    - OPERATING TEMPERATURE: -0°C ~ 50°C
  - MECHANICAL CHARACTERISTICS:
    - MATING FORCE: 3.57kg MAX
    - UNMATED FORCE: 1.02kg MIN
  - PLATING:
    - TERMINAL: 1u"3u"5u"10u"15u" GOLD FLASH ALL OVER 50u" MIN NICKEL AND 100u" MIN TIN ALL OVER 50u" MIN NICKEL ON SOLDER AREA
    - SHELL: 50u" MIN NICKEL OVER 20u" MIN COPPER

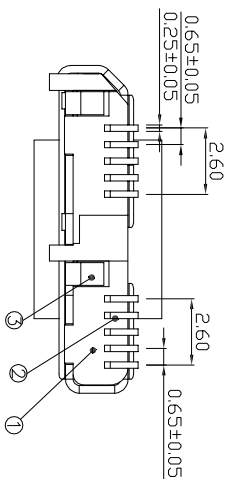

3	Shell	SUS-304	Ni Plated
2	Terminal	Pho.Bronse C5191R-H	Gold/Tin Plated
1	Housing	High Temp	Black
NO.	DESCRIPTION	MATERIAL	COLOR
			REMARK

环保要求

产品必须符合ROHS要求

## 深圳市鑫风雷电子有限公司

公差一览表		单位		MM	
TOLERANCE UNLESS OTHERWISE	UNITS	X	±0.30	X	±0.5
		XX	±0.25	X	±2
		XXX	±0.15	XXX	±0.5
日期		2009/10/20		日期	
审核		雷永健		审核	
批准		雷永健		批准	
产品料号		17004-U3MF006-B		产品料号	
产品名称		ULS3A-0 MICRO B3801802SMT外壳01D无柱 H=6.5		产品名称	
角法		第三角法		角法	
版本		A0		版本	

Pin NUMBER	SIGNAL NAME
1	VBUS
2	D-
3	D+
4	ID
5	GND
6	MICA_SSTX-
7	MICA_SSTX+
8	GND_DRAIN
9	MICA_SSRX-
10	MICA_SSRX+
	Shield