

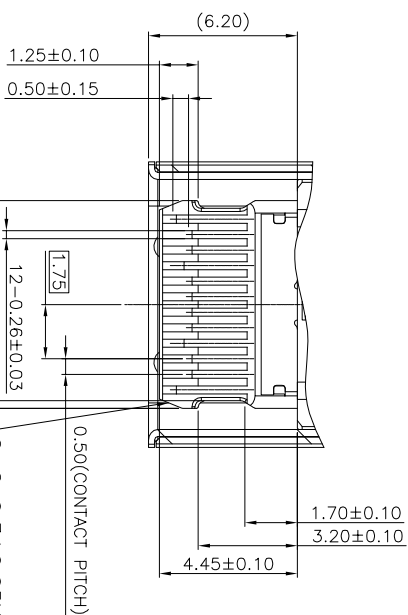
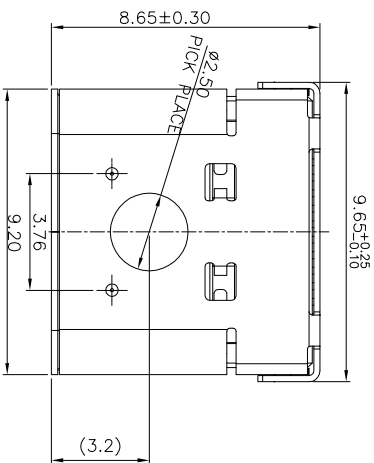
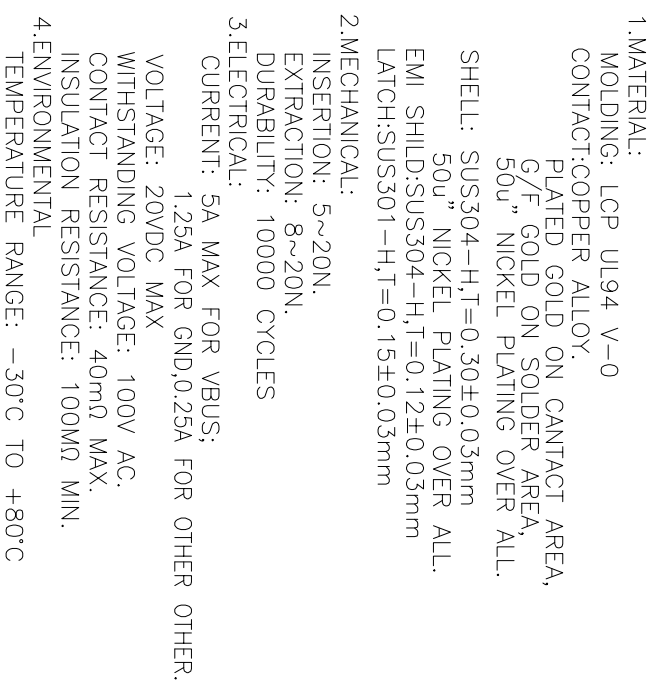
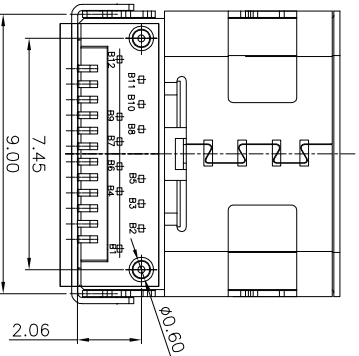
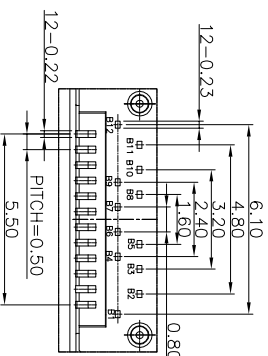


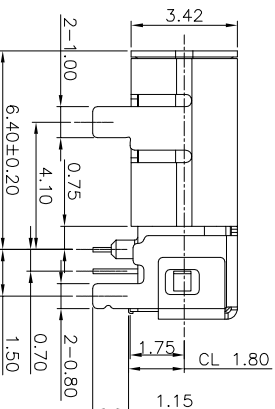


2-C 0.3±0.05X0.75±0.05

SECTION B-B
Scale 1:1

Scale 1:1

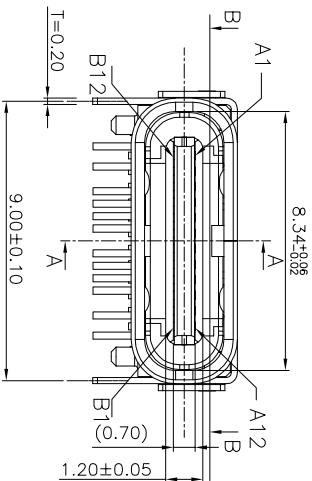

TEMPERATURE RANGE: -30°C TO $+80^{\circ}\text{C}$

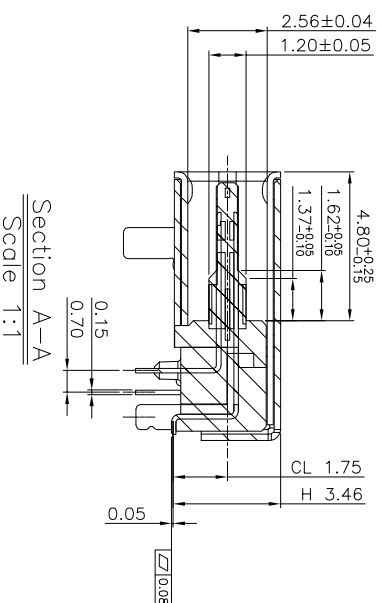

产品图

PRODUCT CHART DWG



表一 差公

[illegible]

深圳市鑫风雷电子有限公司
Shenzhen xinfenglei Electronics Co., Ltd

1 2 3 4 5 6 7 8 9 10

RoHS 客户图

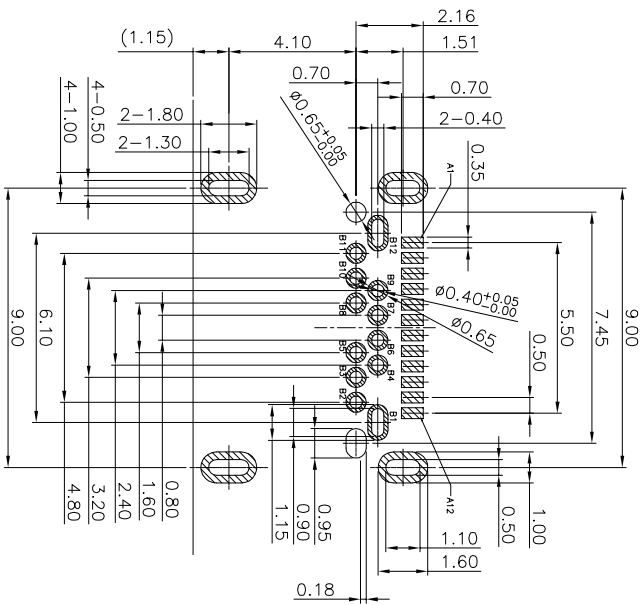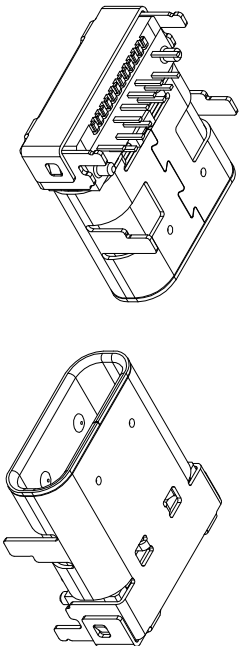

RECOMMEND P.C.B LAYOUT(COMPONENT SIDE)
TOLERANCE FOR PCB LAYOUT IS ± 0.05

USB TYPE-C FULL-FEATURED RECEPTACLE INTERFACE PIN ASSIGNMENTS



PIN	Signal Name	Description	PIN	Signal Name	Description
A1	GND	Ground return	B12	GND	Ground return
A2	SSTXp1	Positive half of first SuperSpeed TX differential pair	B11	SSRXp1	Positive half of first SuperSpeed RX differential pair
A3	SSTXn1	Negative half of first SuperSpeed TX differential pair	B10	SSRXn1	Negative half of first SuperSpeed RX differential pair
A4	Vbus	Bus Power	B9	Vbus	Bus Power
A5	CC1	Configuration Channel	B8	SBU2	Sideband Use (SBU)
A6	Dp1	Positive half of the USB 2.0 differential pair-Position 1	B7	Dn2	Negative half of the USB 2.0 differential pair-Position 2
A7	Dn1	Negative half of the USB 2.0 differential pair-Position 1	B6	Dp2	Positive half of the USB 2.0 differential pair-Position 2
A8	SBU1	Sideband Use (SBU)	B5	CC2	Configuration Channel
A9	Vbus	Bus Power	B4	Vbus	Bus Power
A10	SSRXn2	Negative half of second SuperSpeed RX differential pair	B3	SSTXn2	Negative half of second SuperSpeed TX differential pair
A11	SSRXp2	Positive half of second SuperSpeed RX differential pair	B2	SSTXp2	Positive half of second SuperSpeed TX differential pair
A12	GND	Ground return	B1	GND	Ground return

产 品 图				深 圳 市 鑫 风 雷 电 子 有 限 公 司				
PRODUCT CHART DWG				Shenzhen xinfenglei Electronics Co., Ltd				
公差一览表			单位	制图	王冠	产品料号		
TOLERANCE UNLESS OTHERWISE			UNITS	DRAWING	Wangguang	PRODUCT PART NO		
X	±0.30	X'	±5°	比例 SCALE	1:1	审核	雷永健	产品名称
.X	±0.25	.X'	±2°			CHD	Leiyoungjian	PRODUCT NO.
.XX	±0.20	.XX'	±1°			核准	雷永健	联系方式
.XXX	±0.15	.XXX'	±0.5°			Appd	Leiyoungjian	Mailbox: sale@xfll.com.com www.xfll.com.com
DATE			2009/10/20					

RoHS 客户图


出料方向

PULL OUT DIRECTEON

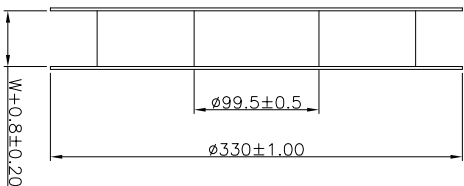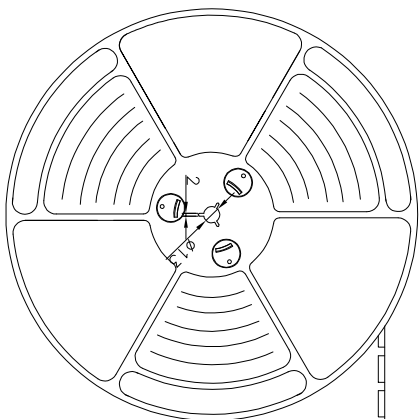


NOTES

1. 帶子引導長度
LEAD TAPE LENGTH
出料方向
PULL OUT DIRECTEON

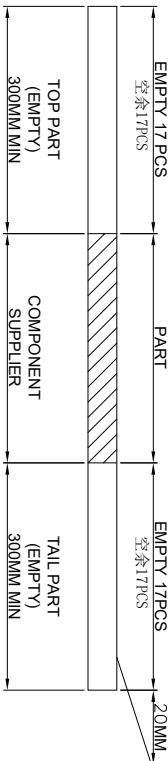

2. 出貨運輸過程中一定注意:
THIS REQUIREMENT SHOULD BE APPLIED AT SHIPMENT:
卷帶在運輸過程中不能散開
PEELING OFF SHOULD NOT BE ALLOWED DURING TRANSPORTATION

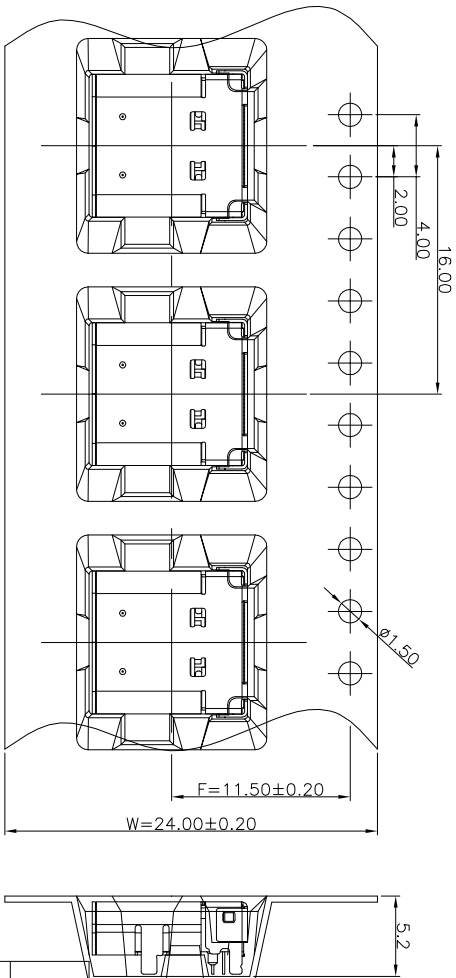

产品图

PRODUCT CHART DWG

深圳市鑫风雷电子有限公司
Shenzhen xinfenglei Electronics Co., Ltd

公差一览表



TOLERANCE UNLESS OTHERWISE			UNIT		SCALE		DATE		DATE		DATE	
X	±0.30	X'	±5°		比例	1:1	制图	王冠	产品料号	23002-UCAF005-A		
X	±0.25	X'	±2°		审核		审核	雷永健	产品名称	Type C 24p板上双壳前插后贴脚长1.2 L=8.65		
.XX	±0.20	.XX'	±1°		日期	2009/10/20	核准	雷永健	联系方式	mailto:sale@xfll.com		
.XXX	±0.15	.XXX'	±0.5°		DATE		APPD	Leiyongjian	Mailbox/web	www.xfll.com.com		

RoHS 客户图

目錄 MAPX	設定內容 MODIFICATION	日期 DATE
A0	NEW	09-10-20


at small positioning hole of the carrier tape side).
標籤黏貼處 (朝捲裝包材的小定位孔一側)

Location of label sticking (label

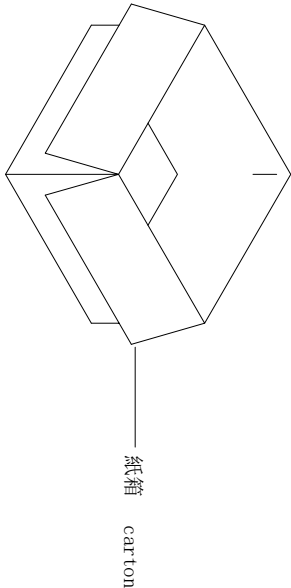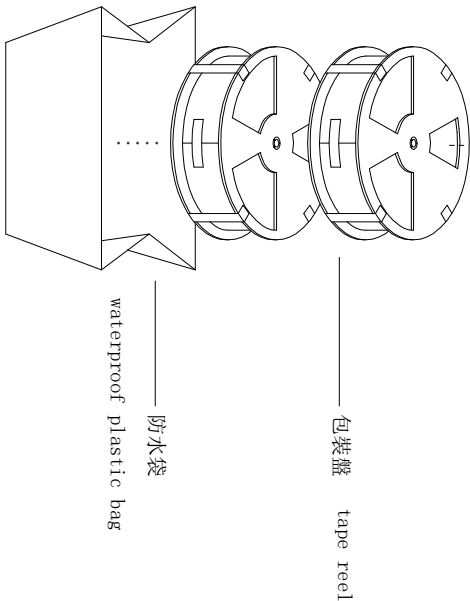

產品料號 (PRODUCT No.)	包裝量 (PACKING CAPACITY)	重量 (WEIGHT (kg))
PCS/REEL	REELS/CARTON	PCS/CARTON
800	10	8000
		N.W./PCS
		N.W./BOX
		G.W./BOX

產品圖 PRODUCT CHART DWG	深圳市 鑫 風 雷 電 子 有 限 公 司 Shenzhen xinfenglei Electronics Co., Ltd
公差一覽表 TOLERANCE UNLESS OTHERWISE	單位 UNITS
X. ±0.30	X'. ±5°
.X. ±0.25	.X'. ±2°
.XX. ±0.20	.XX'. ±1°
.XXX. ±0.15	.XXX'. ±0.5°
比例 SCALE	1:1
日期 DATE	2009/10/20
制圖 DRAWING	王 冠 Wangguang
審核 CHKD	雷永健 Leiyongjian
核准 APPD	雷永健 Meibaoz/ueb
產品料號 PRODUCT PART NO.	23002-UCAF005-A
產品名稱 PRODUCT NO.	Type C 24p板上双壳前插后贴脚长1.2 L=8.65
联系方式 MAILBOX/WEB	mailto:sale1@xfll.com www.xfll.com.cn

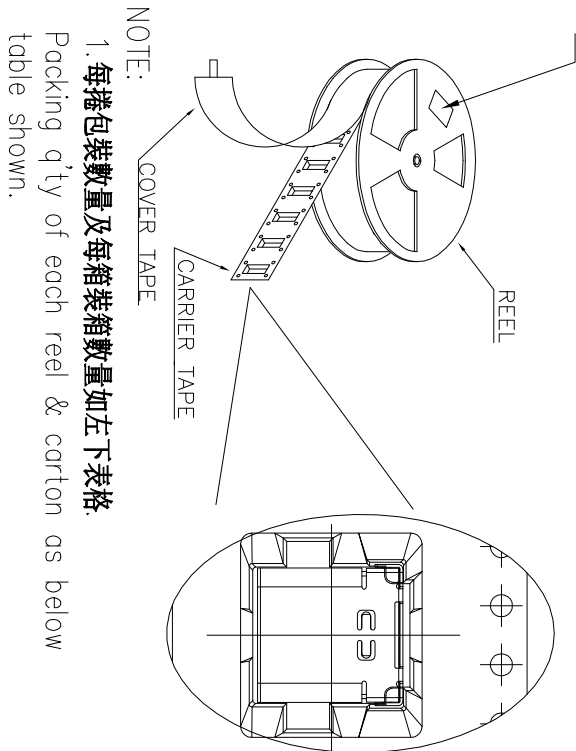

NOTE:

- 每捲包裝數量及每箱裝箱數量如左下表格
Packing q'ty of each reel & carton as below table shown.
- 以上膠帶覆蓋下包裝帶經包裝機熱熔包裝
Use cover tape to cover and hot melt machine to seal up.
- 將裝滿產品的卷盤放入紙箱並以膠帶封口
Put reels in the carton and use adhesive tape to seal up.