

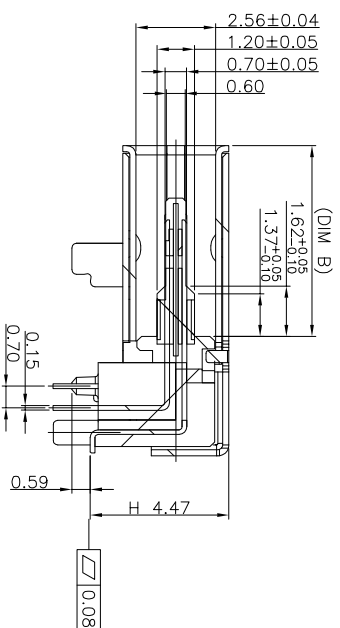
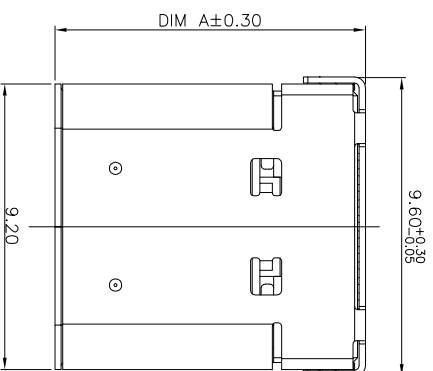


Rohs
客户图



7	8	9	10
目録 MAPX	変更内容 MODIFICATION	日期 DATE	
AO	NEW	09-10-20	

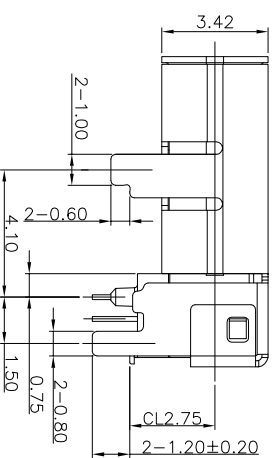

Section A-A
Scale 1:1

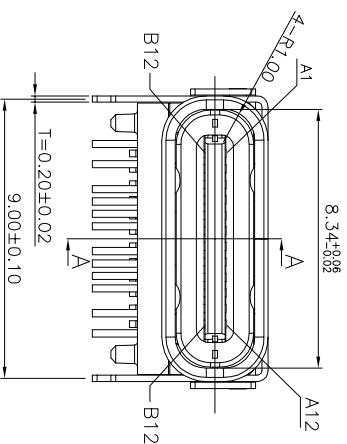

NO	DIM A	DIM B
3	10.0	6.2
4	8.65	4.83
	--	--

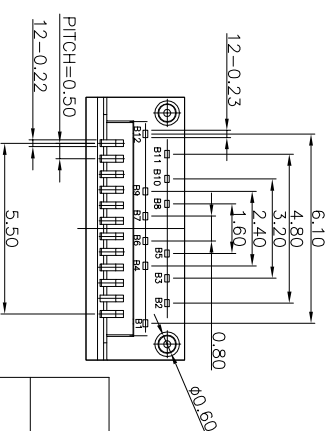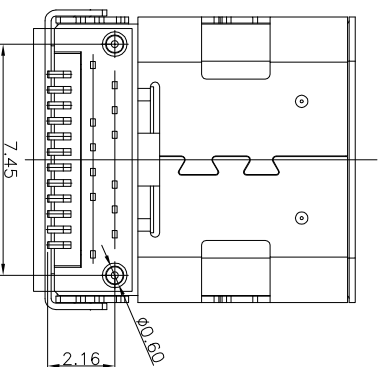

Detail A
Scale 1:1

必品屋

PRODUCT CHART DWG

深圳市鑫风雷电子有限公司
Shenzhen xinfenglei Electronics Co., Ltd

公差一覽表			單位 UNITS	圖 DRAWING	王冠 Morgnum	產品料号 Product Part No.
TOLERANCE UNLESS OTHERWISE			MM	制圖 DRAFTING	雷永健 Wong Yung Kuen	23002-UCAF007-X
X.	+0.30	X.	+5°	審核 CHECK	雷永健 Wong Yung Kuen	產品名称 Product Name
.X	+0.25	.X	+2°	核准 APPROVED	雷永健 Wong Yung Kuen	NO
.XXX	+0.20	.XX	+1°	日期 DATE	2009/10/20	联系方式 Contact Method
.XXX	+0.15	.XXX	+0.5°			mailbox: sales@cfi.com.com www.xfl.com.com

1.MATERIAL:
MOLDING: LCP UL94 V-0
CONTACT:COPPER ALLOY.
PLATED GOLD ON CONTACT AREA,
G/F GOLD ON SOLDER AREA,
50u" NICKEL PLATING OVER ALL.

SHELL: SUS304-H,T=0.30±0.03mm
50u" NICKEL PLATING OVER ALL.

EMI SHILD:SUS304-H,T=0.12±0.03mm
LATCH:SUS301-H,T=0.15±0.03mm



2.MECHANICAL:
INSERTION: 5~20N.
EXTRACTION: 8~20N.
DURABILITY: 10000 CYCLES

3.ELECTRICAL:
CURRENT: 5A MAX FOR VBUS;
1.25A FOR GND,0.25A FOR OTHER OTHER.
VOLTAGE: 20VDC MAX
WITHSTANDING VOLTAGE: 100V AC.
CONTACT RESISTANCE: 40mΩ MAX.
INSULATION RESISTANCE: 100MΩ MIN.

4.ENVIRONMENTAL
TEMPERATURE RANGE: -30°C TO +80°C

1 2 3 4 5 6 7 8 9 10

RoHS 客户图

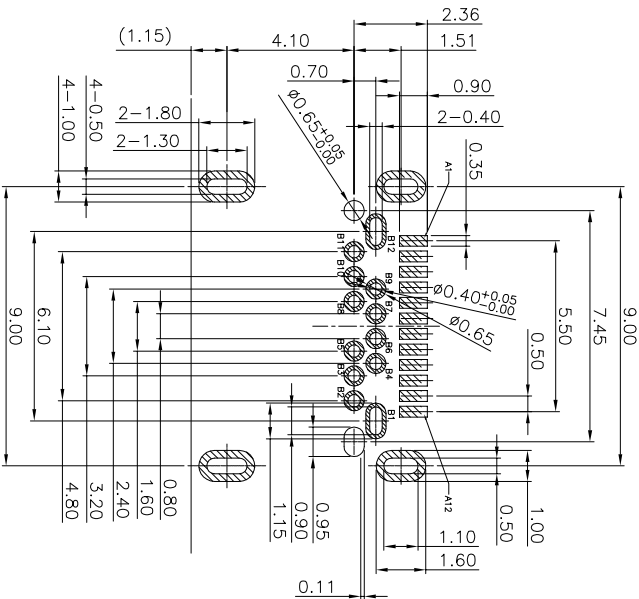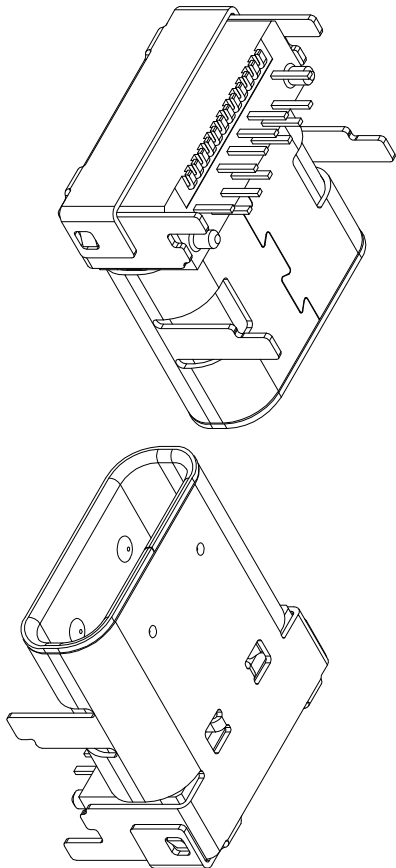

RECOMMEND P.C.B LAYOUT(COMPONENT SIDE)
TOLERANCE FOR PCB LAYOUT IS ± 0.05

目錄 MAPX	設定內容 MODIFICATION	日期 DATE
A0	NEW	09-10-20

USB TYPE-C FULL-FEATURED RECEPTACLE INTERFACE PIN ASSIGNMENTS

PIN	Signal Name	Description	PIN	Signal Name	Description
A1	GND	Ground return	B12	GND	Ground return
A2	SSTXp1	Positive half of first SuperSpeed TX differential pair	B11	SSRXp1	Positive half of first SuperSpeed RX differential pair
A3	SSTXn1	Negative half of first SuperSpeed TX differential pair	B10	SSRXn1	Negative half of first SuperSpeed RX differential pair
A4	Vbus	Bus Power	B9	Vbus	Bus Power
A5	CC1	Configuration Channel	B8	SBU2	Sideband Use (SBU)
A6	Dp1	Positive half of the USB 2.0 differential pair-Position 1	B7	Dn2	Negative half of the USB 2.0 differential pair-Position 2
A7	Dn1	Negative half of the USB 2.0 differential pair-Position 1	B6	Dp2	Positive half of the USB 2.0 differential pair-Position 2
A8	SBU1	Sideband Use (SBU)	B5	CC2	Configuration Channel
A9	Vbus	Bus Power	B4	Vbus	Bus Power
A10	SSRXn2	Negative half of second SuperSpeed RX differential pair	B3	SSTXn2	Negative half of second SuperSpeed TX differential pair
A11	SSRXp2	Positive half of second SuperSpeed RX differential pair	B2	SSTXp2	Positive half of second SuperSpeed TX differential pair
A12	GND	Ground return	B1	GND	Ground return

产品图

PRODUCT CHART DWG



公差一览表

TOLERANCE UNITS	公差	UNIT	比例	DATE	审核	制图	产品料号
X	±0.30	X'	±5°	2009/10/20	雷永健	王冠	23002-UCAR007-X
.X	±0.25	.X'	±2°		雷永健	雷永健	产品名称
.XX	±0.20	.XX'	±1°		雷永健	雷永健	PRODUCT NO.
.XXX	±0.15	.XXX'	±0.5°		雷永健	雷永健	联系方式

深圳市鑫风雷电子有限公司
Shenzhen xinfenglei Electronics Co., Ltd


RoHS 客户图

出料方向
PULL OUT DIRECTION

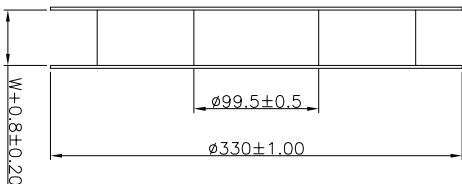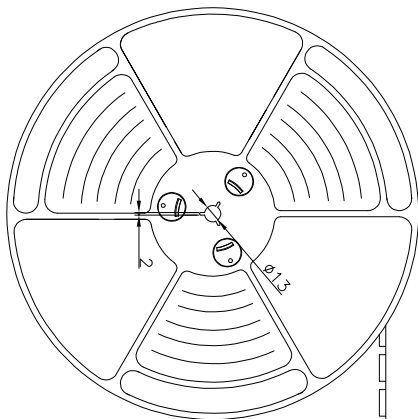


NOTES

1. 带子引导长度
LEAD TAPE LENGTH
出料方向
PULL OUT DIRECTION

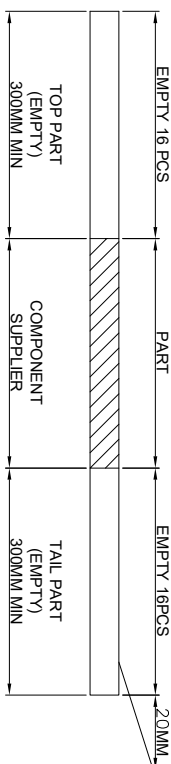

2. 出货运输过程中一定注意:
THIS REQUIREMENT SHOULD BE APPLIED AT SHIPMENT:
卷带在运输过程中不能散开
PEELING OFF SHOULD NOT BE ALLOWED DURING TRANSPORTATION

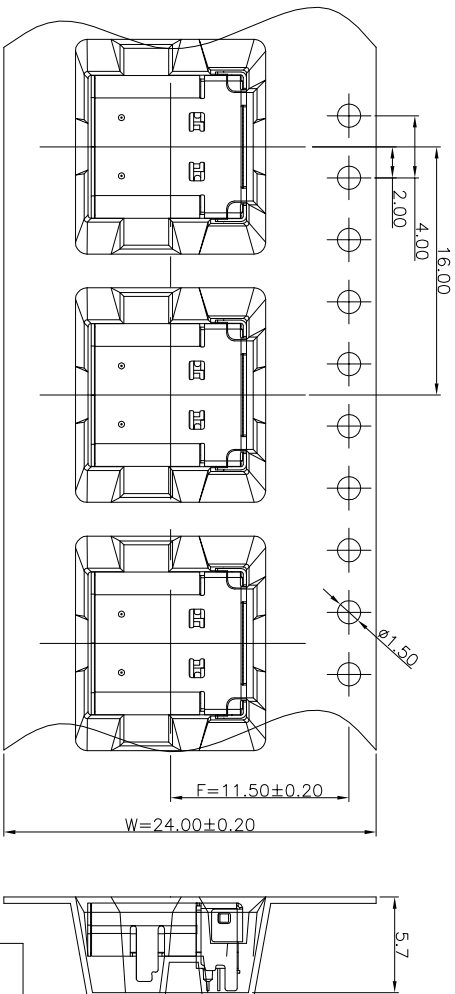

产品图

PRODUCT CHART DWG

公差一览表

公差一览表				单位				比例				日期			
TOLERANCE UNLESS OTHERWISE				UNITS				SCALE				DATE			
X	±0.30	X'	±5°	X	±0.25	X'	±2°	XX	±0.20	XX'	±1°	XXX	±0.15	XXX'	±0.5°




深圳市鑫风雷电子有限公司
Shenzhen xinfenglei Electronics Co., Ltd

单位	制图	审核	日期	比例	制图	审核	日期	比例	制图	审核	日期
mm	王冠	雷永健	2009/10/20	1:1	王冠	雷永健	2009/10/20	1:1	王冠	雷永健	2009/10/20
mm	王冠	雷永健	2009/10/20	1:1	王冠	雷永健	2009/10/20	1:1	王冠	雷永健	2009/10/20
mm	王冠	雷永健	2009/10/20	1:1	王冠	雷永健	2009/10/20	1:1	王冠	雷永健	2009/10/20

RoHS 客户图

目錄 MAPX	變更內容 MODIFICATION	日期 DATE
A0	NEW	09-10-20

at small positioning hole of the carrier tape side).
標籤黏貼處 (朝捲裝包材的小定位孔一側)
Location of label sticking (label

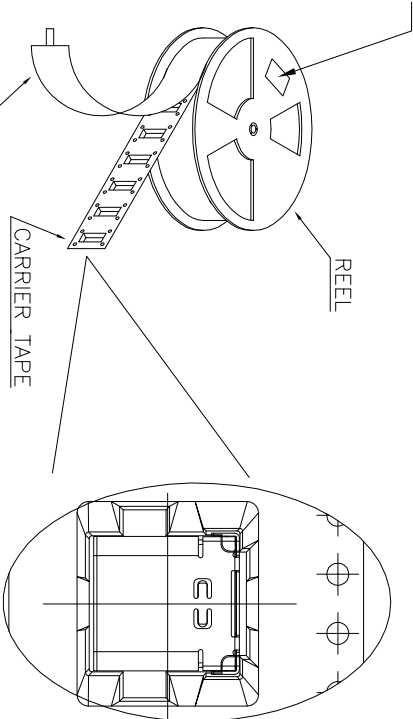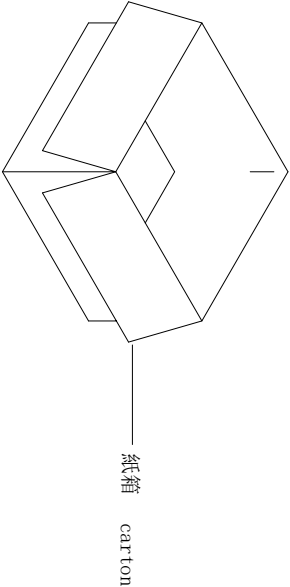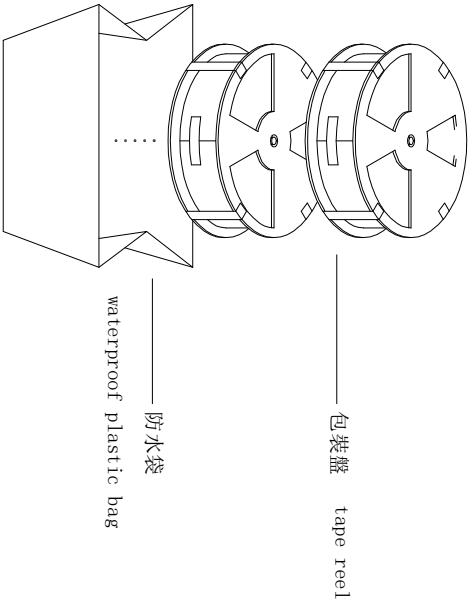

NOTE:

- 每捲包裝數量及每箱裝箱數量如左下表格。
Packing q'ty of each reel & carton as below table shown.
- 以上膠帶覆蓋下包裝帶經包裝機熱熔包裝
Use cover tape to cover and hot melt machine to seal up.
- 將裝滿產品的卷盤放入紙箱並以膠帶封口
Put reels in the carton and use adhesive tape to seal up.

產品圖

PRODUCT CHART DWG

公差一覽表

公差一覽表 TOLERANCE UNLESS OTHERWISE SPECIFIED	單位 UNITS	比例 SCALE	日期 DATE	核准 APPRO	產品料號 PRODUCT PART NO.	產品名稱 PRODUCT NO.	聯繫方式 mailbox: sale@xfll.com
X ±0.30 X ±0.25 XX ±0.20 XXX ±0.15	X' ±5° X' ±2° XX' ±1° XXX' ±0.5°	1:1	2009/10/20	王冠 Wangguan 雷永健 Leiyongjian	23002-UCAF007-X	產品名稱 PRODUCT NO.	www.xfll.com

深圳市 鑫 風 雷 電 子 有 限 公 司
Shenzhen xinfenglei Electronics Co., Ltd

產品料號 (PRODUCT No.)	包裝容量 (PACKING CAPACITY)	重量 WEIGHT (kg)
PCS/REEL	REELS/CARTON	N.W./PCS
700	10	7000
		N.W./BOX
		G.W./BOX