
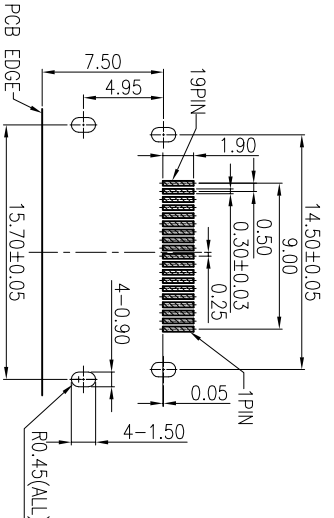

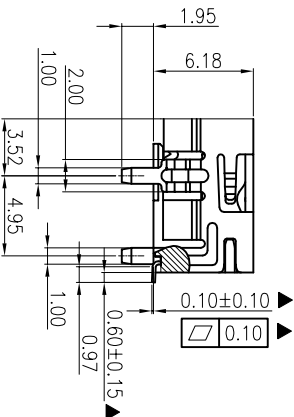



1 ROHS

2 客户图

1 2 3 4 5 6 7 8 9 10

目錄 MAPX	變更內容 MODIFICATION	日期 DATE
A0	NEW	09-10-20



RECOMMENDED PCB LAYOUT (T:1.60mm)
TOLERANCE UNSPECIFIED ±0.10mm

- NOTES:
- ELECTRONIC:
CONTACT RESISTANCE: 20mohm MAX
INSULATION RESISTANCE: 1000 Mohm MIN
WITHSTAND VOLTAGE:AC 500V,1min.
 - MECHANICAL:
DURABILITY: 10000 CYCLE
 - ENVIRONMENT CHARACTERISTICS:
OPERATING TEMPERATURE:-55°C TO +105°C
 - RECOMMANDER PCB THICKNESS 1.2
 - 标示“▲”符号的尺寸为重点检验尺寸。

5.MATERIAL LIST:

3	SHELL	1	COOPER ALLOY T=0.50	NI PLATED
2	CONTACT	19	COOPER ALLOY T=0.20	AU/TIN PLATED
1	HOUSING	1	THERMOPLASTIC	(UL 94V-0) BLACK
No.	PART NAME	QTY	MATERIAL	REMARK

产品图

深圳市鑫风雷电子有限公司
Shenzhen xinfenglei Electronic Co., Ltd

公差一览表 TOLERANCE UNLESS OTHERWISE		制图 DRAWING		产品料号 PRODUCT PART NO.	
X	±0.30	X	王冠	00207-HDAF012-X	
XX	±0.25	X	审核 CHKD		
XXX	±0.15	XX	核准 APPD		
比例 SCALE		日期 DATE		产品名称 PRODUCT NO.	
1:1		2009/10/20		HDMI A TYPE母座板上SMT短体 L=9.5	
角法 VIEW		版本 VER		版本 VER	
				A0	