
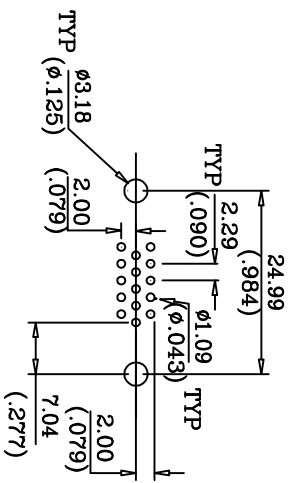
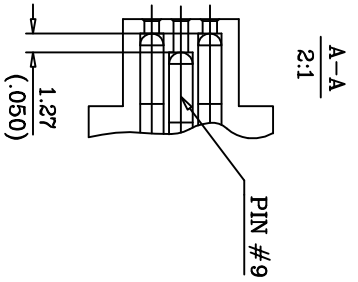
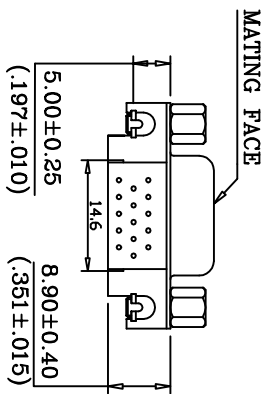


# ROHS

# 客户图

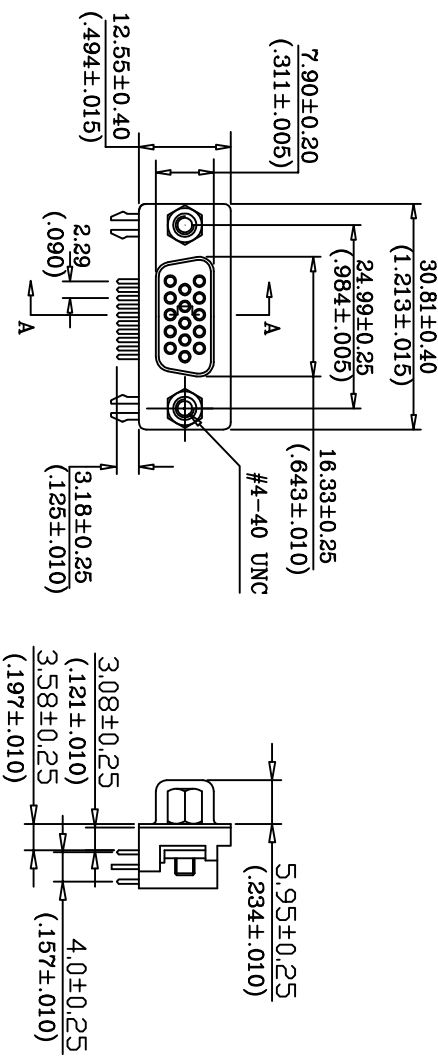

MATERIAL:  
INSULATOR: PBT+30% GLASS FIBER (UL 94V-0),  
CONTACT: PHOSPHOR BRONZE OR BRASS,  
CONTACT PLATED: GOLD OVER NICKEL OR TIN  
SHELL: STEEL, ZINC PLATED OR TIN PLATED  
INSULATOR RESISTANCE: 1000M MIN. AT 500V DC  
CURRENT RATE: 5 AMPS  
SPECIFICATION  
DIELECTRIC STRENGTH: 1000V PER  
OPERATION TEMPERATURE: -55C TO +105C  
IMPEDANCE: 16M FOR 25MHZ  
NOTICE: THE DIMENSIONS MARKED WITH "A" BE  
CONTROLLED BY QC.

PARTS DIMENSION TABLE

parts no.	DIM. d	DIM. b	inner thread
C	4.8	11.8	4#40
E	5.8	12.0	4#40
G	4.8	11.8	M3
H	5.8	11.8	M3
I	4.8	11.8	M2.6
X	5.8	12.0	M2.6
Z	6.0	12.0	4#40

### 产品图

PRODUCT CHART DWG

### 公差一览表

TOLERANCE UNLESS OTHERWISE SPECIFIED	公差一览表
X	±0.30
XX	±0.25
XXX	±0.15
X	±0.50
XX	±0.20
XXX	±0.15
X	±2°
XX	±1°
XXX	±0.5°

## 深圳市鑫风雷电子有限公司

Shenzhen xinfenglei Electronics Co., Ltd

单位	单位	比例	日期	制图	审核	核准	产品料号	产品名称	产品方式	联系方法
UNITS	MM	SCALE	DATE	DRAWING	CHKD	APPD	PRODUCT NO.	PRODUCT NAME	PRODUCT TYPE	CONTACT INFO
MM	MM	1:1	2009/10/20	王冠	雷永健	雷永健	00731-HDRF002-X	HDR3.08 90度母15-62P系列		mailbox: sale1@xfl.com, www: xfl.com, com