

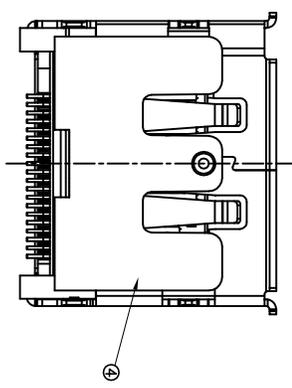
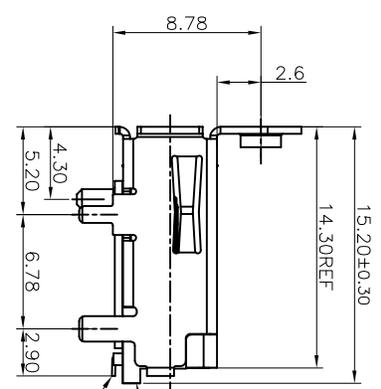
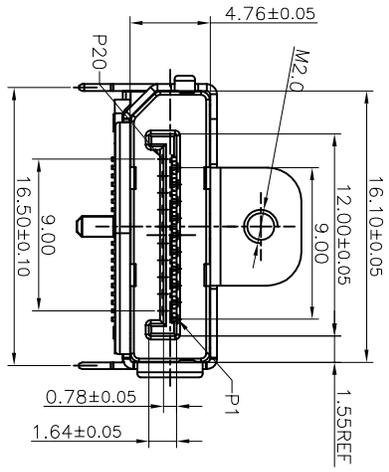
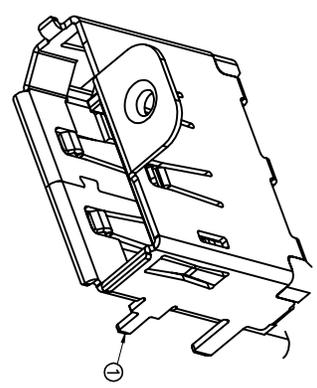


ROHS 客户图

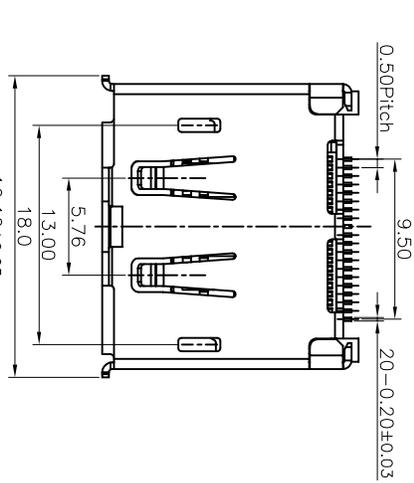

- SPECIFICATIONS:**
- MECHANICAL :
 - 1.1 INSERTION FORCE : 44.1 N MAX
 - 1.2 WITHDRAWAL FORCE : 9.8 N MIN. AFTER 5,000 CYCLES MATING: 0.5kgf MIN.
 - ELECTRICAL :
 - 2.1 CONTACT CURRENT RATING: 0.5A MIN.
 - 2.2 VOLTAGE RATING : 40V AC (rms)
 - 2.3 WITHSTANDING VOLTAGE: 500 VAC FOR 1 MINUTE.
 - 2.4 INSULATION RESISTANCE: 100 MEGAOHMS MIN
 - 2.5 CONTACT RESISTANCE: 30 MILLIOHMS MAX.
 - ENVIRONMENTAL :
 - 3.1 OPERATING TEMPERATURE: -25°C TO +85°C

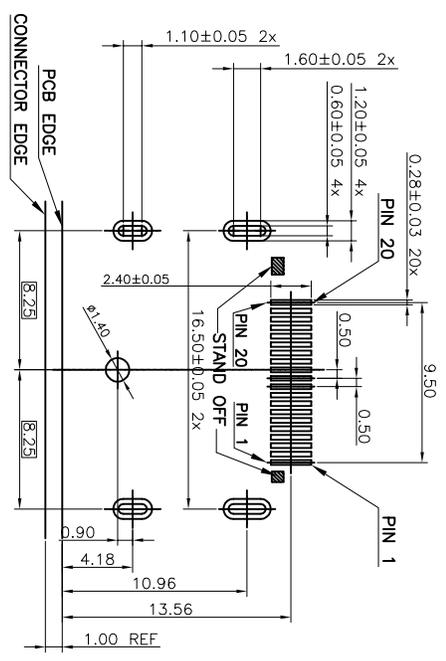

QTY'S	PART	SPECIFICATION	ITEM
1	COVER	LCP BLACK UL94V-0	④
20	CONTACT	COPPER ALLOY, GOLD FLASH PLATED ON CONTACT AREA TIN PLATING ON SOLDER AREA, NI PLATING UNDER OVER ALL	③
1	HOUSING	LCP BLACK UL94V-0	②
1	SHELL	COPPER ALLOY, NI PLATING OVER ALL	①

公差一览表 TOLERANCE UNLESS OTHERWISE		单位 UNITS		比例 SCALE		日期 DATE		核准 Appd		产品料号 PRODUCT PART NO.		产品名称 PRODUCT NAME		联系方式 CONTACT INFO	
X	±0.30	X'	±5°	X	1:1	2009/10/20	王冠 Wangguang	雷永健 Leiyongjian	雷永健 Leiyongjian	17005-DPAF008-X	DisplayPort 20PIN 母座 带M2.0	DisplayPort 20PIN 母座 带M2.0	螺丝 SMT 卧式 有柱 OH-8-78	mailto:sale1@xf1.com	www.xf1.com.com
XX	±0.20	XX'	±2°	XX			雷永健 Leiyongjian	雷永健 Leiyongjian	雷永健 Leiyongjian						
XXX	±0.15	XXX'	±1°	XXX											

产品图
PRODUCT CHART DWG
深圳市鑫风雷电子有限公司
Shenzhen xinfenglei Electronics Co., Ltd

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO XINFENGLI ELECTRONIC CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION