



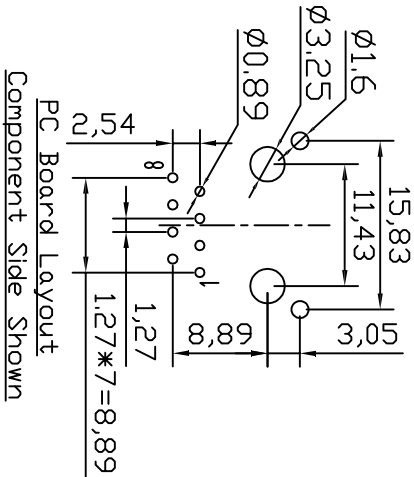


RoHS 客户图

目錄 MAPX	變更內容 MODIFICATION	日期 DATE
A0	NEW	09-10-20

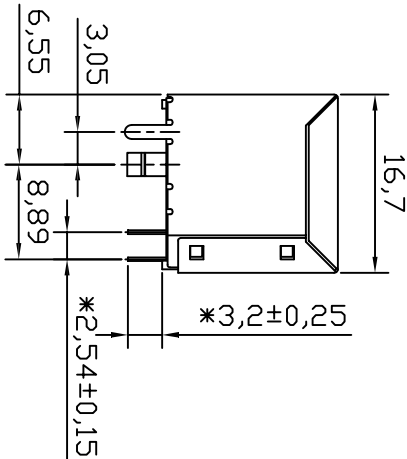

SPECIFICATION NOTES:

ELECTRICAL:

1. VOLTAGE RATING: 125 VAC RMS
2. CURRENT RATING: 1.5 AMP
3. CONTACT RESISTANCE: 3 0mΩ MAX.
4. INSULATION RESISTANCE: 500M ΩMIN. AT 500V DC.
5. DIELECTRIC STRENGTH: 1000 VAC 50Hz 1MINUTE

MECHANICAL:

1. HOUSING/INSERT MATERIAL:
THERMOPLASTIC, PBT UL94V-0,COLOR BLACK
2. CONTACT MATERIAL:PHOSPHOR BRONZE φ0.46
3. PLATING:GOLD PLATING OVER NICKEL, PLATED NICKEL 30-50U". SN 100-120U. GOLD PLATED ON CONTENT AREA FU/3U/6U/15U/30U"
4. OPERATING LIFE: 750 CYCLES MIN.

ENVIRONMENTAL:

1. STORAGE: -40° C TO +85° C
2. OPERATION: 0° C TO 75° C

产品图

PRODUCT CHART DWG

公差一览表

公差一览表	UNIT	制图	王冠	产品料号
TOLERANCE UNLESS OTHERWISE	UNITS	DRAWING	Wongguan	PRODUCT PART NO
X ±0.30	X'	±5'	比例	17013-RJ45F03-X
.X ±0.25	X'	±2'	SCALE	
.XX ±0.20	.XX'	±1'	日期	
.XXX ±0.15	.XXX'	±0.5'	2009/10/20	
		DATE	审核	
		APPD	核准	
			雷永健	
			Leiyongjian	
			联系方式	
			Mailbox: sale1@xfll.com	
			www.xfll.com.cn	

深圳市鑫风雷电子有限公司
Shenzhen xinfenglei Electronics Co., Ltd