

1.30±0.05
0.80±0.05

目錄
MAPX


變更內容
MODIFICATION

日期
DATE


A0

NEW



09-10-20

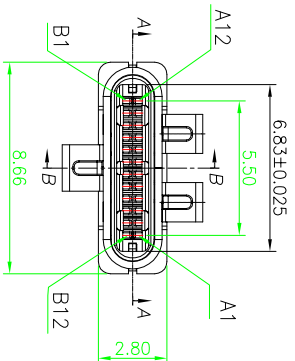

SECTION:A-A



SECTION:B-B

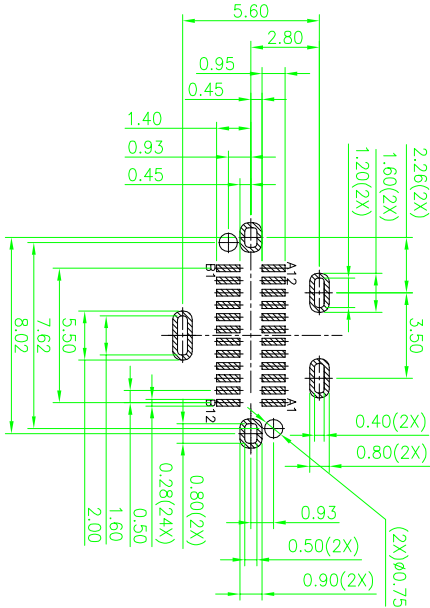

RECOMMENDED PCB LAYOUT(THICKNESS:0.80MM)
PWB TOLERANCE: ±0.05

SPECIFICATION:

- 1.MECHANICAL PERFORMANCE:
3-1.INSERTION FORCE: 0.1~0.7mgf.
3-2.REMOVAL FORCE: 0.1~0.7mgf.
3-3.DURABILITY: 1000 CYCLES.
2.ELECTRICAL PERFORMANCE:
4-1. CURRENT RATINGS:5.0V
VOLTAGE RATINGS:5.0V

- 4-2. LGF:
SOLDER SMO/ANY
SOLDER MAX. CHANGE OF ALL PINS: 10mΩ.
4-3.INSULATION RESISTANCE: 100MΩ MIN.
4-4.DIELECTRIC WITHSTAND VOLTAGE:AC 100V FOR 1 MINUTE.
3. ENVIRONMENTAL PERFORMANCE:
OPERATING TEMPERATURE: -25°C~+85°C.
4.R. REFLOW:
THE PEAK TEMPERATURE ON THE BOARD SHALL
BE MAINTAINED FOR 10 SECONDS AT 260°C.

产品图

PRODUCT CHART DWG






公差一览表

TOLERANCE UNLESS OTHERWISE	公差
X	±0.30
.XX	±0.25
.XXX	±0.15

深圳市鑫风雷电子有限公司

Shenzhen xinfenglei Electronics Co., Ltd

单位 UNITS	制图 DRAWING	产品料号 PRODUCT PART NO.
MM	王冠 Wangguan	24001-UCAM004-X
比例 SCALE	审核 CHECK	产品名称 PRODUCT NO.
1:1	雷永健 Lei Yongjian	Type C 24p 公头立式SMT三支脚 H=9.0
日期 DATE	批准 APPROVED	联系方式 CONTACT
2009/10/20	雷永健 Lei Yongjian	mailto:sale1@xfconn.com www.xfconn.com

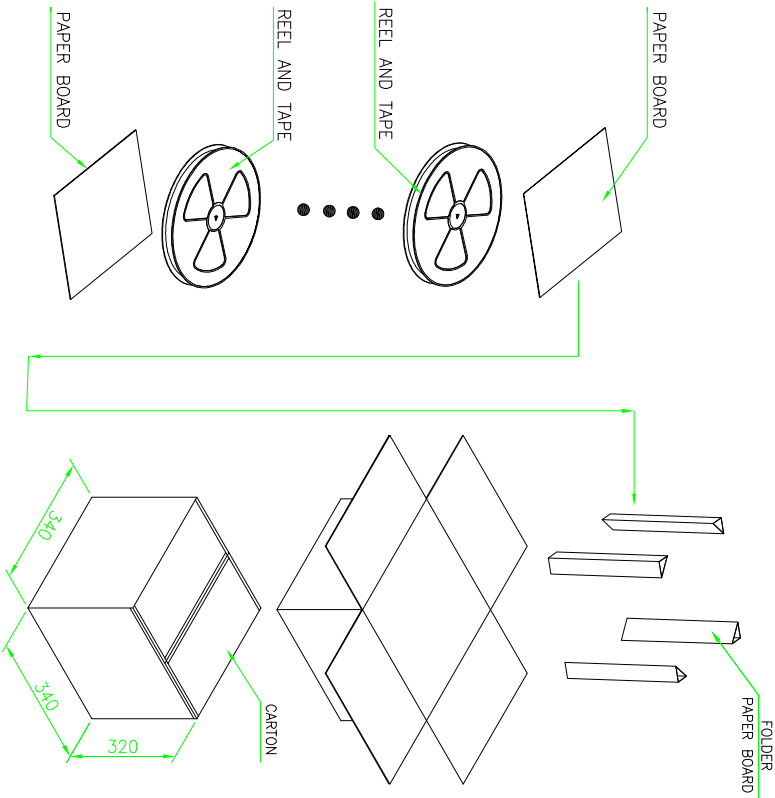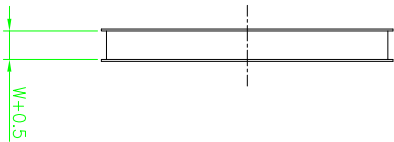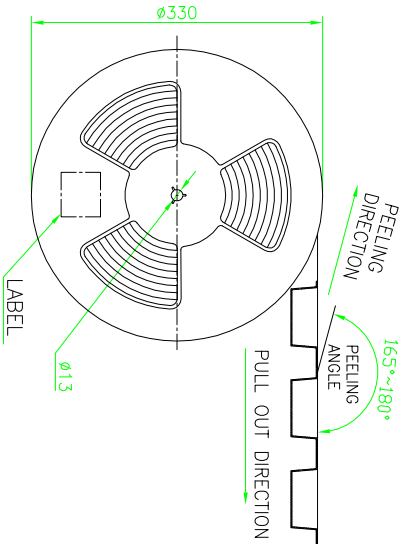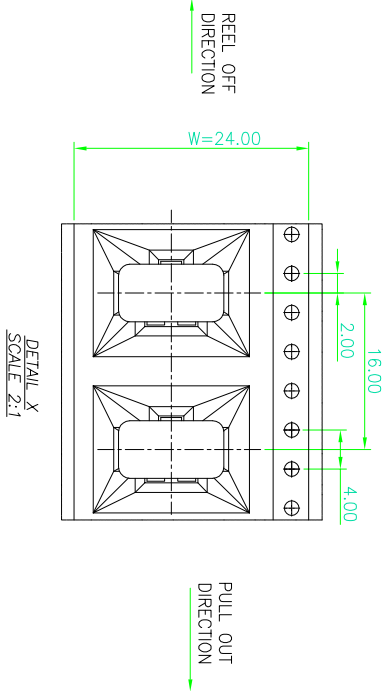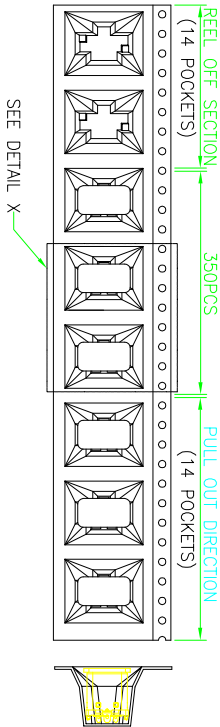

产品图

公差一览表

PRODUCT CHART DWG				深圳市鑫风雷电子有限公司 Shenzhen xinfenglei Electronics Co., Ltd			
TOLERANCE UNLESS OTHERWISE		UNIT	MM	制图	王冠 Wangguan	产品料号	24001-UCAM004-X
X	±0.30	X'	±5°	比例	1:1	审核	雷永健 Lei Yongjian
.X	±0.25	.X'	±2°	日期	2009/10/20	核准	雷永健 Lei Yongjian
.XX	±0.20	.XX'	±1°	DATE	2009/10/20	联系	雷永健 Lei Yongjian
.XXX	±0.15	.XXX'	±0.5°			方式	雷永健 Lei Yongjian

CONNECTOR (PCS)	REEL/TRAY	CARTON
	350	3500