
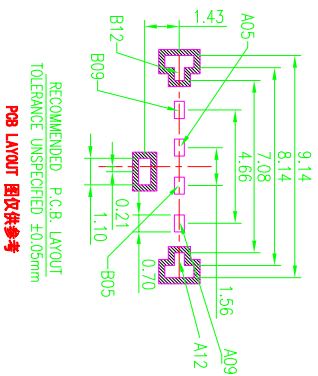







RoHS 客户图


TABLE B

A5	CC1	B12	GND
A9	VBUS	B9	VBUS
		B1	GND
		PN	SIGNAL NAME

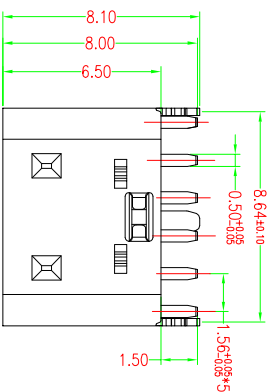

目錄 MAPX	變更內容 MODIFICATION	日期 DATE
A0	NEW	09-10-20

Cap dimensions

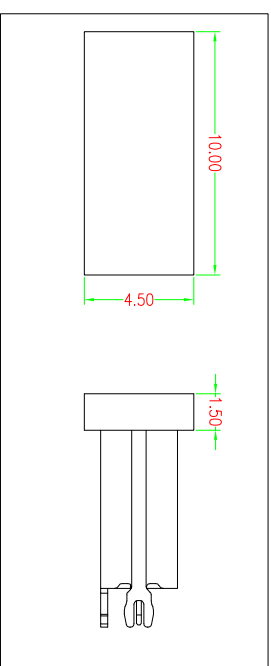

Note:

1.Material:

1.1 Housing: LCP

1.2 Contact: C7025, t=0.20mm

3U" min Au plating on contact area, 50 U" Tin plating on solder area.

1.3 Shell: SUS304-HIT=0.3mm

50U" Nickel Plating over all.

2.ELECTRICAL:

2-1: CURRENT RATING:
VBUS AND GND CONTACTS RATED AT 1.5A

PARALLELED FOR A TOTAL OF 3.0A;

2-2: INITIAL CONTACT RESISTANCE :40 MEGOHMS

2-3: DIELECTRIC WITHSTANDING VOLTAGE:

100V AC MIN;

3:MECHANICAL CHARACTERISTICS:

3-1: MATING FORCE: 5~20N

3-2: UNMATING FORCE: 8~20N(INITIAL),

6~20N(AFTER 10000 CYCLES)

3-3: FREQUENCY: 200±50 CYCLES / HOUR, 10000 CYCLES

3-4: OPERATING TEMPERATURE : -40°~80°.

产品图

深圳市鑫风雷电子有限公司

公差一览表 TOLERANCE UNLESS OTHERWISE SPECIFIED		单位 UNITS	MM	制图 DRAWING	王冠	产品料号 PRODUCT PART NO.	25001-UCAP006-B
X	±0.30	X'	±5'	审核 CHKD	雷永健	产品名称 PRODUCT NO.	TYPE C 6P母座180度DIP H=6.5 葫芦脚脚长1.5
X	±0.25	X'	±2'	核准 APRD	雷永健	角法 VIEW	
XXX	±0.30	XXX'	±1'	日期 DATE	2009/10/20	版本 VER	A0
XXX	±0.15	XXX'	±0.5'				